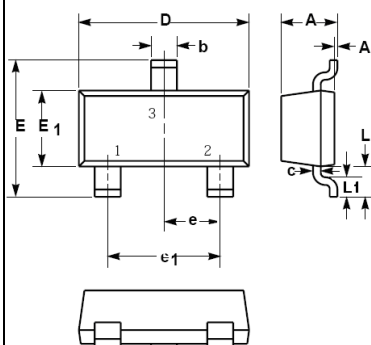


**SURFACE MOUNT
FAST SWITCHING DIODE**
**REVERSE VOLTAGE – 80 Volts
FORWARD CURRENT – 0.1 Ampere**
FEATURES

- Fast Switching Speed
- For general purpose switching applications

MECHANICAL DATA

- Case: SOT-23 Plastic
- Case Material: “Green” molding compound, UL flammability classification 94V-0, (No Br. Sb. Cl)
- Moisture Sensitivity: Level 1 per J-STD-020D
- Lead Free in RoHS 2002/95/EC Compliant

SOT-23


SOT-23		
Dim.	Min.	Max.
A	0.90	1.15
A1	0.00	0.10
b	0.30	0.50
c	0.08	0.15
D	2.80	3.00
E	2.25	2.55
E1	1.20	1.40
e	0.95 Typ.	
e1	1.80	2.00
L	0.55 Ref.	
L1	0.30	0.50
Dimensions in millimeter		

Maximum Ratings & Thermal Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	1SS181	Units
Non-Repetitive Peak Reverse Voltage	V_{RM}	85	V
DC Blocking Voltage	V_R	80	V
Forward Continuous Current	I_{FM}	300	mA
Average Rectified Output Current	I_O	100	mA
Non-Repetitive Peak Forward Surge Current @ $t=10\text{ms}$	I_{FSM}	2	A
Power Dissipation	P_D	150	mW
Operating Temperature Range	T_J	125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55~+125	$^\circ\text{C}$

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	$I_R = 100\mu\text{A}$	V_{BR}	80	--	--	V
Maximum Forward Voltage	$I_F = 1\text{mA}$	V_F	--	0.61	--	V
	$I_F = 10\text{mA}$		--	0.74	--	
	$I_F = 100\text{mA}$		--	0.92	1.2	
Maximum DC Reverse Current at Rated DC Blocking Voltage	$V_R = 30\text{V}$	I_R	--	--	0.1	μA
	$V_R = 80\text{V}$		--	--	0.5	
Typical Diode Capacitance	$V_R = 0\text{V}, f = 1\text{MHz}$	C_D	--	2.2	4	pF
Reverse Recovery time	$I_{RR} = 1\text{mA}$, $I_F = I_R = 10\text{mA}$, $R_L = 100\Omega$	t_{rr}	--	1.6	4	nS

REV. , Oct-2010, KSYR05

RATING AND CHARACTERISTIC CURVES 1SS181

LITEON

Fig.1 Typical Forward Characteristics

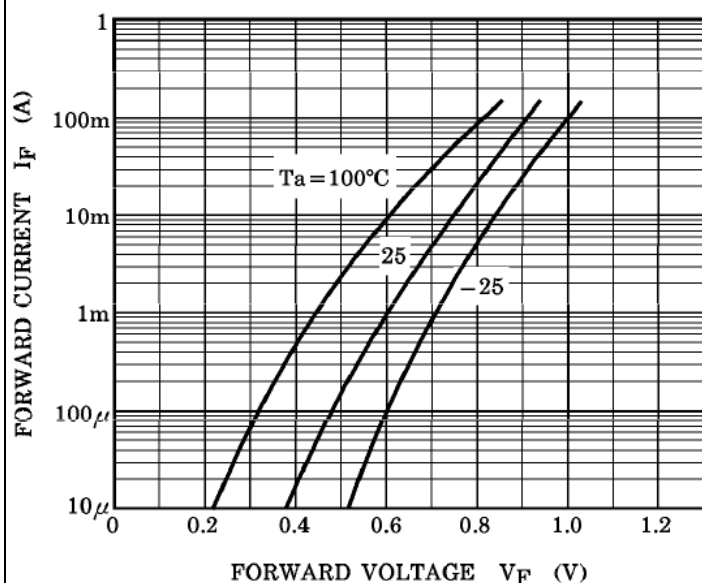


Fig.2 Typical Reverse Characteristics

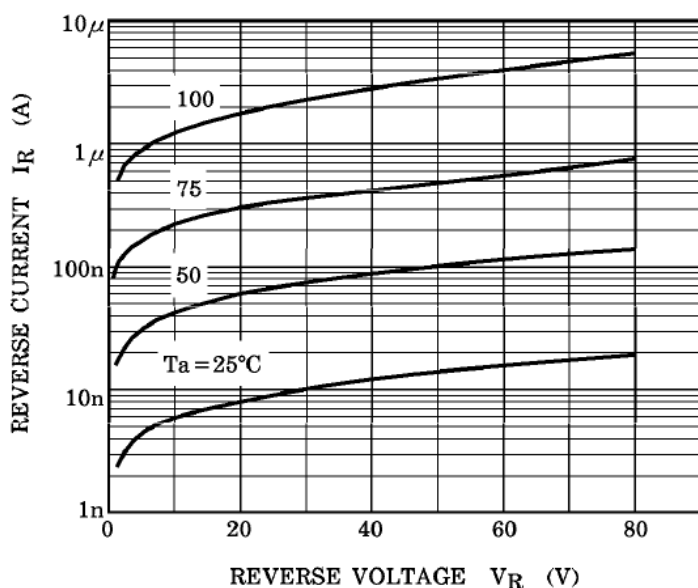


Fig.3 Total Capacitance vs. Reverse Voltage


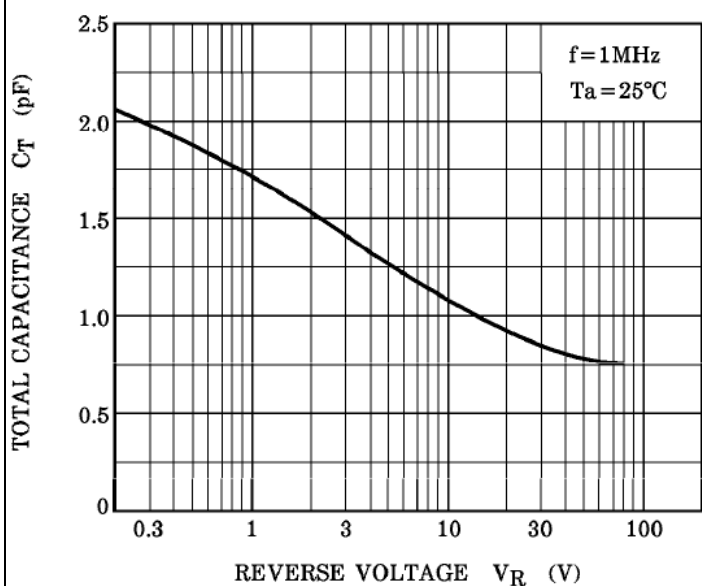


Fig.4 Reverse Recovery Time vs. Forward Current

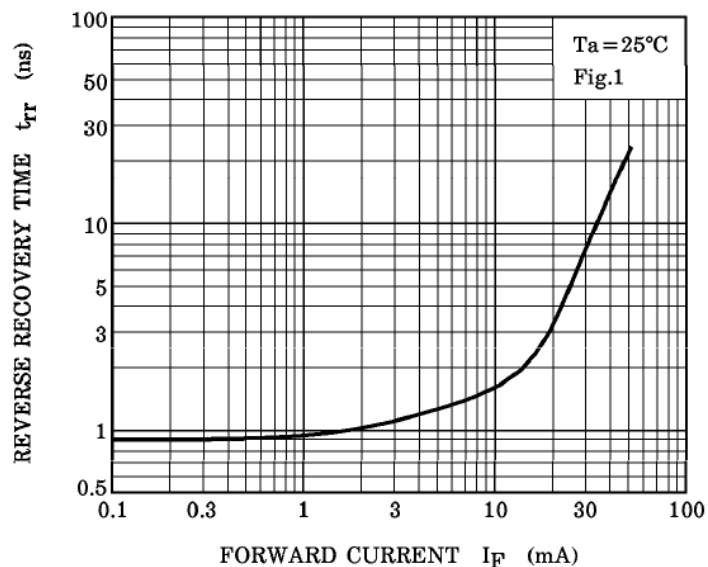

Device Marking :

Device P/N	Marking	Equivalent Circuit Diagram
1SS181	A3	

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.