

# LM49153 Boomer™ Mono Audio Subsystem with Class G Headphone Amplifier, Class D Speaker Amplifier, Noise Gate and Speaker Protection

Check for Samples: [LM49153](#)

## FEATURES

- Class G Ground Referenced Headphone Outputs
- High Efficiency Class D Amplifier with Spread Spectrum
- No Clip
- Speaker Protection
- Noise Gate
- I<sup>2</sup>C Volume and Mode Control
- Advanced Click-and-Pop Suppression
- Micro-Power Shutdown

## APPLICATIONS

- Feature Phones
- Smart Phones

## KEY SPECIFICATIONS

- Class G Headphone Amplifier,  
HPV<sub>DD</sub> = 1.8V, R<sub>L</sub> = 32Ω
  - IDDQ<sub>HP</sub>, 1.2mA (Typ)
  - P<sub>OUT</sub>, THD+N ≤ 1%, 25mW (Typ)
  - HP V<sub>OS</sub>, 0.5mV (Typ)
- Mono Class D Speaker Amplifier,  
R<sub>L</sub> = 8Ω, THD+N < 1%
  - P<sub>OUT</sub>, LSV<sub>DD</sub> = 5.0V, 1.35W (Typ)
  - P<sub>OUT</sub>, LSV<sub>DD</sub> = 3.6V, 680mW (Typ)
  - Efficiency 88% (Typ)

## DESCRIPTION

The LM49153 is a fully integrated audio subsystem designed for portable handheld applications such as cellular phones. Part of Texas Instruments' PowerWise family of products, the LM49153 combines an earpiece switch, a high efficiency 25mW class G headphone amplifier, and a high efficiency 1.35W class D loudspeaker into a single device.

The headphone amplifiers feature Texas Instruments' class G ground referenced architecture that creates a ground-referenced output with dynamic supply rails for optimum efficiency. The class D amplifier features an ALC (Automatic Level Control) with a noise gate that provides both no-clip and speaker protection.

Mode selection, shutdown control, and volume are controlled through an I<sup>2</sup>C compatible interface.

Click and pop suppression eliminates audible transients on power-up/down and during shutdown. The LM49153 is available in an ultra-small 25-bump 0.4mm pitch DSBGA package (2.30mm x 2.42mm).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Boomer is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

## Typical Application


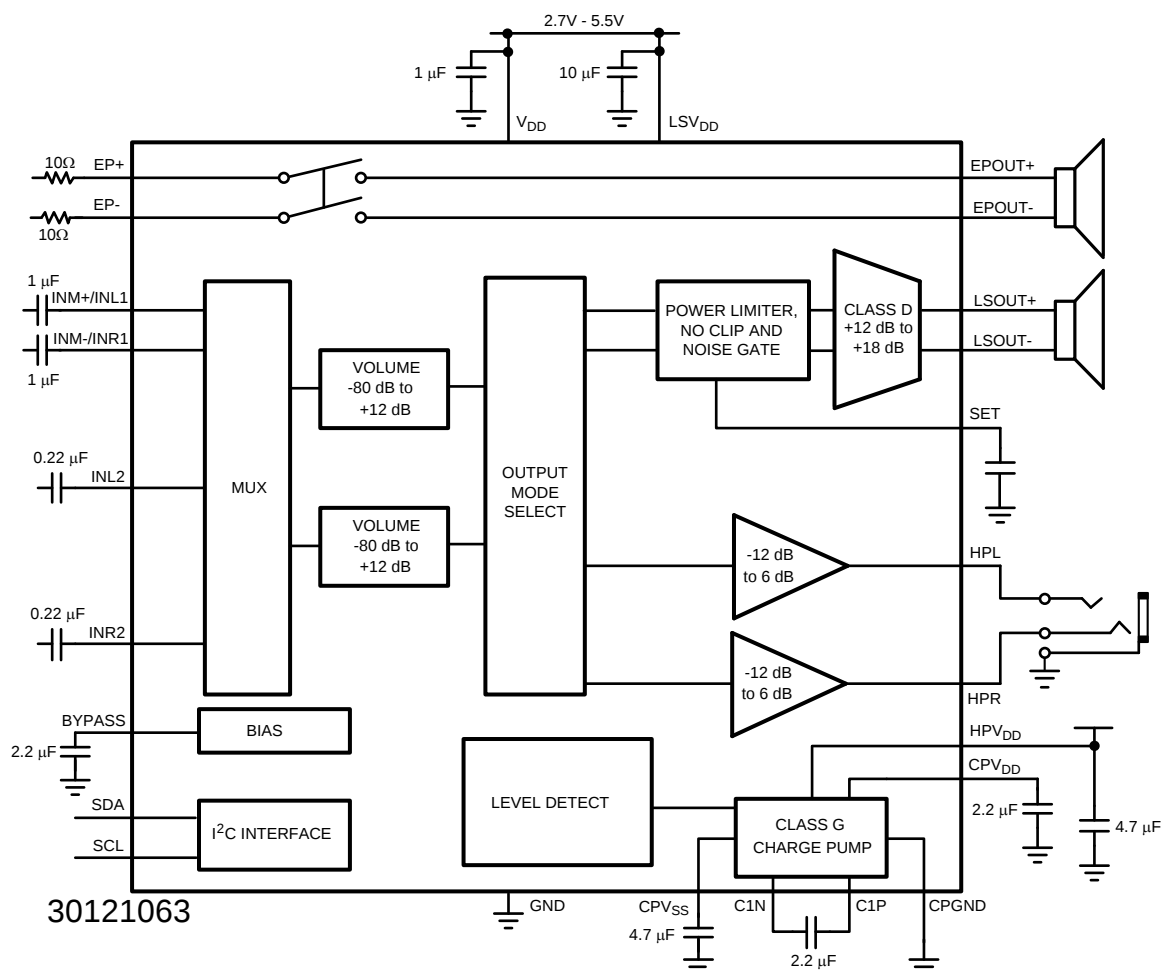


Figure 1. Typical Audio Amplifier Application Circuit

## Connection Diagram

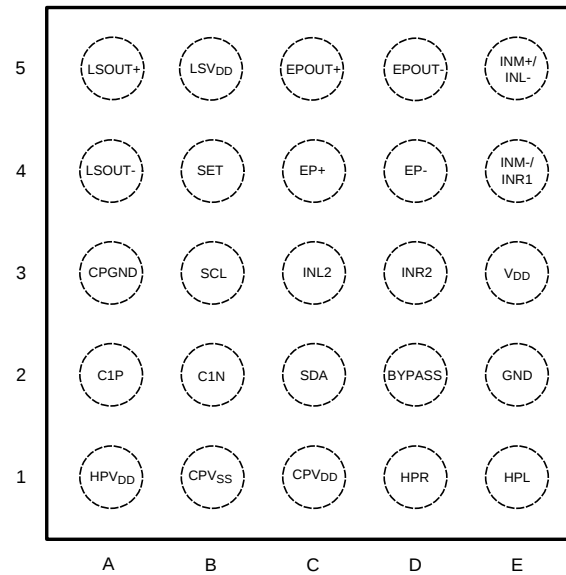

**Figure 2. 25 Bump DSBGA Package  
Top View  
See Package Number YFQ0025**

### BUMP DESCRIPTION

| Bump | Name              | Description                                           |
|------|-------------------|-------------------------------------------------------|
| A1   | HPV <sub>DD</sub> | Headphone Power Supply                                |
| A2   | C1P               | Charge Pump Flying Capacitor Positive Terminal        |
| A3   | CPGND             | Charge Pump Ground                                    |
| A4   | LSOUT-            | Loudspeaker Inverting Output                          |
| A5   | LSOUT+            | Loudspeaker Non-Inverting Output                      |
| B1   | CPV <sub>SS</sub> | Charge Pump Output                                    |
| B2   | C1N               | Charge Pump Flying Capacitor Negative Terminal        |
| B3   | SCL               | I <sup>2</sup> C Serial Clock Input                   |
| B4   | SET               | ALC Timing Set                                        |
| B5   | LSV <sub>DD</sub> | Loudspeaker Power Supply                              |
| C1   | CPV <sub>DD</sub> | Charge Pump Power Supply                              |
| C2   | SDA               | I <sup>2</sup> C Serial Data Input                    |
| C3   | INL2              | Left Channel Input 2                                  |
| C4   | EP+               | Earpiece Non-Inverting Input                          |
| C5   | EPOUT+            | Earpiece Non-Inverting Output                         |
| D1   | HPR               | Right Channel Headphone Output                        |
| D2   | BYPASS            | Mid-Rail Bias Bypass Node                             |
| D3   | INR2              | Right Channel Input 2                                 |
| D4   | EP-               | Earpiece Inverting Input                              |
| D5   | EPOUT-            | Earpiece Inverting Output                             |
| E1   | HPL               | Left Channel Headphone Output                         |
| E2   | GND               | Ground                                                |
| E3   | V <sub>DD</sub>   | Power Supply                                          |
| E4   | INM-/INR1         | Mono Channel Inverting Input/Right Channel Input 1    |
| E5   | INM+/INL1         | Mono Channel Non-Inverting Input/Left Channel Input 1 |



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### Absolute Maximum Ratings<sup>(1)(2)(3)</sup>

|                                                         |                                                              |                       |
|---------------------------------------------------------|--------------------------------------------------------------|-----------------------|
| Supply Voltage ( $V_{DD}$ , $LSV_{DD}$ ) <sup>(1)</sup> |                                                              | 6V                    |
| Supply Voltage ( $HPV_{DD}$ ) <sup>(1)</sup>            |                                                              | 3V                    |
| Storage Temperature                                     |                                                              | –635°C to +150°C      |
| Input Voltage                                           |                                                              | –0.3 to $V_{DD}$ +0.3 |
| Power Dissipation <sup>(4)</sup>                        |                                                              | Internally Limited    |
| ESD Rating <sup>(5)</sup>                               |                                                              | 2.0kV                 |
| ESD Rating <sup>(6)</sup>                               |                                                              | 200V                  |
| Junction Temperature                                    |                                                              | 150°C                 |
| Thermal Resistance                                      | $\theta_{JA}$ (YFQ0025)                                      | 46°C/W                |
| Soldering Information                                   | See AN-1112 (SNVA009) “DSBGA Wafer Level Chip Scale Package” |                       |

- (1) “*Absolute Maximum Ratings*” indicate limits beyond which damage to the device may occur, including inoperability and degradation of device reliability and/or performance. Functional operation of the device and/or non-degradation at the *Absolute Maximum Ratings* or other conditions beyond those indicated in the *Recommended Operating Conditions* is not implied. The *Recommended Operating Conditions* indicate conditions at which the device is functional and the device should not be operated beyond such conditions. All voltages are measured with respect to the ground pin, unless otherwise specified
- (2) The *Electrical Characteristics* tables list ensured specifications under the listed *Recommended Operating Conditions* except as otherwise modified or specified by the *Electrical Characteristics Conditions* and/or Notes. Typical specifications are estimations only and are not ensured.
- (3) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/Distributors for availability and specifications.
- (4) The maximum power dissipation must be derated at elevated temperatures and is dictated by  $T_{JMAX}$ ,  $\theta_{JA}$ , and the ambient temperature,  $T_A$ . The maximum allowable power dissipation is  $P_{DMAX} = (T_{JMAX} - T_A) / \theta_{JA}$  or the number given in *Absolute Maximum Ratings*, whichever is lower.
- (5) Human body model, applicable std. JESD22-A114C.
- (6) Machine model, applicable std. JESD22-A115-A.

### Operating Ratings

|                   |                                          |                                                         |
|-------------------|------------------------------------------|---------------------------------------------------------|
| Temperature Range | $T_{MIN} \leq T_A \leq T_{MAX}$          | $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ |
|                   | Supply Voltage ( $V_{DD}$ , $LSV_{DD}$ ) | $2.7\text{V} \leq V_{DD} \leq 5.5\text{V}$              |
|                   | Supply Voltage ( $HPV_{DD}$ )            | $1.7\text{V} \leq HPV_{DD} \leq 2.0\text{V}$            |

**Electrical Characteristics  $V_{DD} = 3.6V$ ,  $HPV_{DD} = 1.8V$ <sup>(1)(2)</sup>**

The following specifications apply for  $V_{DD} = LSV_{DD}$ ,  $A_V = 0dB$ ,  $R_L = 15\mu H + 8\Omega + 15\mu H$  (Loudspeaker),  $R_L = 32\Omega$  (Headphone),  $C_{SET} = 0.1\mu F$ ,  $f = 1kHz$ , ALC off, unless otherwise specified. Limits apply for  $T_A = 25^\circ C$ .<sup>(3)</sup>

| Symbol    | Parameter             | Conditions                                              | LM49153                |                       | Units<br>(Limits)    |
|-----------|-----------------------|---------------------------------------------------------|------------------------|-----------------------|----------------------|
|           |                       |                                                         | Typical <sup>(4)</sup> | Limits <sup>(5)</sup> |                      |
| $I_{DD}$  | Supply Current        | $V_{IN} = 0$ , No Load                                  |                        |                       |                      |
|           |                       | EP Receiver<br>(Output Mode Bit EP Bypass = 1)          | 0.3                    | 2.5                   | $\mu A$ (max)        |
|           |                       | LS only (Mode 2)<br>$V_{DD}$ , $LSV_{DD}$<br>$HPV_{DD}$ | 3.0<br>0               | 4.3                   | mA (max)<br>mA       |
|           |                       | HP only (Mode 1)<br>$V_{DD} + LSV_{DD}$<br>$HPV_{DD}$   | 1.8<br>1.2             | 2.5<br>1.6            | mA (max)<br>mA (max) |
|           |                       | LS + HP (Mode 6)<br>$V_{DD} + LSV_{DD}$<br>$HPV_{DD}$   | 4.3<br>1.2             | 5.5<br>1.6            | mA (max)<br>mA (max) |
| $I_{SD}$  | Shutdown Current      | $V_{SCL} = V_{SDA} = 3.6V$                              | 0.3                    | 2.5                   | $\mu A$ (max)        |
| $V_{OS}$  | Output Offset Voltage | $V_{IN} = 0$ , Mode 3, 6, 9                             |                        |                       |                      |
|           |                       | LS Output, $R_L = 8\Omega$ , $A_V = 12dB$               | 9                      |                       | mV                   |
|           |                       | HP Output, $R_L = 32\Omega$ , $A_V = 0dB$               | 0.5                    |                       | mV                   |
| $t_{WU}$  | Wake Up Time          | HP Mode, $C_{BYPASS} = 2.2\mu F$                        |                        |                       |                      |
|           |                       | Normal turn on time<br>Fast turn on time                | 32<br>18               |                       | ms<br>ms             |
| $A_{VOL}$ | Volume Control        | Mute                                                    | –86                    |                       | dB                   |
|           |                       | Minimum Gain Setting<br>(mono input)                    | –52.5                  | –51<br>–54            | dB (max)<br>dB (min) |
|           |                       | Maximum Gain Setting (mono input)                       | 12                     | 12.5<br>11.5          | dB (max)<br>dB (min) |
|           |                       | Minimum Gain Setting (stereo input)                     | –80                    |                       | dB (max)<br>dB (min) |
|           |                       | Maximum Gain Setting (stereo input)                     | 18                     |                       | dB (max)<br>dB (min) |

- (1) "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur, including inoperability and degradation of device reliability and/or performance. Functional operation of the device and/or non-degradation at the *Absolute Maximum Ratings* or other conditions beyond those indicated in the *Recommended Operating Conditions* is not implied. The *Recommended Operating Conditions* indicate conditions at which the device is functional and the device should not be operated beyond such conditions. All voltages are measured with respect to the ground pin, unless otherwise specified.
- (2) The *Electrical Characteristics* tables list ensured specifications under the listed *Recommended Operating Conditions* except as otherwise modified or specified by the *Electrical Characteristics Conditions* and/or Notes. Typical specifications are estimations only and are not ensured.
- (3) Loudspeaker  $R_L$  is a resistive load in series with two inductors to simulate an actual speaker load. For  $R_L = 8\Omega$ , the load is  $15\mu H + 8\Omega$ ,  $+15\mu H$ . For  $R_L = 4\Omega$ , the load is  $15\mu H + 4\Omega + 15\mu H$ .
- (4) Typical values represent most likely parametric norms at  $T_A = +25^\circ C$ , and at the *Recommended Operation Conditions* at the time of product characterization and are not specified.
- (5) Datasheet min/max specification limits are specified by test or statistical analysis.

**Electrical Characteristics  $V_{DD} = 3.6V$ ,  $HPV_{DD} = 1.8V^{(1)(2)}$  (continued)**

The following specifications apply for  $V_{DD} = LSV_{DD}$ ,  $A_V = 0dB$ ,  $R_L = 15\mu H + 8\Omega + 15\mu H$  (Loudspeaker),  $R_L = 32\Omega$  (Headphone),  $C_{SET} = 0.1\mu F$ ,  $f = 1kHz$ , ALC off, unless otherwise specified. Limits apply for  $T_A = 25^\circ C$ .<sup>(3)</sup>

| Symbol      | Parameter                                         | Conditions                                                                    | LM49153                |                       | Units<br>(Limits)                    |
|-------------|---------------------------------------------------|-------------------------------------------------------------------------------|------------------------|-----------------------|--------------------------------------|
|             |                                                   |                                                                               | Typical <sup>(4)</sup> | Limits <sup>(5)</sup> |                                      |
| $A_V$       | Gain                                              | LS Mode                                                                       |                        |                       |                                      |
|             |                                                   | Gain 0                                                                        | 12                     |                       | dB                                   |
|             |                                                   | Gain 1                                                                        | 18                     |                       | dB                                   |
|             |                                                   | HP Mode                                                                       |                        |                       |                                      |
|             |                                                   | Gain 0                                                                        | 6                      | 5<br>7                | dB (min)<br>dB (max)                 |
|             |                                                   | Gain 1                                                                        | 3                      |                       | dB                                   |
|             |                                                   | Gain 2                                                                        | 0                      |                       | dB                                   |
|             |                                                   | Gain 3                                                                        | -1.5                   |                       | dB                                   |
|             |                                                   | Gain 4                                                                        | -3                     |                       | dB                                   |
|             |                                                   | Gain 5                                                                        | -6                     |                       | dB                                   |
|             |                                                   | Gain 6                                                                        | -9                     |                       | dB                                   |
|             |                                                   | Gain 7                                                                        | -12                    | -13<br>-11            | dB (min)<br>dB (max)                 |
| $A_{VMUTE}$ | Mute Attention                                    | LS Output                                                                     | -80                    |                       | dB                                   |
|             |                                                   | HP Output                                                                     | -98                    |                       | dB                                   |
| $R_{IN}$    | Input Resistance                                  | Analog Switch                                                                 | 4.5                    | 6                     | $\Omega$ (max)                       |
|             |                                                   | MONO, RIN, LIN, Inputs                                                        |                        |                       |                                      |
|             |                                                   | Maximum Gain Setting                                                          | 13                     | 11<br>15.5            | k $\Omega$ (min)<br>k $\Omega$ (max) |
|             |                                                   | Minimum Gain Setting                                                          | 110                    | 90<br>130             | k $\Omega$ (min)<br>k $\Omega$ (max) |
| $P_O$       | Output Power                                      | LS Mode, $A_V = 18dB$ , $R_L = 8\Omega$                                       |                        |                       |                                      |
|             |                                                   | $LSV_{DD} = 3.3V$                                                             | 570                    |                       | mW                                   |
|             |                                                   | $LSV_{DD} = 3.6V$                                                             | 680                    | 620                   | mW (min)                             |
|             |                                                   | $LSV_{DD} = 4.2V$                                                             | 935                    |                       | mW                                   |
|             |                                                   | $LSV_{DD} = 5.0V$                                                             | 1350                   |                       | mW                                   |
|             |                                                   | HP Mode, $A_V = 6dB$                                                          |                        |                       |                                      |
|             |                                                   | $R_L = 16\Omega$                                                              | 25                     |                       | mW                                   |
|             |                                                   | $R_L = 32\Omega$                                                              | 25                     | 22                    | mW (min)                             |
| THD+N       | Total Harmonic Distortion + Noise                 | $f = 1kHz$                                                                    |                        |                       |                                      |
|             |                                                   | LS Mode, $P_O = 250mW$ , mono input                                           | 0.02                   |                       | %                                    |
|             |                                                   | HP Mode, $P_O = 12mW$ , Stereo input                                          | 0.02                   |                       | %                                    |
|             |                                                   | EP Bypass Mode, $R_L = 32\Omega$                                              | 0.05                   |                       | %                                    |
|             |                                                   |                                                                               |                        |                       |                                      |
| PSRR        | Power Supply Rejection Ratio<br>(Output referred) | $f = 217Hz$ , $V_{RIPPLE} = 200mV_{PP}$ ,<br>$C_B = 2.2\mu F$ , Inputs AC GND |                        |                       |                                      |
|             |                                                   | LS Mode, mono input, $A_V = 12dB$                                             | 72                     |                       | dB                                   |
|             |                                                   | LS Mode, stereo input, $A_V = 12dB$                                           | 64                     |                       | dB                                   |
|             |                                                   | HP Mode, mono input, ripple on $V_{DD}$                                       | 94                     |                       | dB                                   |
|             |                                                   | HP Mode, mono input, ripple on $HPV_{DD}$                                     | 81                     |                       | dB                                   |
|             |                                                   | HP Mode, stereo input, ripple on $V_{DD}$                                     | 80                     |                       | dB                                   |
| CMRR        | Common Mode Rejection Ratio                       | $V_{RIPPLE} = 1V_{P-P}$ , $f_{RIPPLE} = 217Hz$ , mono input, $A_V = 0dB$      |                        |                       |                                      |
|             |                                                   | LS Mode 2                                                                     | 38                     |                       | dB                                   |
|             |                                                   | HP Mode 1                                                                     | 51                     |                       | dB                                   |
| $\eta$      | Efficiency                                        | LS Mode, THD+N = 1%                                                           | 88                     |                       | %                                    |
| $X_{TALK}$  | Crosstalk                                         | $P_O = 12mW$ , $f = 1kHz$                                                     | 80                     |                       | dB                                   |

## Electrical Characteristics $V_{DD} = 3.6V$ , $HPV_{DD} = 1.8V^{(1)(2)}$ (continued)

The following specifications apply for  $V_{DD} = LSV_{DD}$ ,  $A_V = 0dB$ ,  $R_L = 15\mu H + 8\Omega + 15\mu H$  (Loudspeaker),  $R_L = 32\Omega$  (Headphone),  $C_{SET} = 0.1\mu F$ ,  $f = 1kHz$ , ALC off, unless otherwise specified. Limits apply for  $T_A = 25^\circ C$ .<sup>(3)</sup>

| Symbol          | Parameter               | Conditions                                                 | LM49153                |                       | Units<br>(Limits) |
|-----------------|-------------------------|------------------------------------------------------------|------------------------|-----------------------|-------------------|
|                 |                         |                                                            | Typical <sup>(4)</sup> | Limits <sup>(5)</sup> |                   |
| $\epsilon_{OS}$ | Output Noise            | A-weighted, Inputs AC GND                                  |                        |                       |                   |
|                 |                         | LS Mode, mono input                                        | 46                     |                       | $\mu V$           |
|                 |                         | LS Mode, stereo input                                      | 52                     |                       | $\mu V$           |
|                 |                         | HP Mode, mono input                                        | 11                     |                       | $\mu V$           |
|                 |                         | HP Mode, stereo input                                      | 11                     |                       | $\mu V$           |
| SNR             | Signal to Noise Ratio   | LS Mode, $P_O = 680mW$ , A-weighted, Mono                  | 94                     |                       | dB                |
|                 |                         | HP Mode, $P_O = 25mW$ , A-weighted                         | 98                     |                       | dB                |
| $t_A$           | Noise Gate Attack Time  | $I^2C = 1$                                                 | 0.1                    |                       | ms                |
|                 |                         | $I^2C = 0$                                                 | 0.9                    |                       | ms                |
| $t_R$           | Noise Gate Release Time | $I^2C = 0$                                                 | 1.2                    |                       | s                 |
|                 |                         | $I^2C = 1$                                                 | 2.1                    |                       | s                 |
| CC              | Clip Control            | Low 010                                                    | 7.3                    |                       | $V_{P-P}$         |
|                 |                         | Medium 011                                                 | 7.8                    |                       | $V_{P-P}$         |
|                 |                         | High 100                                                   | 8.1                    |                       | $V_{P-P}$         |
| $P_{LIMIT}$     | Output Power Limit      | LS Mode 1, THD+N $\leq 1\%$ , Voltage Level <sup>(6)</sup> |                        |                       |                   |
|                 |                         | 001                                                        | 4                      |                       | $V_{P-P}$         |
|                 |                         | 010                                                        | 4.8                    |                       | $V_{P-P}$         |
|                 |                         | 011                                                        | 5.6                    |                       | $V_{P-P}$         |
|                 |                         | 100                                                        | 6.4                    |                       | $V_{P-P}$         |
|                 |                         | 101                                                        | 7.2                    |                       | $V_{P-P}$         |
| $t_A$           | ALC Attack Time         |                                                            | 0.5                    |                       | ms                |
|                 |                         |                                                            | 200                    |                       | ms                |
| $t_R$           | ALC Release Time        |                                                            |                        |                       | ms                |

(6) The LM49153 ALC limits the output power to which ever is lower, the supply voltage or output power limit.

## $I^2C$ Interface Characteristics $V_{DD} = 3.6V^{(1)(2)}$

The following specifications apply for  $A_V = 0dB$ ,  $R_L = 8\Omega$ ,  $f = 1kHz$ , unless otherwise specified. Limits apply for  $T_A = 25^\circ C$ .

| Symbol   | Parameter            | Conditions | LM49153                |                       | Units<br>(Limits) |
|----------|----------------------|------------|------------------------|-----------------------|-------------------|
|          |                      |            | Typical <sup>(3)</sup> | Limits <sup>(4)</sup> |                   |
| $t_1$    | SCL Period           |            |                        | 2.5                   | $\mu s$ (min)     |
| $t_2$    | SDA Setup Time       |            |                        | 250                   | ns (min)          |
| $t_3$    | SDA Stable Time      |            |                        | 0                     | ns (min)          |
| $t_4$    | Start Condition Time |            |                        | 250                   | ns (min)          |
| $t_5$    | Stop Condition Time  |            |                        | 250                   | ns (min)          |
| $V_{IH}$ | Input High Voltage   |            |                        | 1.2                   | V (min)           |
| $V_{IL}$ | Input Low Voltage    |            |                        | 0.6                   | V (max)           |

- (1) "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur, including inoperability and degradation of device reliability and/or performance. Functional operation of the device and/or non-degradation at the *Absolute Maximum Ratings* or other conditions beyond those indicated in the *Recommended Operating Conditions* is not implied. The *Recommended Operating Conditions* indicate conditions at which the device is functional and the device should not be operated beyond such conditions. All voltages are measured with respect to the ground pin, unless otherwise specified
- (2) The *Electrical Characteristics* tables list ensured specifications under the listed *Recommended Operating Conditions* except as otherwise modified or specified by the *Electrical Characteristics Conditions* and/or Notes. Typical specifications are estimations only and are not ensured.
- (3) Typical values represent most likely parametric norms at  $T_A = +25^\circ C$ , and at the *Recommended Operation Conditions* at the time of product characterization and are not specified.
- (4) Datasheet min/max specification limits are specified by test or statistical analysis.

## Typical Performance Characteristics<sup>(1)</sup>

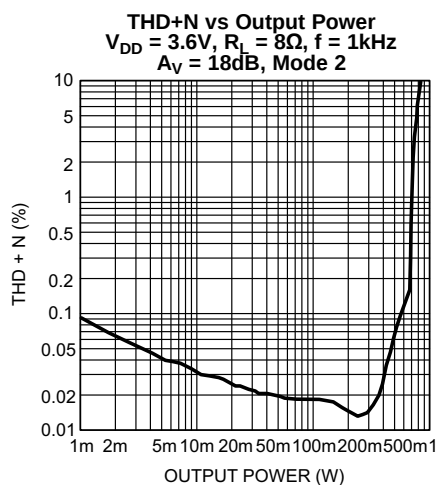


Figure 3.

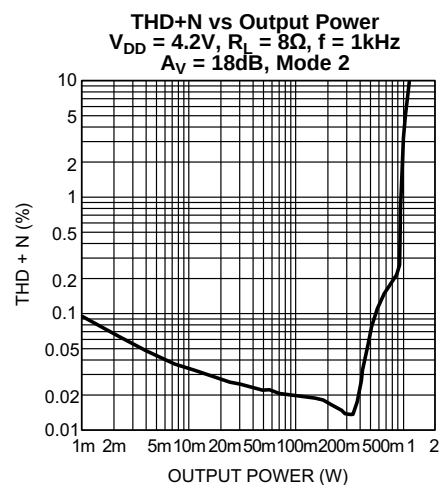


Figure 4.

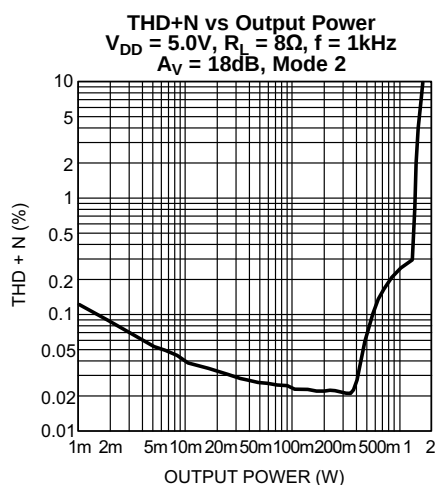


Figure 5.

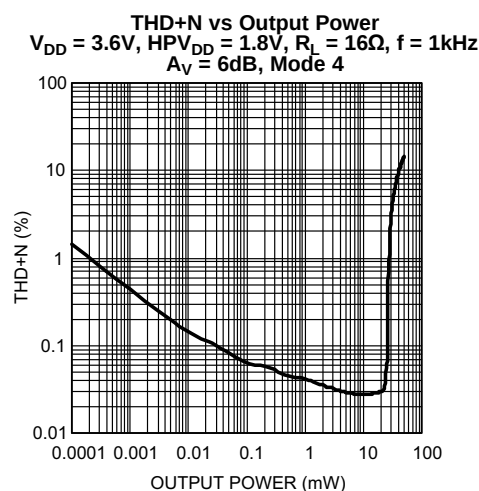


Figure 6.

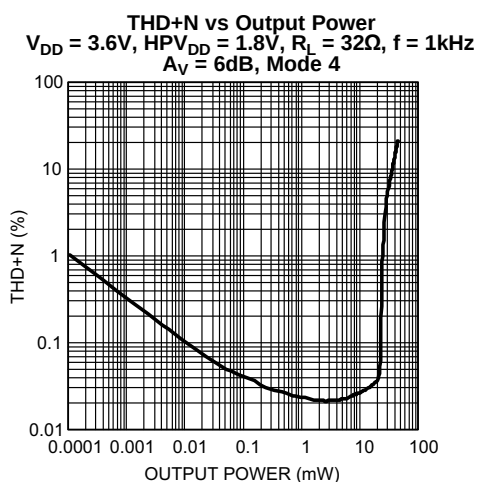


Figure 7.

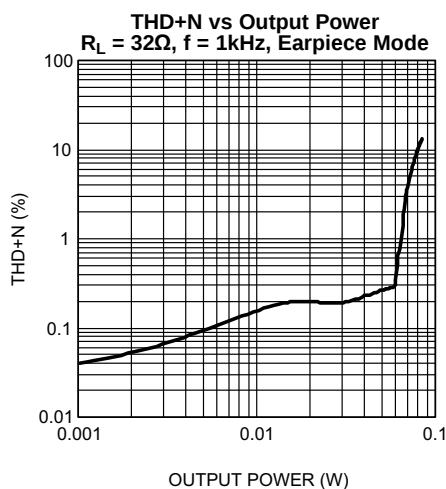


Figure 8.

(1) Loudspeaker  $R_L$  is a resistive load in series with two inductors to simulate an actual speaker load. For  $R_L = 8\Omega$ , the load is  $15\mu H + 8\Omega$ ,  $+15\mu H$ . For  $R_L = 4\Omega$ , the load is  $15\mu H + 4\Omega + 15\mu H$ .

## Typical Performance Characteristics<sup>(1)</sup> (continued)

**PSRR vs FREQUENCY**  
 $V_{DD} = 3.6V$ ,  $HPV_{DD} = 1.8V$ ,  $V_{DD-RIPPLE} = 200mV_{P-P}$   
 $R_L = 8\Omega$ , Mono Input, LS Mode

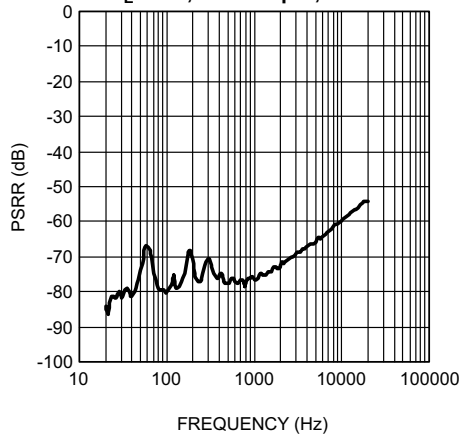


Figure 9.

**PSRR vs FREQUENCY**  
 $V_{DD} = 3.6V$ ,  $HPV_{DD} = 1.8V$ ,  $V_{DD-RIPPLE} = 200mV_{P-P}$   
 $R_L = 8\Omega$ , Stereo Input, LS Mode

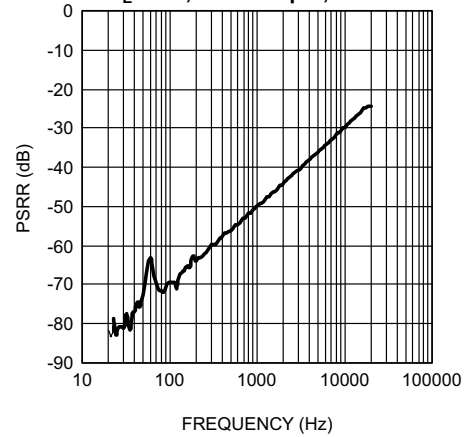


Figure 10.

**PSRR vs FREQUENCY**  
 $V_{DD} = 3.6V$ ,  $HPV_{DD} = 1.8V$ ,  $V_{DD-RIPPLE} = 200mV_{P-P}$   
 $R_L = 32\Omega$ , Mono Input, HP Mode

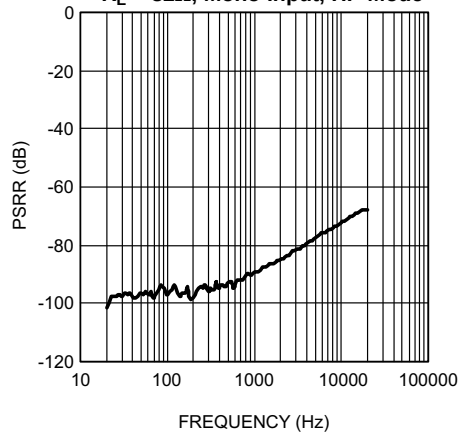


Figure 11.

**PSRR vs FREQUENCY**  
 $V_{DD} = 3.6V$ ,  $HPV_{DD} = 1.8V$ ,  $HPV_{DD-RIPPLE} = 200mV_{P-P}$   
 $R_L = 32\Omega$ , Mono Input, HP Mode

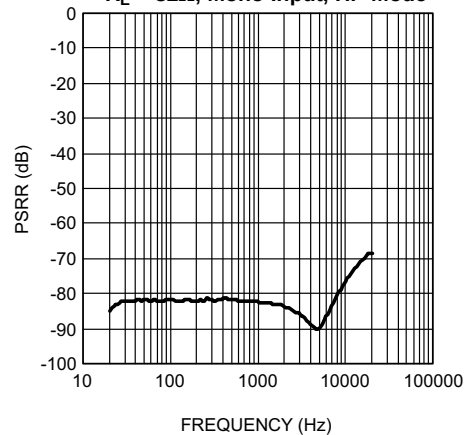


Figure 12.

**SUPPLY CURRENT vs SUPPLY VOLTAGE**  
 No Load, Loudspeaker Mode 2

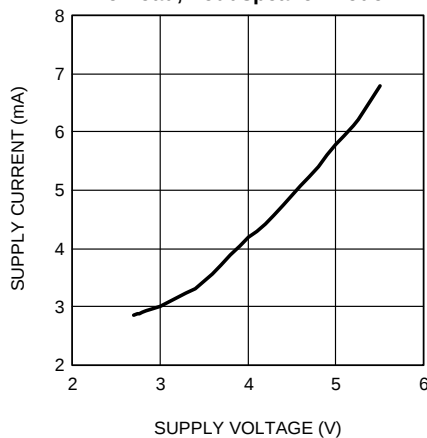


Figure 13.

**SUPPLY CURRENT vs SUPPLY VOLTAGE**  
 No Load, Loudspeaker Mode 4

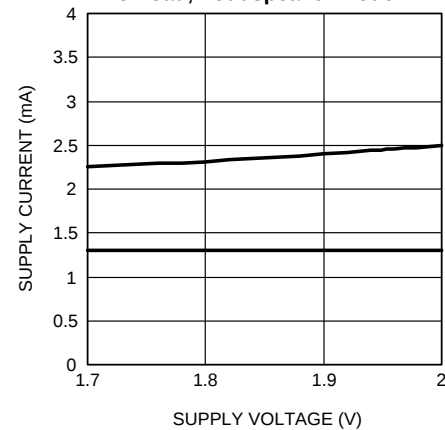


Figure 14.

### Typical Performance Characteristics<sup>(1)</sup> (continued)

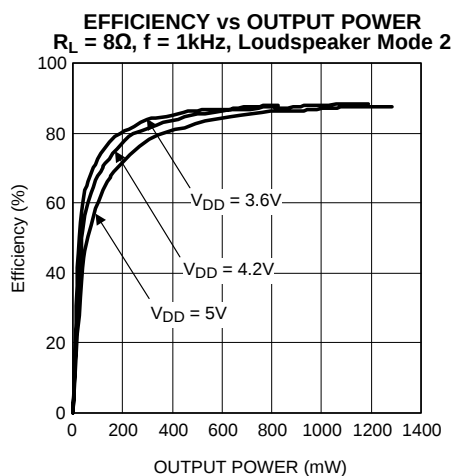


Figure 15.

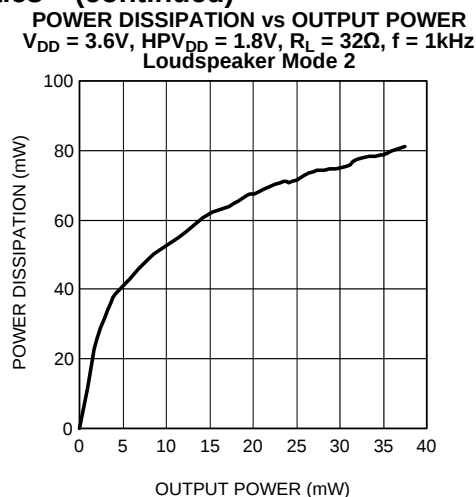


Figure 16.

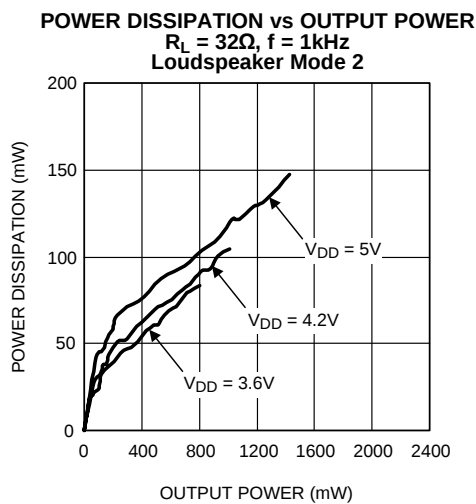


Figure 17.

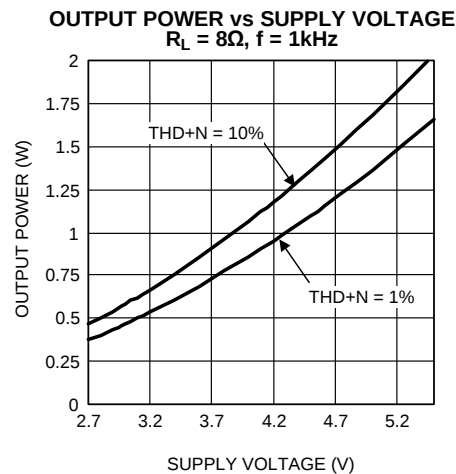


Figure 18.

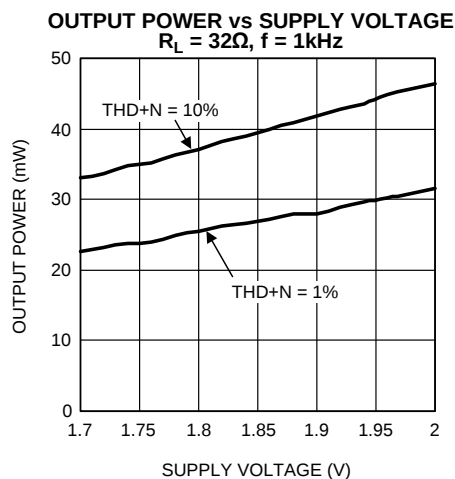


Figure 19.

## APPLICATION INFORMATION

### WRITE-ONLY I<sup>2</sup>C COMPATIBLE INTERFACE

The LM49153 is controlled through an I<sup>2</sup>C compatible serial interface that consists of a serial data line (SDA) and a serial clock (SCL). The clock line is uni-directional. The data line is bi-directional (open drain). The LM49153 and the master can communicate at clock rates up to 400kHz. Figure 20 shows the I<sup>2</sup>C interface timing diagram. Data on the SDA line must be stable during the HIGH period of SCL. The LM49153 is a transmit/receive slave-only device, reliant upon the master to generate the SCL signal. Each transmission sequence is framed by a START condition and a STOP condition (Figure 21). Each data word, device address and data, transmitted over the bus is 8 bits long and is always followed by an acknowledge pulse. The LM49153 device address is 1100000.

### I<sup>2</sup>C BUS FORMAT

The I<sup>2</sup>C bus format is shown in Figure 21. The START signal, the transition of SDA from HIGH to LOW while SCL is HIGH, is generated, alerting all devices on the bus that a device address is being written to the bus.

The 7-bit device address is written to the bus, most significant bit (MSB) first, followed by the  $\overline{R/W}$  bit.  $\overline{R/W} = 0$  indicates the master is writing to the slave device,  $\overline{R/W} = 1$  indicates the master wants to read data from the slave device. Set  $\overline{R/W} = 0$ ; the LM49153 is a WRITE-ONLY device and will not respond the  $\overline{R/W} = 1$ . The data is latched in on the rising edge of the clock. Each address bit must be stable while SCL is HIGH. After the last address bit is transmitted, the master device releases SDA, during which time, an acknowledge clock pulse is generated by the slave device. If the LM49153 receives the correct address, the device pulls the SDA line low, generating an acknowledge bit (ACK).

Once the master device registers the ACK bit, the 8-bit register data word is sent. Each data bit should be stable while SCL is HIGH. After the 8-bit register data word is sent, the LM49153 sends another ACK bit. Following the acknowledgement of the register data word, the master issues a STOP bit, allowing SDA to go high.

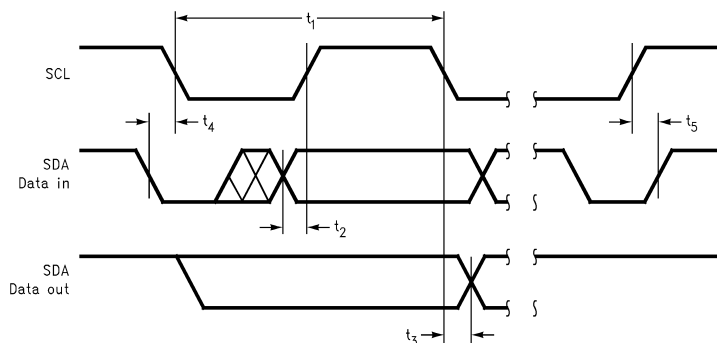


Figure 20. I<sup>2</sup>C Timing Diagram

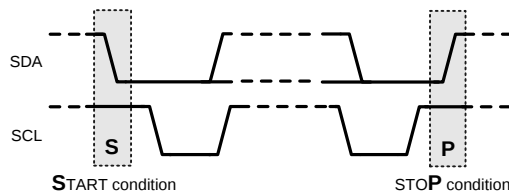


Figure 21. Example I<sup>2</sup>C Write Cycle

## DEVICE ADDRESS REGISTER

**Table 1. Device Address**

|                | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 ( $\overline{W}$ ) |
|----------------|----|----|----|----|----|----|----|-----------------------|
| Device Address | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0                     |

## I<sup>2</sup>C CONTROL REGISTER

**Table 2. I<sup>2</sup>C Control**

| Register Name         | B7 | B6 | B5 | B4                  | B3               | B2                  | B1                 | B0           |
|-----------------------|----|----|----|---------------------|------------------|---------------------|--------------------|--------------|
| Shutdown control      | 0  | 0  | 0  | 1                   | GAMP_ON          | HPR_SD              | ClassG_SD          | PWR_ON       |
| Mode control          | 0  | 0  | 1  | EP                  | MODE_CONTROL     |                     |                    |              |
| Power limiter control | 0  | 1  | 0  | ATTACK_TIME         |                  | POWER_LEVEL         |                    |              |
| No clip control       | 0  | 1  | 1  | RELEASE_TIME        |                  | OUTPUT_CLIP_CONTROL |                    |              |
| Gain control          | 1  | 0  | 0  | 0                   | LSGAIN           | HP_GAIN             |                    |              |
| Volume control        | 1  | 0  | 1  | LS_VOLUME/HP_VOLUME |                  |                     |                    |              |
| LS control            | 1  | 1  | 0  | 0                   | NOISE_GATE_LEVEL |                     | NOISE_GATE_TIME    |              |
| Other control         | 1  | 1  | 1  | 0                   | 0                | 0                   | 0                  | 0            |
| Class-G control       | 1  | 1  | 1  | 0                   | 1                | 0                   | CLASS_G_TRIP_LEVEL |              |
| Other control         | 1  | 1  | 1  | 1                   | 0                | 0                   | SS_EN              | TURN_ON TIME |

## SHUTDOWN CONTROL REGISTER

**Table 3. Shutdown Control**

| Bit | Name       | Value | Description                                                                         |
|-----|------------|-------|-------------------------------------------------------------------------------------|
| B0  | PWR_ON     |       | This enables or disables the device.                                                |
|     |            | 0     | Device disabled                                                                     |
|     |            | 1     | Device enabled                                                                      |
| B1  | Class G_SD |       | This enables or disables the Class G of the headphone.                              |
|     |            | 0     | Class G enabled                                                                     |
|     |            | 1     | Class G disabled                                                                    |
| B2  | HPR_SD     |       | This disables the right headphone output.                                           |
|     |            | 0     | Normal Operation                                                                    |
|     |            | 1     | Right headphone disabled                                                            |
| B3  | GAMP_ON    |       | This disables the gain amplifiers that are not in use to minimize I <sub>DD</sub> . |
|     |            | 0     | Normal Operation                                                                    |
|     |            | 1     | Disable unused gain amplifiers                                                      |

## MODE CONTROL REGISTER

**Table 4. Mode Control**

| Bits  | Field        | Description                                |                                 |                      |     |    |                                                  |                   |
|-------|--------------|--------------------------------------------|---------------------------------|----------------------|-----|----|--------------------------------------------------|-------------------|
| B3:B0 | MODE_CONTROL | This set the different mixer output modes. |                                 |                      |     |    |                                                  |                   |
|       |              | Mode                                       | Input (Diff/SE) <sup>(1)</sup>  | Input <sup>(2)</sup> | SPK | HP | LS                                               | HP(L) HP ( R )    |
|       |              | 0                                          | 0                               | X                    | 0   | 0  | SD                                               | SD SD             |
|       |              | 1                                          | 0                               | X                    | 0   | 1  | SD                                               | GM X M GM X M     |
|       |              | 2                                          | 0                               | X                    | 0   | 1  | GM <sup>(3)</sup> X M <sup>(4)</sup>             | SD SD             |
|       |              | 3                                          | 0                               | X                    | 1   | 1  | GM X M                                           | GM X M GM X M     |
|       |              | 4                                          | 1                               | 0                    | 0   | 1  | SD                                               | GST X L1 GST X R1 |
|       |              | 5                                          | 1                               | 0                    | 1   | 0  | GST <sup>(5)</sup> X (L1 + R1) <sup>(6)(7)</sup> | SD SD             |
|       |              | 6                                          | 1                               | 0                    | 1   | 1  | GST X (L1 + R1)                                  | GST X L1 GST X R1 |
|       |              | 7                                          | 1                               | 1                    | 0   | 1  | SD <sup>(8)</sup>                                | GST X L2 GST X R2 |
|       |              | 8                                          | 1                               | 1                    | 1   | 0  | GST X (L2 + R2) <sup>(6)(7)</sup>                | SD SD             |
|       |              | 9                                          | 1                               | 1                    | 1   | 1  | GST X (L2 + R2)                                  | GST X L2 GST X R2 |
| B4    | EP           | This enables the receiver bypass path.     |                                 |                      |     |    |                                                  |                   |
|       |              | 0                                          | Normal output mode operation    |                      |     |    |                                                  |                   |
|       |              | 1                                          | Enable the receiver bypass path |                      |     |    |                                                  |                   |

- (1) 0: Differential, 1: Single-Ended  
 (2) 0: Stereo 1CH, 1: Stereo 2CH  
 (3) G<sub>M</sub>: Differential input gain path  
 (4) M: Mono differential input  
 (5) G<sub>ST</sub>: Single-Ended input path  
 (6) R1/R2: Right channel stereo input  
 (7) L1/L2: Left channel stereo input  
 (8) SD: Shutdown

## VOLTAGE LIMIT CONTROL REGISTER

**Table 5. Shutdown Control**

| Bits  | Field         | Description                                                                                           |                                             |
|-------|---------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------|
| B2:B0 | VOLTAGE_LEVEL | This sets the output voltage limit level.                                                             |                                             |
|       |               | 000                                                                                                   | Voltage limit disabled                      |
|       |               | 001                                                                                                   | V <sub>TH(VLIM)</sub> = 4.0V <sub>P-P</sub> |
|       |               | 010                                                                                                   | V <sub>TH(VLIM)</sub> = 4.8V <sub>P-P</sub> |
|       |               | 011                                                                                                   | V <sub>TH(VLIM)</sub> = 5.6V <sub>P-P</sub> |
|       |               | 100                                                                                                   | V <sub>TH(VLIM)</sub> = 6.4V <sub>P-P</sub> |
|       |               | 101                                                                                                   | V <sub>TH(VLIM)</sub> = 7.2V <sub>P-P</sub> |
|       |               | 110                                                                                                   | V <sub>TH(VLIM)</sub> = 8.0V <sub>P-P</sub> |
|       |               | 111                                                                                                   | Voltage limit disabled                      |
| B4:B3 | ATTACK_TIME   | This sets the attack time of the automatic limiter control circuit based on C <sub>SET</sub> = 0.1μF. |                                             |
|       |               | 00                                                                                                    | 0.7ms                                       |
|       |               | 01                                                                                                    | 0.975ms                                     |
|       |               | 10                                                                                                    | 1.5ms                                       |
|       |               | 11                                                                                                    | 2.025ms                                     |

**NO CLIP CONTROL REGISTER****Table 6. No Clip Control**

| Bits  | Field               | Description                                                          |
|-------|---------------------|----------------------------------------------------------------------|
| B2:B0 | OUTPUT_CLIP_CONTROL | This sets the output voltage limit level.                            |
|       |                     | 000 No Clip disabled, output clip control disabled                   |
|       |                     | 010 No Clip enabled, output clip control disabled                    |
|       |                     | 011 Low                                                              |
|       |                     | 100 Med                                                              |
|       |                     | 101 High                                                             |
| B4:B3 | RELEASE_TIME        | This sets the release time of the automatic limiter control circuit. |
|       |                     | 00 1s                                                                |
|       |                     | 01 0.8s                                                              |
|       |                     | 10 0.65s                                                             |
|       |                     | 11 0.4s                                                              |

**GAIN CONTROL REGISTER****Table 7. Gain Control**

| Bits  | Field   | Description                                  |
|-------|---------|----------------------------------------------|
| B2:B0 | HP_GAIN | This sets the headphone output gain level.   |
|       |         | 000 0dB                                      |
|       |         | 001 -1.5dB                                   |
|       |         | 010 -3dB                                     |
|       |         | 011 -6dB                                     |
|       |         | 100 -9dB                                     |
|       |         | 101 -12dB                                    |
|       |         | 110 -15dB                                    |
|       |         | 111 -18dB                                    |
| B3    | LS_GAIN | This sets the loudspeaker output gain level. |
|       |         | 0 12dB                                       |
|       |         | 1 18dB                                       |

**VOLUME CONTROL REGISTER****Table 8. Volume Control**

| VOLUME STEP | _G4 | _G3 | _G2 | _G1 | _G0 | Stereo GAIN (dB) | Mono GAIN (dB) |
|-------------|-----|-----|-----|-----|-----|------------------|----------------|
| 1           | 0   | 0   | 0   | 0   | 0   | -109             | -115           |
| 2           | 0   | 0   | 0   | 0   | 1   | -46.5            | -52.5          |
| 3           | 0   | 0   | 0   | 1   | 0   | -40.5            | -46.5          |
| 4           | 0   | 0   | 0   | 1   | 1   | -34.5            | -40.5          |
| 5           | 0   | 0   | 1   | 0   | 0   | -30              | -36            |
| 6           | 0   | 0   | 1   | 0   | 1   | -27              | -33            |
| 7           | 0   | 0   | 1   | 1   | 0   | -24              | -30            |
| 8           | 0   | 0   | 1   | 1   | 1   | -21              | -27            |
| 9           | 0   | 1   | 0   | 0   | 0   | -18              | -24            |
| 10          | 0   | 1   | 0   | 0   | 1   | -15              | -21            |
| 11          | 0   | 1   | 0   | 1   | 0   | -13.5            | -19.5          |
| 12          | 0   | 1   | 0   | 1   | 1   | -12              | -18            |

**Table 8. Volume Control (continued)**

| VOLUME STEP | _G4 | _G3 | _G2 | _G1 | _G0 | Stereo GAIN (dB) | Mono GAIN (dB) |
|-------------|-----|-----|-----|-----|-----|------------------|----------------|
| 13          | 0   | 1   | 1   | 0   | 0   | -10.5            | -16.5          |
| 14          | 0   | 1   | 1   | 0   | 1   | -9               | -15            |
| 15          | 0   | 1   | 1   | 1   | 0   | -7.5             | -13.5          |
| 16          | 0   | 1   | 1   | 1   | 1   | -6               | -12            |
| 17          | 1   | 0   | 0   | 0   | 0   | -4.5             | -10.5          |
| 18          | 1   | 0   | 0   | 0   | 1   | -3               | -9             |
| 19          | 1   | 0   | 0   | 1   | 0   | -1.5             | -7.5           |
| 20          | 1   | 0   | 0   | 1   | 1   | 0                | -6             |
| 21          | 1   | 0   | 1   | 0   | 0   | 1.5              | -4.5           |
| 22          | 1   | 0   | 1   | 0   | 1   | 3                | -3             |
| 23          | 1   | 0   | 1   | 1   | 0   | 4.5              | -1.5           |
| 24          | 1   | 0   | 1   | 1   | 1   | 6                | 0              |
| 25          | 1   | 1   | 0   | 0   | 0   | 7.5              | 1.5            |
| 26          | 1   | 1   | 0   | 0   | 1   | 9                | 3              |
| 27          | 1   | 1   | 0   | 1   | 0   | 10.5             | 4.5            |
| 28          | 1   | 1   | 0   | 1   | 1   | 12               | 6              |
| 29          | 1   | 1   | 1   | 0   | 0   | 13.5             | 7.5            |
| 30          | 1   | 1   | 1   | 0   | 1   | 15               | 9              |
| 31          | 1   | 1   | 1   | 1   | 0   | 16.5             | 10.5           |
| 32          | 1   | 1   | 1   | 1   | 1   | 18               | 12             |

## NOISE GATE CONTROL REGISTER

**Table 9. Noise Gate Control**

| Bits  | Field            | Description                                       |
|-------|------------------|---------------------------------------------------|
| B1:B0 | NOISE_GATE_TIME  | This sets the noise gate attack and release time. |
|       |                  | 00 0.9ms 1.2s                                     |
|       |                  | 01 0.9ms 2.1s                                     |
|       |                  | 10 0.1ms 1.2s                                     |
|       |                  | 11 0.1ms 2.1s                                     |
| B4:B3 | NOISE_GATE_LEVEL | This sets the noise gate trip level *             |
|       |                  | 000 Noise gate disabled                           |
|       |                  | 010 Low — 26mV <sub>RMS</sub>                     |
|       |                  | 011 Medium — 40mV <sub>RMS</sub>                  |
|       |                  | 100 High — 60mV <sub>RMS</sub>                    |

## CLASS-G CONTROL REGISTER

**Table 10. Class-G Control**

|       |                    |                                                                                    |                                    |
|-------|--------------------|------------------------------------------------------------------------------------|------------------------------------|
| B4:B3 | CLASS_G_TRIP_LEVEL | This sets the Class G trip level and determines when the headphone rails switches. |                                    |
|       |                    | 00                                                                                 | Highest Level Trip Point (Default) |
|       |                    | 01                                                                                 | High Level Trip Point              |
|       |                    | 10                                                                                 | Medium Level Trip Point            |
|       |                    | 11                                                                                 | Low Level Trip Point               |

## OTHER CONTROL REGISTER

**Table 11. Other Control**

|    |              |                               |                          |
|----|--------------|-------------------------------|--------------------------|
| B0 | TURN_ON_TIME | This sets the turn on time.   |                          |
|    |              | 0                             | Normal Turn On Time      |
|    |              | 1                             | Fast Turn On Time        |
| B1 | SS_EN        | This enables Spread Spectrum. |                          |
|    |              | 0                             | Spread Spectrum Disabled |
|    |              | 1                             | Spread Spectrum Enabled  |

## DIFFERENTIAL AMPLIFIER EXPLANATION

The LM49153 features a differential input stage for the mono inputs, which offers improved noise rejection compared to a single-ended input amplifier. Because a differential input amplifier amplifies the difference between the two input signals, any component common to both signals is cancelled. An additional benefit of the differential input structure is the possible elimination of the DC input blocking capacitors. Since the DC component is common to both inputs, and thus cancelled by the amplifier, the LM49153 can be used without input coupling capacitors when configured with a differential input signal.

## INPUT MIXER/MULTIPLEXER

The LM49153 includes a comprehensive mixer multiplexer controlled through the I<sup>2</sup>C interface. The mixer/multiplexer allows any input combination to appear on any output of LM49153. Multiple input paths can be selected simultaneously. Under these conditions, the selected inputs are mixed together and output on the selected channel. [Table 4](#) (MODE CONTROL) shows how the input signals are mixed together for each possible input selection.

## SHUTDOWN FUNCTION

The LM49153 features the following shutdown controls: Bit B4 (GAMP\_ON) of the SHUTDOWN CONTROL register controls the gain amplifiers. When GAMP\_SD = 1, it disables the gain amplifiers that are not in use. For example, in Modes 1, 4 and 5, the Mono inputs are in use, so the Left and Right input gain amplifiers are disabled, causing the I<sub>DD</sub> to be minimized. Bit B0 (PWR\_ON) of the SHUTDOWN CONTROL register is the global shutdown control for the entire device. Set PWR\_ON = 0 for normal operation. PWR\_ON = 1 overrides any other shutdown control bit.

## CLASS D AMPLIFIER

The LM49153 features a mono class D audio power amplifier with a filterless modulation scheme that reduces external component count, conserving board space and reducing system cost. With no signal applied, the outputs (LSOUT+ and LSOUT-) switch between VDD and GND with 50% duty cycle, in phase, causing the two outputs to cancel. This cancellation results in no net voltage across the speaker, thus there is no current to the load in the idle state.

With an input signal applied, the duty cycle (pulse width) of the class D output changes. For increasing output voltage, the duty cycle of LSOUT+ increases, while the duty cycle of LSOUT- decreases. For decreasing output voltages, the converse occurs. The difference between the two pulse widths yields the differential output voltage.

## ENHANCED EMISSION SUPPRESSION (E<sup>2</sup>S)

The LM49153 class D amplifier features Texas Instruments' patent-pending E<sup>2</sup>S system that reduces EMI, while maintaining high quality audio reproduction and efficiency. The E<sup>2</sup>S system features selectable spread spectrum and advanced edge rate control (ERC). The LM49153 class D ERC greatly reduces the high frequency components of the output square waves by controlling the output rise and fall times, slowing the transitions to reduce RF emissions, while maximizing THD+N and efficiency performance.

## SPREAD SPECTRUM

The selectable spread spectrum mode minimizes the need for output filters, ferrite beads or chokes. In spread spectrum mode, the switching frequency varies randomly by 30% about a 300kHz center frequency, reducing the wideband spectral content, improving EMI emission radiated by the speaker and associated cables and traces. Where a fixed frequency class D exhibits large amounts of spectral energy at multiples of the switching frequency, the spread spectrum architecture spreads that energy over a larger bandwidth. The cycle-to-cycle variation of the switching period does not affect the audio reproduction, efficiency, or PSRR. Set bit B0 (SS\_EN) of the SS CONTROL register to 1 to enable spread spectrum mode.

## GROUND REFERENCE HEADPHONE AMPLIFIER

The LM49153 features a low noise inverting charge pump that generates an internal negative supply voltage. This allows the headphone outputs to be biased about GND instead of a nominal DC voltage, like traditional headphone amplifiers. Because there is no DC component, the large DC blocking capacitors (typically 220μF) are not necessary. The coupling capacitors are replaced by two small ceramic charge pump capacitors, saving board space and cost. Eliminating the output coupling capacitors also improves low frequency response. In traditional headphone amplifiers, the headphone impedance and the output capacitor from a high-pass filter that not only blocks the DC component of the output, but also attenuates low frequencies, impacting the bass response. Because the LM49153 does not require the output coupling capacitors, the low frequency response of the device is not degraded by external components. In addition to eliminating the output coupling capacitors, the ground referenced output nearly doubles the available dynamic range of the LM49153 headphone amplifiers when compared to a traditional headphone amplifier operating from the same supply voltage.

## EARPIECE (EP) BYPASS


When B4 of MODE\_CONTROL register is set to 1, earpiece amplifier is enabled and differential inputs are passed down to speaker outputs. This in turn disables the class D amplifier.

## AUTOMATIC LIMITER CONTROL (ALC)

When enabled, the ALC continuously monitors and adjusts the gain of the loudspeaker amplifier signal path if necessary. The ALC serves two functions: voltage limiter/speaker protection and output clip prevention (No-Clip) with three clip controls levels. The voltage limiter/speaker protection prevents an output overload condition by maintaining the loudspeaker output signal below a preset amplitude (See [VOLTAGE LIMITER](#) section). The No Clip feature monitors the output signal and maintains audio quality by preventing the loudspeaker output from exceeding the amplifier's headroom (see [NO CLIP/OUTPUT CLIP CONTROL](#) section). The voltage limiter thresholds, clip control levels, attack and release times are configured through the I<sup>2</sup>C interface.

## VOLTAGE LIMITER


The voltage limiter function of the ALC monitors and prevents the audio signal from exceeding the voltage limit threshold (Figure 22). The voltage limit threshold ( $V_{TH(VLIM)}$ ) is set by bits B2:B0 in the Voltage Limit Threshold Register (see [Table 5](#)). Although the ALC reduces the gain of the speaker path to maintain the audio signal below the voltage limit threshold, it is still possible to overdrive the speaker output in which case loudspeaker output will exceed the voltage limit threshold and cause clipping on the output, and speaker damage is possible. Please see the [ALC HEADROOM](#) section for further details.

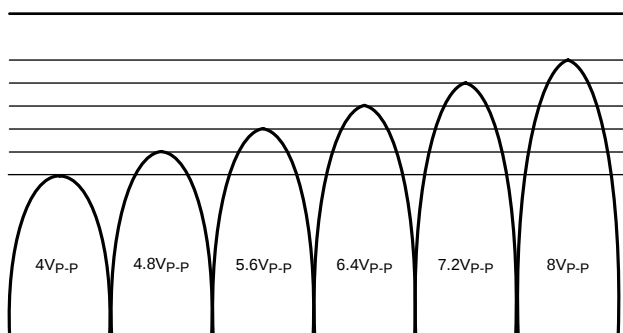

**Figure 22. Voltage Limit Output Level**


## NO CLIP/OUTPUT CLIP CONTROL

The LM49153 No Clip circuitry detects when the loudspeaker output is near clipping and reduces the signal gain to prevent output clipping and preserve audio quality (Figure 23). Although the ALC reduces the gain of the speaker path to prevent output clipping, it is still possible to overdrive the speaker output. Please see the [ALC HEADROOM](#) section for further details.

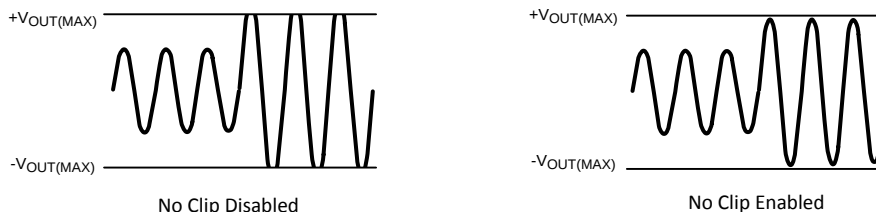

**Figure 23. No Clip Function**

The LM49153 also features an output clip control that allows a certain amount of clipping at the output in order to increase the loudspeaker output power. The clip level is set by B2:B0 in the No Clip Control Register (see [Table 6](#)). The clip control works by allowing the output to enter clipping before the ALC turns on and maintains the output level. The clip control has three levels: low, medium, and high. The low and high clip level control settings give the lowest distortion and highest distortion respectively on the output (see [SHUTDOWN FUNCTION](#)). The actual output level of the device will depend upon the supply voltage, and the output power will depend upon the load impedance.

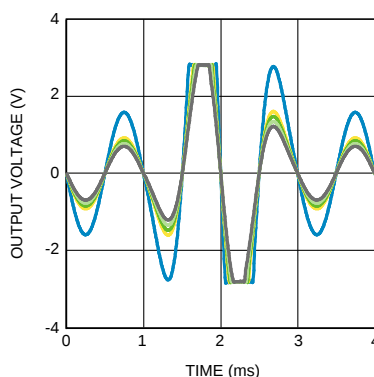

**Figure 24. Clip Control Levels**


## ALC HEADROOM

When either voltage limiter or no clip is enabled, it is still possible to drive LM49153 into clipping by overdriving the input volume stage of the signal path beyond its output dynamic range. In this case, clipping occurs at the input volume stage, and although ALC is active, the gain reduction will have no effect on the output clipping. The maximum input that can safely pass through the input volume stage can be calculated by following formula:


$$V_{IN} \leq \frac{V_{DD}}{A_v \text{ (volume gain)}} \quad (1)$$

So in the case of 0 dB volume gain, audio input has to be less than  $V_{DD}$  for both voltage limiter or No clip settings.

When voltage limiter is enabled, ALC can reach its max attenuation for lower voltage limit levels as shown in the [Figure 26](#). Typically, after the ALC started working, with 6dB of audio input change ALC is well within its regulation. Voltage limiter Input headroom can be increased by switching to the LS\_GAIN to 18dB in the Gain Control Register (see [Table 7](#)).

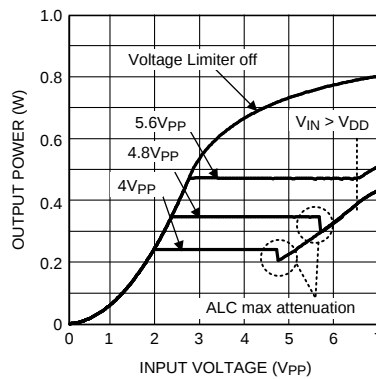

**Figure 25. Voltage Limiter Function**  
 $V_{DD} = 3.3V$ ,  $R_L = 8\Omega + 30\mu H$   
 $f_{IN} = 1kHz$ ,  $LS\_GAIN = 0$

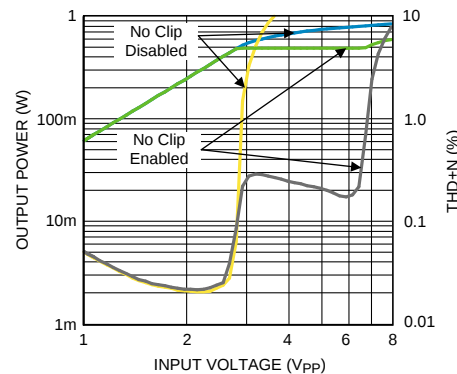

**Figure 26. No Clip Function**  
 $V_{DD} = 3.3V$ ,  $R_L = 8\Omega + 30\mu H$   
 $f_{IN} = 1kHz$ ,  $LS\_GAIN = 0$   
 Gray, Yellow = THD+N vs Input Voltage

When No Clip is enabled, class D speaker output reduces when it's about to enter clipping region and power stay constant as long as  $V_{IN}$  is less than  $V_{DD}$  for 0dB volume gain (see Figure 26). For example, in the case of  $V_{DD} = 3.3V$ , there is a 6dB of headroom for the change in input. Please see the ALC typical performance curves for additional plots relating to different supply voltages and  $LS\_GAIN$  settings for specific application parameters.

## ATTACK TIME

Attack time ( $t_{ATK}$ ) is the time it takes for the gain to be reduced by 6dB ( $LS\_GAIN = 0$ ) once the audio signal exceeds the ALC threshold. Fast attack times allow the ALC to react quickly and prevent transients such as symbol crashes from being distorted. However, fast attack times can lead to volume pumping, where the gain reduction and release becomes noticeable, as the ALC cycles quickly. Slower attack times cause the ALC to ignore the fast transients, and instead act upon longer, louder passages. Selecting an attack time that is too slow can lead to increased distortion in the case of the No Clip function, and possible output overload conditions in the case of the Voltage limiter. The attack time is set by a combination of the value of  $C_{SET}$  and the attack time coefficient as given by Equation 2:

$$t_{ATK} = 20k\Omega C_{SET} / \alpha_{ATK} \quad (2)$$

Where  $\alpha_{ATK}$  is the attack time coefficient (Table 12) set by bits B4:B3 in the Voltage Limit Control Register (see Table 5). The attack time coefficient allows the user to set a nominal attack time. The internal 20k $\Omega$  resistor is subject to temperature change, and it has tolerance between -11% to +20%.

**Table 12. Attack Time Coefficient**

| B5 | B4 | $\alpha_{ATK}$ |
|----|----|----------------|
| 0  | 0  | 2.667          |
| 0  | 1  | 2              |
| 1  | 0  | 1.333          |
| 1  | 1  | 1              |

## RELEASE TIME

Release time ( $t_{RL}$ ) is the time it takes for the gain to return from 6dB ( $LS\_GAIN = 0$ ) to its normal level once the audio signal returns below the ALC threshold. A fast release time allows the ALC to react quickly to transients, preserving the original dynamics of the audio source. However, similar to a fast attack time, a fast release time contributes to volume pumping. A slow release time reduces the effect of volume pumping. The release time is set by a combination of the value of  $C_{SET}$  and release time coefficient as given by [Equation 3](#):

$$t_{RL} = 20M\Omega C_{SET} / \alpha_{RL} \quad (s) \quad (3)$$

where  $\alpha_{RL}$  is the release time coefficient ([Table 13](#)) set by bits B4:B3 in the No Clip Control Register. The release time coefficient allows the user to set a nominal release time. The internal 20M $\Omega$  is subject to temperature change, and it has tolerance between -11% to +20%.

**Table 13. Release Time Coefficient**

| B5 | B4 | $\alpha_{RL}$ |
|----|----|---------------|
| 0  | 0  | 2             |
| 0  | 1  | 2.5           |
| 1  | 0  | 3             |
| 1  | 1  | 5             |

## PROPER SELECTION OF EXTERNAL COMPONENTS

### ALC Timing ( $C_{SET}$ ) Capacitor Selection

The recommended range value of  $C_{SET}$  is between .01 $\mu$ F to 1 $\mu$ F. Lowering the value below .01 $\mu$ F can increase the attack time but LM49153 ALC ability to regulate its output can be disrupted and approaches the hard limiter circuit. This in turn increases the THD+N and audio quality will be severely affected.

### Charge Pump Capacitor Selection

Use low ESR ceramic capacitors (less than 100m $\Omega$ ) for optimum performance.

### Charge Pump Flying Capacitor (C1)

The flying capacitor (C1) affects the load regulation and output impedance of the charge pump. A C1 value that is too low results in a loss of current drive, leading to a loss of amplifier headroom. A higher valued C1 improves load regulation and lowers charge pump output impedance to an extent. Above 2.2 $\mu$ F, the  $R_{DS(ON)}$  of the charge pump switches and the ESR of C1 and C2 dominate the output impedance. A lower value capacitor can be used in systems with low maximum output power requirements.

### Charge Pump Hold Capacitor (C2)

The value and ESR of the hold capacitor (C2) directly affects the ripple on  $CPV_{SS}$ . Increasing the value of C2 reduces output ripple. Decreasing the ESR of C2 reduces both output ripple and charge pump output impedance. A lower value capacitor can be used in systems with low maximum output power requirements.

### Input Capacitor Selection

Input capacitors may be required for some applications, or when the audio source is single-ended. Input capacitors block the DC component of the audio signal, eliminating any conflict between the DC component of the audio source and the bias voltage of the LM49153. The input capacitors create a high-pass filter with the input resistors  $R_{IN}$ . The -3dB point of the high-pass filter is found using [Equation 4](#) below.

$$f = 1 / 2\pi R_{IN} C_{IN} \quad (\text{Hz}) \quad (4)$$

Where the value of  $R_{IN}$  is given in the Electrical Characteristics Table.

High-pass filtering the audio signal helps protect the speakers. When the LM49153 is using a single-ended source, power supply noise on the ground is seen as an input signal. Setting the high-pass filter point above the power supply noise frequencies, 217Hz in a GSM phone, for example, filters out the noise such that it is not amplified and heard on the output. Capacitors with a tolerance of 10% or better are recommended for impedance matching and improved CMRR and PSRR.

## DEMO BOARD GUIDELINES

### Introduction

The LM49153 demoboard is shown in Figure TBD.

#### Quick Start Guide:

1. Connect the one end of the USB cable to the PC that will be used to control the demo board and the other end to J1 of the LM49153 demo board.
2. Install the LM49153 I<sup>2</sup>C interface software.
3. Apply 2.7V to 5.5V to the header labeled  $V_{DD}$  and apply a ground connection to the header labeled GND above C5.
4. Apply 1.7V to 2.0V to the header labeled  $HPV_{DD}$  and apply a ground connection to the header labeled GND7.
5. Apply a mono differential signal or two single-ended signal to headers labeled INM-/INR1 and INM+/INL1. Then, apply a single-ended signal to headers labeled INL2 and INR2.
6.
  - (a) For class D speaker output, connect a speaker or load ( $\geq 4\Omega$ ) to LSOUT- and LSOUT+ header pins (a low pass filter may be required for measurements).
  - (b) For headphone output, connect either through headphone output jack or HPR and HPL header pins.
7. Run the LM49153 I<sup>2</sup>C interface software, select desired mode, set 0dB volume gain, and Power on options from the GUI.

### Board Features

The LM49153 demonstration board has all of the necessary connections, using 100mil headers, to apply the power supply voltage and the audio input signals. The Class D amplifier's output is available on 100mil headers. The Class AB headphone's amplified audio signal is available on both a stereo headphone jack and 100 mil headers. The input and output of the earpiece analog switch are also available on 100mil headers. On-board I<sup>2</sup>C signal generation microcontroller allows for a convenient connection via USB jack.

### Connections


| Headers/Jumpers Description | Function/Use                                                                                                                                                                 |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $V_{DD}$ and GND            | Power supply connection. Connect an external power supply's positive voltage source to $V_{DD}$ and the supply's ground source to GND header pins respectively.              |
| $HPV_{DD}$ and GND7         | Headphone power supply connection. Connect an external power supply's positive voltage source to $HPV_{DD}$ and the supply's ground source to GND7 header pins respectively. |
| INM+/INL1 and INM-/INR1     | These header pins provide a connection to a mono differential or stereo left and right single-ended input.                                                                   |
| INL2 and INR2               | These header pins provide a connection to stereo left and right single-ended input.                                                                                          |
| EP+ and EP-                 | These header pins provide a connection to the input of the earpiece bypass switch.                                                                                           |
| LSOUT- and LSOUT+           | These header pins provide a connection to Class D loudspeaker outputs. Apply a load greater than 4Ω. A low pass filter may be required for measurements.                     |
| HPL and HPR                 | These header pins provide a connection to headphone outputs. Apply a load greater than 16Ω.                                                                                  |
| J1                          | J1 provides a USB connection to control the LM49153.                                                                                                                         |
| JU1                         | Stereo headphone jack                                                                                                                                                        |

## Power Supply Sequencing

The LM49153 uses two power supply voltages,  $V_{DD}$  for the Class D and  $HPV_{DD}$  for the Headphones. If using two separate power supplies, apply  $V_{DD}$  first before applying  $HPV_{DD}$  to ensure proper operation.

## I<sup>2</sup>C Interface GUI Software

The LM49153 demo board has the I<sup>2</sup>C signal generation microcontroller integrated and will generate the address byte and the data byte when used with the LM49153 GUI software (see [Figure 27](#)).

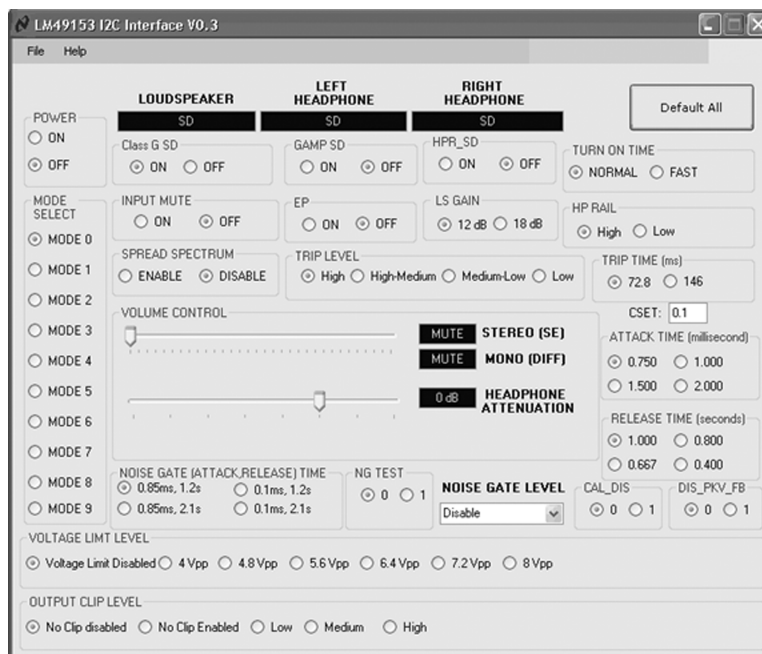


**Figure 27. GUI Software**

## Software Installation Instructions

1. Unzip the LM49153 setup.zip file to a specified folder.
2. Run "LM49153 setup.msi" from the specified folder. If prompted to install Microsoft framework 2.0, please proceed to do so, internet connection may be required)
3. The LM49153 Control Software installation will begin.

## Bill Of Materials

| Item | Ref Designator                                                                                                                                                                     | Part Description                   | Manufacturer      | Part Number        | Value                                       | Footprint | Qty |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|-------------------|--------------------|---------------------------------------------|-----------|-----|
| 1    | PCB                                                                                                                                                                                | LM49153EVAL PCB                    | Texas Instruments | 551600453-001 RevA |                                             |           | 1   |
| 2    | U1                                                                                                                                                                                 | LM49153TMEVAL IC                   | Texas instruments | LM49153TM          |                                             |           | 1   |
| 3    | U2                                                                                                                                                                                 | C8051F320                          | Silicon Labs      | C8051F320          |                                             | LQFP-32   | 1   |
| 4    | U3                                                                                                                                                                                 | LP5900                             | Texas instruments | LP5900TL-1.8       |                                             | uSMD-4    | 1   |
| 5    | U4                                                                                                                                                                                 | LP38691-ADJ                        | Texas instruments | LP38691SD-ADJ      |                                             | LLP-6     |     |
| 6    | C1, C4, C6, C7, C13                                                                                                                                                                | Ceramic Capacitor                  | Panasonic         | ECJ-1VB1A225K      | 2.2uF                                       | 603       | 7   |
| 7    | C5                                                                                                                                                                                 | Tantalum capacitor                 | AVX               | TPSB106K016R0800   | 10uF                                        | B Case    | 1   |
| 8    | C9, C10                                                                                                                                                                            | Ceramic Capacitor                  | Taiyo Yuden       | EMK316B7105KF-T    | 1uF                                         | 1206      | 2   |
| 9    | C11, C12                                                                                                                                                                           | Ceramic Capacitor                  | Panasonic         | ECJ-3VB1C224K      | 0.22uF                                      | 1206      | 2   |
| 10   | C14, C15                                                                                                                                                                           | Ceramic Capacitor                  | Taiyo Yuden       | JMK107BJ106MA-T    | 10uF                                        | 603       | 2   |
| 11   | C16, C17                                                                                                                                                                           | Ceramic Capacitor                  | Kemet             | C0603C474K4RACTU   | 0.47uF                                      | 603       | 2   |
| 12   | C3, C18, C20                                                                                                                                                                       | Ceramic Capacitor                  | Kemet             | C0603C104J3RACTU   | 0.1uF                                       | 603       | 2   |
| 13   | C2, C8, C19, C21                                                                                                                                                                   | Ceramic Capacitor                  | Taiyo Yuden       | LMK107BJ475KA-T    | 4.7uF                                       | 603       | 2   |
| 14   | J1                                                                                                                                                                                 | Mini USB B Type                    | Hirose            | UX60-MB-5ST        |                                             |           | 1   |
| 15   | JU1                                                                                                                                                                                | 5-pole Headphone Jack              | Switch Craft      | 35RAPC4BH3         |                                             |           | 1   |
| 16   | L1, L2                                                                                                                                                                             | FERRITE                            | Murata            | BLM21PG300SN1D     | FERRITE<br>CHIP 30<br>OHM<br>3000MA<br>0805 | 805       | 2   |
| 17   | R1, R2                                                                                                                                                                             | 0603 Resistor                      | Panasonic         | ERJ-3EKF10R0V      | 10ohm                                       | 603       | 2   |
| 18   | R4, R5, R8, R9                                                                                                                                                                     | 0603 Resistor                      | Vishay/Dale       |                    |                                             | 603       | 4   |
| 19   | R6                                                                                                                                                                                 | 0603 Resistor                      | Vishay/Dale       |                    |                                             | 603       | 1   |
| 20   | R7                                                                                                                                                                                 | 0603 Resistor                      | Vishay/Dale       |                    |                                             | 603       | 1   |
| 21   | EP+, EP-, EPOUT+,<br>EPOUT-, GND, GND1,<br>GND2, GND3, GND4,<br>GND5, GND6, GND7,<br>GND8, HPL, HPR,<br>HPVDD, INL2,<br>INM+/INL1, INM-/INR1,<br>INR2, VDD, LSOUT+,<br>LSOUT-, JU3 | 2-pin 100 mil Jumper               | AMP               | 87220-2            |                                             |           | 24  |
| 22   | JU2, JU4, JU5                                                                                                                                                                      | CONN HEADR BRKWAY.<br>10003POS STR | TYCO              | 9-146285-0-03      |                                             |           |     |
| 23   | R3                                                                                                                                                                                 |                                    |                   |                    |                                             |           |     |

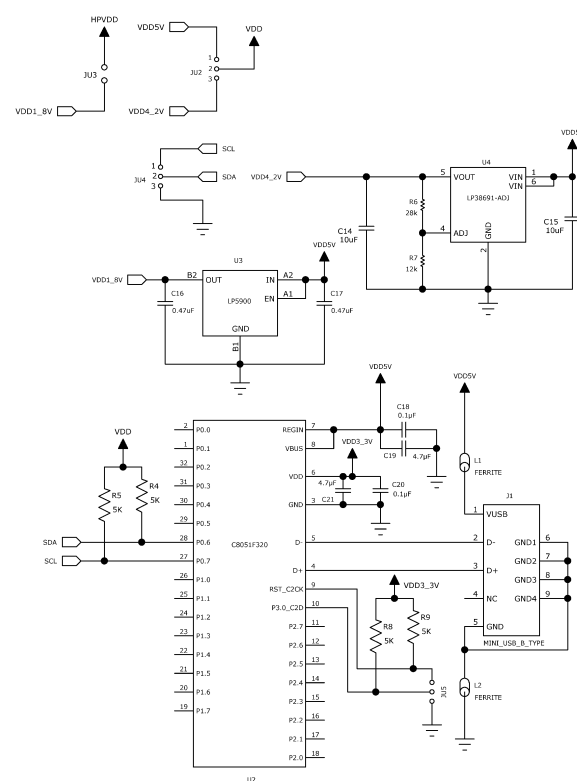

## Demo Board Layout

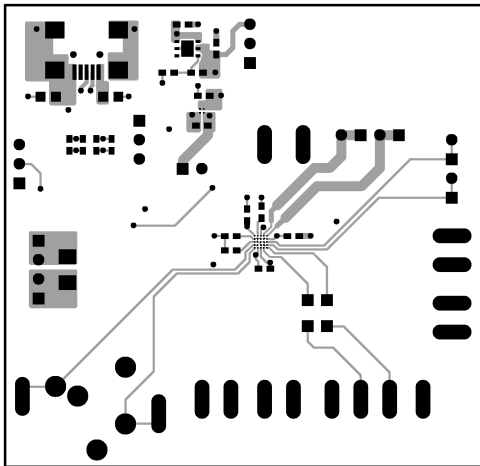


Figure 28. Top Layer

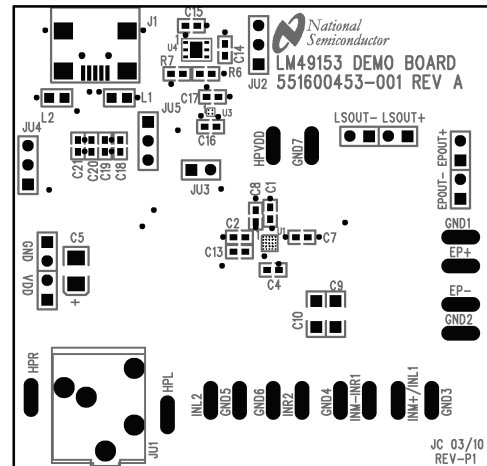


Figure 29. Top Silkscreen

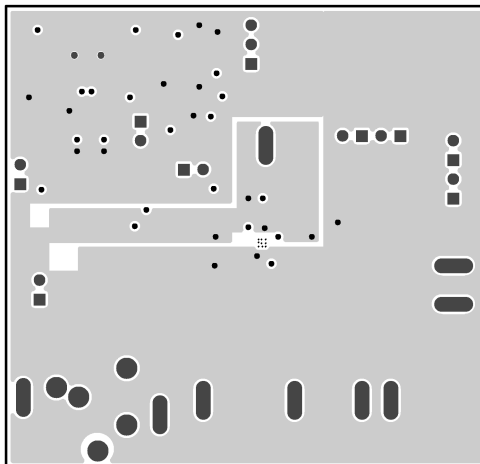


Figure 30. Layer 2

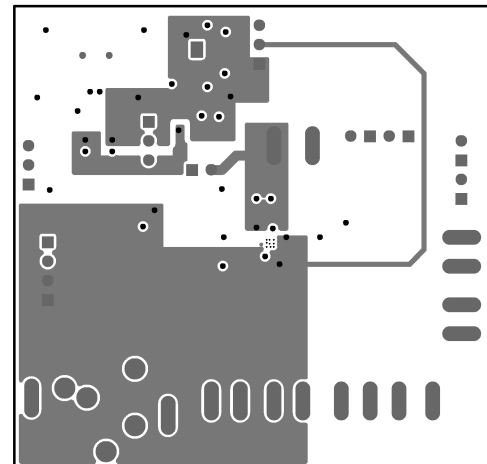


Figure 31. Layer 3

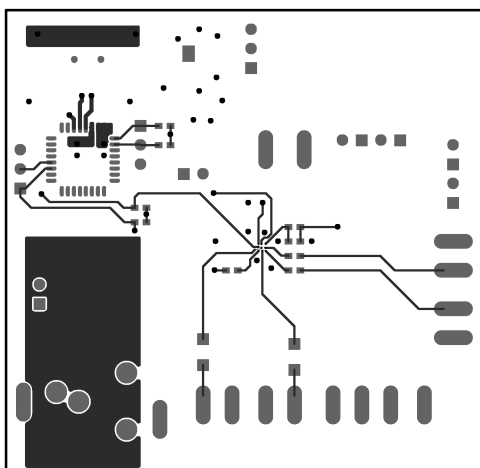


Figure 32. Bottom Layer

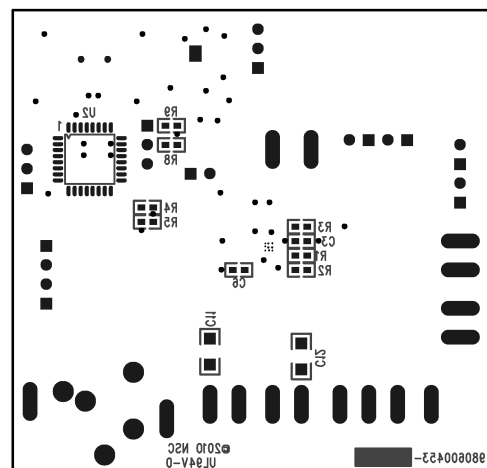


Figure 33. Bottom Silkscreen

## Revision History

| Rev  | Date     | Description                                                  |
|------|----------|--------------------------------------------------------------|
| 1.0  | 12/02/10 | Initial WEB released.                                        |
| 1.01 | 12/08/10 | Text edits.                                                  |
| 1.02 | 03/31/11 | Changed the Typical value on Xtalk from 68 to 78 (EC table). |
| 1.03 | 04/01/11 | Changed the Typical value on Xtalk from 78 to 80 (EC table). |
| C    | 05/03/13 | Changed layout of National Data Sheet to TI format.          |

## PACKAGING INFORMATION

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|---------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">LM49153TME/NOPB</a> | Active        | Production           | DSBGA (YFQ)   25 | 250   SMALL T&R       | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | GO1                 |
| LM49153TME/NOPB.A               | Active        | Production           | DSBGA (YFQ)   25 | 250   SMALL T&R       | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | GO1                 |
| <a href="#">LM49153TMX/NOPB</a> | Active        | Production           | DSBGA (YFQ)   25 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | GO1                 |
| LM49153TMX/NOPB.A               | Active        | Production           | DSBGA (YFQ)   25 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | GO1                 |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM49153TME/NOPB | DSBGA        | YFQ             | 25   | 250  | 178.0              | 8.4                | 2.39    | 2.64    | 0.76    | 4.0     | 8.0    | Q1            |
| LM49153TMX/NOPB | DSBGA        | YFQ             | 25   | 3000 | 178.0              | 8.4                | 2.39    | 2.64    | 0.76    | 4.0     | 8.0    | Q1            |


## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LM49153TME/NOPB | DSBGA        | YFQ             | 25   | 250  | 208.0       | 191.0      | 35.0        |
| LM49153TMX/NOPB | DSBGA        | YFQ             | 25   | 3000 | 208.0       | 191.0      | 35.0        |

YFQ0025

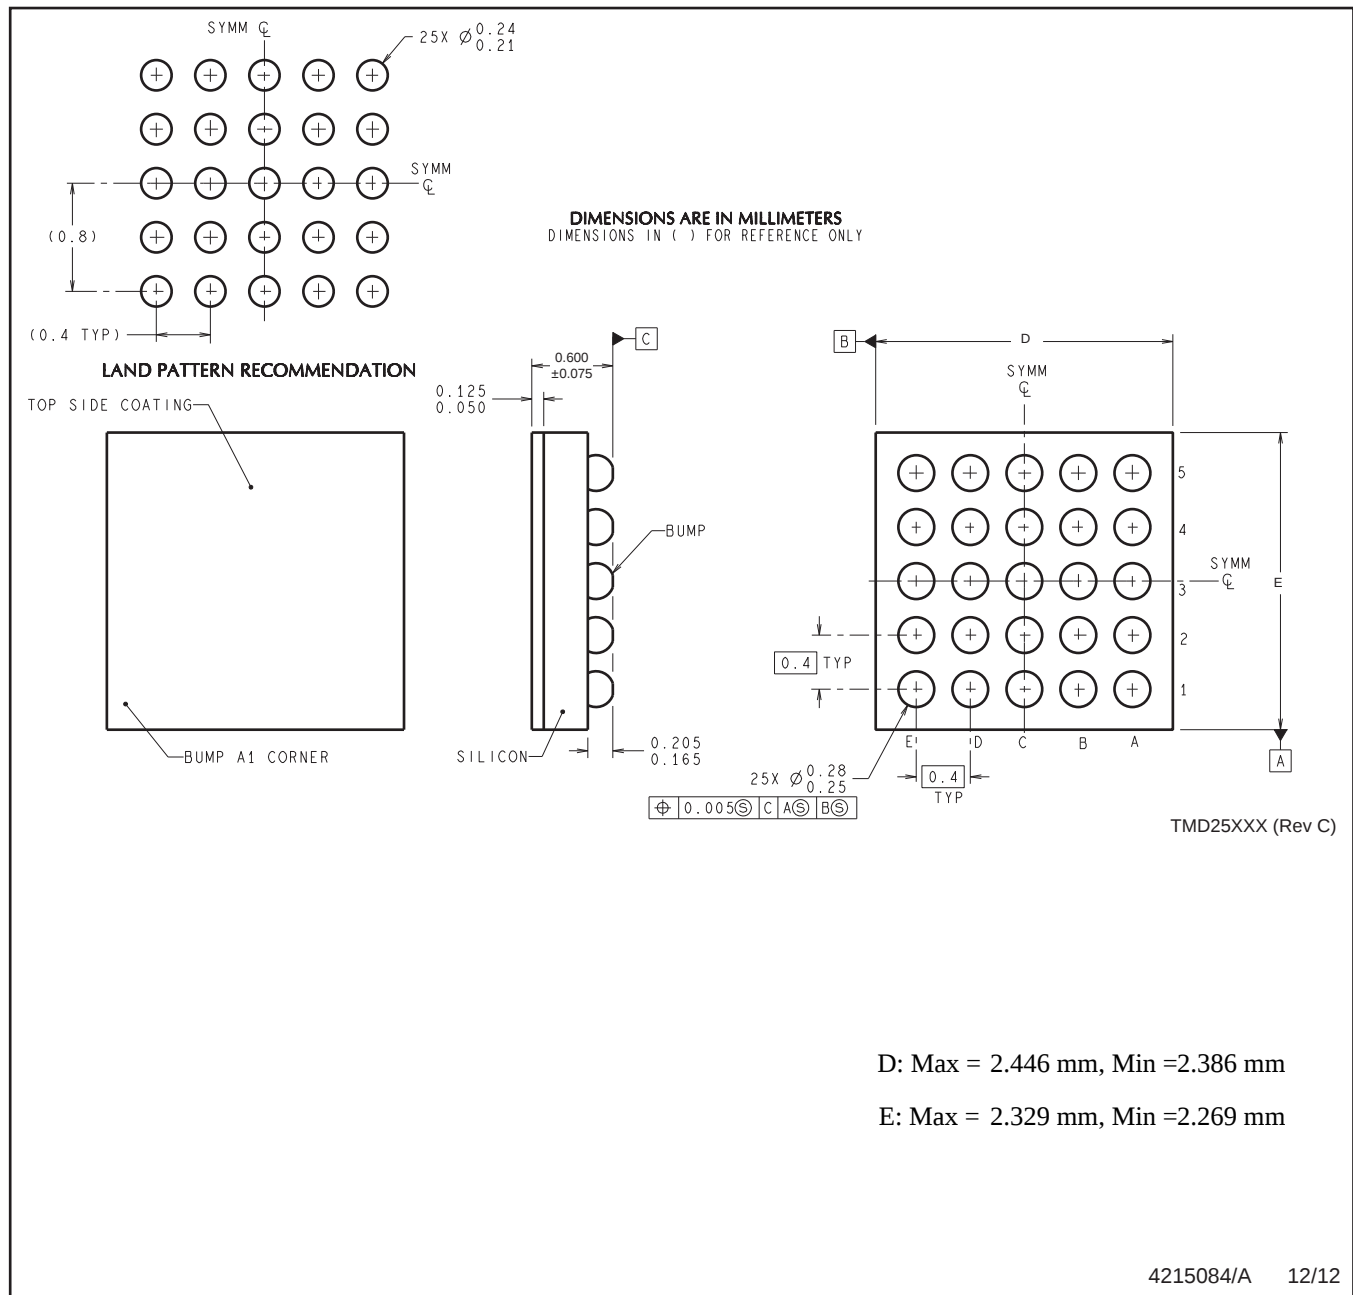

NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.  
B. This drawing is subject to change without notice.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated