TPA2025D1 2-W Constant Output Power Class-D Audio Amplifier With Class-G Boost Converter and Battery Tracking AGC

1 Features

- Built-In Enhanced Battery Tracking Automatic Gain Control (AGC)
  - Limits Battery Current Consumption
- 1.9 W into 8-Ω Load from 3.6-V Supply (1% THD+N)
- Integrated Adaptive Boost Converter
  - Increases Efficiency at Low Output Power
- Low Quiescent Current of 2 mA From 3.6 V
- Thermal and Short-Circuit Protection With Auto Recovery
- 20-dB Fixed Gain
- Similar Performance to TPA2015D1
- Available in 1.53-mm × 1.982-mm, 0.5-mm Pitch 12-Ball WCSP Package

2 Applications

- Cell Phones
- PDA, GPS
- Portable Electronics and Speakers

3 Description

The TPA2025D1 is a high efficiency Class-D audio power amplifier with battery tracking AGC technology and an integrated Class-G boost converter that enhances efficiency at low output power. It drives up to 1.9 W into an 8-Ω speaker (1% THD+N). With 85% typical efficiency, the TPA2025D1 helps extend battery life when playing audio.

The built-in boost converter generates a 5.75-V supply voltage for the Class-D amplifier. This provides a louder audio output than a stand-alone amplifier directly connected to the battery. The battery tracking AGC adjusts the Class-D gain to limit battery current at lower battery voltage.

The TPA2025D1 has an integrated low-pass filter to improve the RF rejection and reduce DAC out-of-band noise, increasing the signal-to-noise ratio (SNR).

The TPA2025D1 is available in a space saving 1.53 mm × 1.982 mm, 0.5 mm pitch DSBGA package (YZG).

Device Information(1)

PART NUMBER	PACKAGE	BODY SIZE (NOM)
TPA2025D1	DSBGA (12)	1.53 mm x 1.982 mm

(1) For all available packages, see the orderable addendum at the end of the datasheet.

4 Simplified Application Diagram

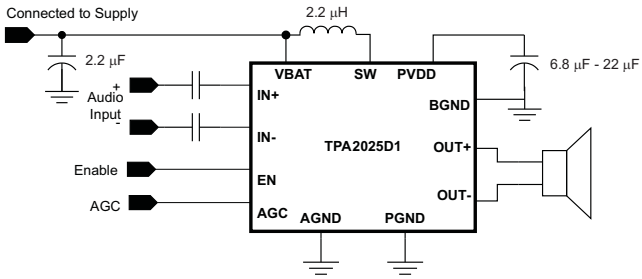

Battery Tracking Auto Gain Control

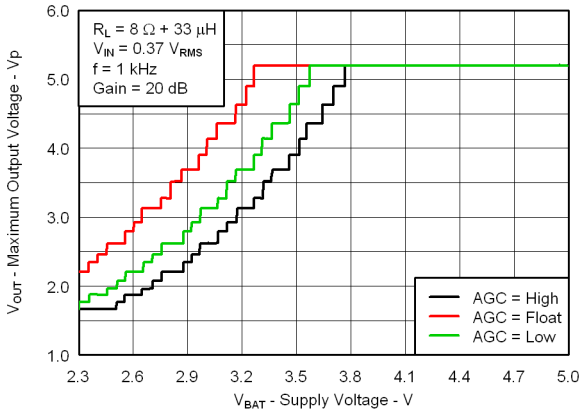

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

Table of Contents

1 **Features** ... 1
2 **Applications** ... 1
3 **Description** ... 1
4 **Simplified Application Diagram** ... 1
5 **Revision History** ... 2
6 **Device Comparison Table** ... 3
7 **Pin Configuration and Functions** ... 3
8 **Specifications** ... 4
8.1 Absolute Maximum Ratings ... 4
8.2 ESD Ratings ... 4
8.3 Recommended Operating Conditions ... 4
8.4 Thermal Information ... 4
8.5 Electrical Characteristics ... 5
8.6 Operating Characteristics ... 5
8.7 Typical Characteristics ... 7
9 **Parameter Measurement Information** ... 11
10 **Detailed Description** ... 11
10.1 Overview ... 11
10.2 Functional Block Diagram ... 11
10.3 Feature Description ... 12
10.4 Device Functional Modes ... 13
11 **Application and Implementation** ... 15
11.1 Application Information ... 15
11.2 Typical Application ... 15
12 **Power Supply Recommendations** ... 20
12.1 Power Supply Decoupling Capacitors ... 20
13 **Layout** ... 20
13.1 Layout Guidelines ... 20
13.2 Layout Example ... 22
14 **Device and Documentation Support** ... 23
14.1 Trademarks ... 23
14.2 Electrostatic Discharge Caution ... 23
14.3 Glossary ... 23
15 **Mechanical, Packaging, and Orderable Information** ... 23

5 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision A (February 2012) to Revision B	Page
• Added *Pin Configuration and Functions* section, *ESD Ratings* table, *Feature Description* section, *Device Functional Modes*, *Application and Implementation* section, *Power Supply Recommendations* section, *Layout* section, *Device and Documentation Support* section, and *Mechanical, Packaging, and Orderable Information* section	1

Changes from Original (August 2011) to Revision A	Page
• Changed Operating quiescent current TYP value from "3.5" to "2.0" for VBAT = 3.6 V; and, TYP value from "4" to 2.5" for VBAT = 5.2 V	5
• Changed Shutdown quiescent current MAX value from "3" to "1"	5
• Changed from "110 ms" to "1.6 seconds" in the SHORT CIRCUIT AUTO-RECOVERY description.	13
• Changed from "within 200 ms" to "1.6 seconds" in the Speaker Load Limitation description	18

Copyright © 2011–2014, Texas Instruments Incorporated

6 Device Comparison Table

DEVICE NAME	DESCRIPTION
TPA2025D1	2 W Constant Output Power Class-D Audio Amplifier with Class-G Boost Converter and Battery Tracking AGC

7 Pin Configuration and Functions

12-PIN
YZG PACKAGE
(TOP VIEW)



Pin Functions

PIN		INPUT/ OUTPUT/ POWER (I/O/P)	DESCRIPTION
NAME	WCSP		
PVDD	A1	O	Boost converter output and Class-D power stage supply voltage.
SW	A2	I	Boost converter switch input; connect boost inductor between VBAT and SW.
BGND	A3	P	Boost converter power ground.
OUT+	B1	O	Positive audio output.
AGC	B2	I	AGC inflection point select. Connect to VDD, GND or Float. Voltage at AGC pin is only read at device power-up. A power cycle is required to change inflection points.
VBAT	B3	P	Supply voltage.
OUT–	C1	O	Negative audio output.
EN	C2	I	Device enable; set to logic high to enable.
IN+	C3	I	Positive audio input.
PGND	D1	P	Class-D power ground.
AGND	D2	P	Analog ground.
IN–	D3	I	Negative audio input.

Copyright © 2011–2014, Texas Instruments Incorporated

8 Specifications

8.1 Absolute Maximum Ratings

Over operating free–air temperature range, T_A= 25°C (unless otherwise noted)(1)

		MIN	MAX	UNIT
Supply voltage	VBAT	–0.3	6	V
Input Voltage, V_I	IN+, IN–	–0.3	VBAT + 0.3	V
Output continuous total power dissipation		See *Thermal Information*		
Operating free-air temperature range, T_A		–40	85	°C
Operating junction temperature range, T_J		–40	150	°C
Minimum load resistance		3.2		Ω
Maximum input voltage swing	EN = 0 V		2	V_{RMS}
Storage temperature range, T_{stg}		–65	150	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute–maximum–rated conditions for extended periods may affect device reliability.

8.2 ESD Ratings

		VALUE	UNIT
$V_{(ESD)}$ Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001(1)	±2000	V
	Charged-device model (CDM), per JEDEC specification JESD22-C101(2)	±500	
	Machine model (MM)	±100	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

8.3 Recommended Operating Conditions

		MIN	MAX	UNIT
	Supply voltage, VBAT	2.5	5.2	V
V_{IH}	High–level input voltage, EN	1.3		V
V_{IL}	Low–level input voltage, EN		0.6	V
T_A	Operating free-air temperature	–40	85	°C
T_J	Operating junction temperature	–40	150	°C

8.4 Thermal Information

THERMAL METRIC(1)		TPA2025D1 YZG 12 PINS	UNITS
$R_{\theta JA}$	Junction-to-ambient thermal resistance	97.3	°C/W
$R_{\theta JC(top)}$	Junction-to-case(top) thermal resistance	36.7	
$R_{\theta JB}$	Junction-to-board thermal resistance	55.9	
ψ_{JT}	Junction-to-top characterization parameter	13.9	
ψ_{JB}	Junction-to-board characterization parameter	49.5	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, SPRA953.

Copyright © 2011–2014, Texas Instruments Incorporated

8.5 Electrical Characteristics

VBAT = 3.6 V, T_A = 25°C, R_L = 8 Ω + 33 µH (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
VBAT supply voltage range		2.5		5.2	V
Class-D supply voltage range	EN = VBAT, boost converter active		5.75		V
	Boost converter disabled (in bypass mode)	2.5		5.2	
Supply under voltage shutdown			2.2		V
Operating quiescent current	EN = VBAT = 3.6 V		2.0	5	mA
	EN = VBAT = 5.2V		2.5	6	
Shutdown quiescent current	VBAT = 2.5 V to 5.2 V, EN = GND		0.2	1	µA
Input common-mode voltage range	IN+, IN–	0.6		1.3	V
Start-up time			6	10	ms

8.6 Operating Characteristics

VBAT= 3.6 V, EN = VBAT, AGC = GND, T_A = 25°C, R_L = 8 Ω + 33 µH (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
BOOST CONVERTER						
PVDD	Boost converter output voltage range	I_{BOOST} = 0 mA	5.4	5.75	6.4	V
		I_{BOOST} = 700 mA		5.6		V
I_L	Boost converter input current limit	Power supply current		1800		mA
	Boost converter start-up current limit	Boost converter starts up from full shutdown		600		
		Boost converter wakes up from auto-pass through mode		1000		
f_{BOOST}	Boost converter frequency			1.2		MHz
CLASS-D AMPLIFIER						
P_O	Output power	THD = 1%, VBAT = 2.5 V, f = 1 kHz		1440		mW
		THD = 1%, VBAT = 3.0 V, f = 1 kHz		1750		
		THD = 1%, VBAT = 3.6 V, f = 1 kHz		1900		
		THD = 1%, VBAT = 2.5 V, f = 1 kHz, R_L = 4 Ω + 33 µH		1460		
		THD = 1%, VBAT = 3.0 V, f = 1 kHz, R_L = 4 Ω + 33 µH		1800		
		THD = 1%, VBAT = 3.6 V, f = 1 kHz, R_L = 4 Ω + 33 µH		2280		
V_O	Peak output voltage	THD = 1%, VBAT = 3.6 V, f = 1 kHz, 6 dB crest factor sine burst, no clipping		5.45		V
A_V	Voltage gain		19.5	20	20.5	dB
$\|V_{OOS}\|$	Output offset voltage			2	10	mV
	Short-circuit protection threshold current			2		A
R_{IN}	Input impedance (per input pin)	A_V = 20 dB		24		kΩ
	Input impedance in shutdown (per input pin)	EN = 0 V		1300		
Z_O	Output impedance in shutdown			2		kΩ
	Boost converter auto-pass through threshold	Class-D output voltage threshold when boost converter automatically turns on		2		V_{PK}
$f_{CLASS-D}$	Class-D switching frequency		275	300	325	kHz
η	Class-D and boost combined efficiency	P_O = 1 W, VBAT = 3.6 V		82%		

Copyright © 2011–2014, Texas Instruments Incorporated

Operating Characteristics (continued)

VBAT= 3.6 V, EN = VBAT, AGC = GND, T_A = 25°C, R_L = 8 Ω + 33 µH (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
E_N	Noise output voltage	A-weighted		49		μV_{RMS}
		Unweighted		65		
SNR	Signal-to-noise ratio	1.7 W, R_L = 8 Ω + 33 µH. A-weighted		97		dB
		1.7 W, R_L = 8 Ω + 33 µH. Unweighted		95		
		2 W, R_L = 4 Ω + 33 µH. A-weighted		95		
		2 W, R_L = 4 Ω + 33 µH. Unweighted		93		
THD+N	Total harmonic distortion plus noise(1)	P_O = 100 mW, f = 1 kHz		0.06%		
		P_O = 500 mW, f = 1 kHz		0.07%		
		P_O = 1.7 W, f = 1 kHz, R_L = 8 Ω + 33 µH		0.07%		
		P_O = 2 W, f = 1 kHz, R_L = 4 Ω + 33 µH		0.15%		
	THD+N added to other audio signal connected at amplifier input during shutdown			0.02%		
AC PSRR	AC-Power supply ripple rejection (output referred)	200 mV_{PP} square ripple, V_{BAT} = 3.8 V, f = 217 Hz		62.5		dB
		200 mV_{PP} square ripple, V_{BAT} = 3.8 V, f = 1 kHz		62.5		
AC CMRR	AC-Common mode rejection ratio (output referred)	200 mV_{PP} square ripple, V_{BAT} = 3.8 V, f = 217 Hz		71		dB
		200 mV_{PP} square ripple, V_{BAT} = 3.8 V, f = 1 kHz		71		
AUTOMATIC GAIN CONTROL						
	AGC maximum attenuation			10		dB
	AGC attenuation resolution			0.5		dB
	AGC attack time (gain decrease)			20		µs/dB
	AGC release time (gain increase)			1.6		s/dB
	Gain vs VBAT slope	VBAT < inflection point		7.5		dB/V
	AGC inflection point (Note: AGC pin voltage is read only at device power-up. A device power cycle is required to change AGC inflection points.)	AGC = Float		3.25		V
		AGC = GND		3.55		
		AGC = VBAT		3.75		

(1) A-weighted

Copyright © 2011–2014, Texas Instruments Incorporated

8.7 Typical Characteristics

VBAT = 3.6 V, C_I = 1 µF, C_{BOOST} = 22 µF, L_{BOOST} = 2.2 µH, EN = VBAT, and Load = 8 Ω + 33 µH, no ferrite bead unless otherwise specified.

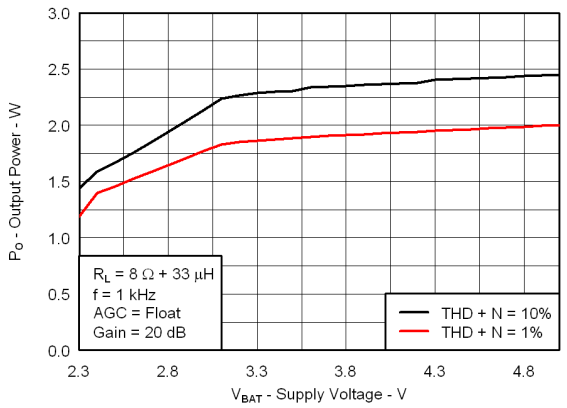

Figure 1. Output Power vs Supply Voltage

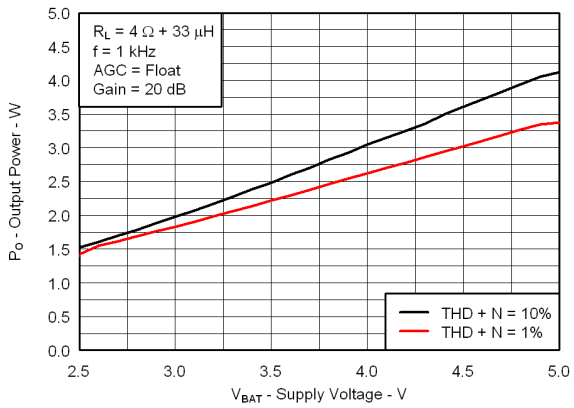

Figure 2. Output Power vs Supply Voltage

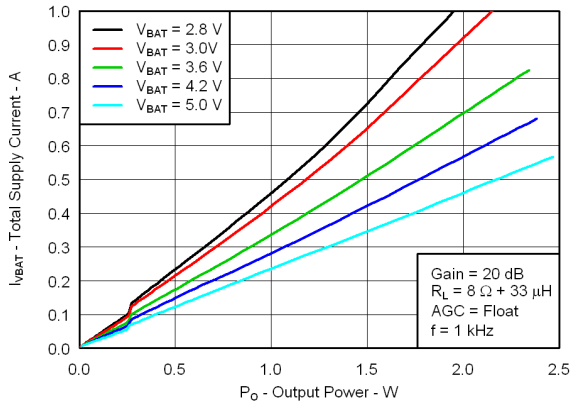

Figure 3. Total Supply Current vs Output Power

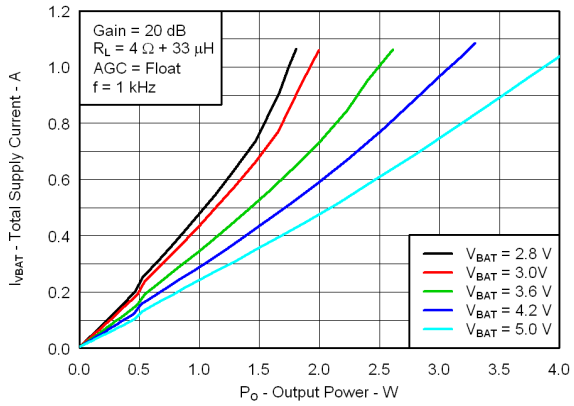

Figure 4. Total Supply Current vs Output Power

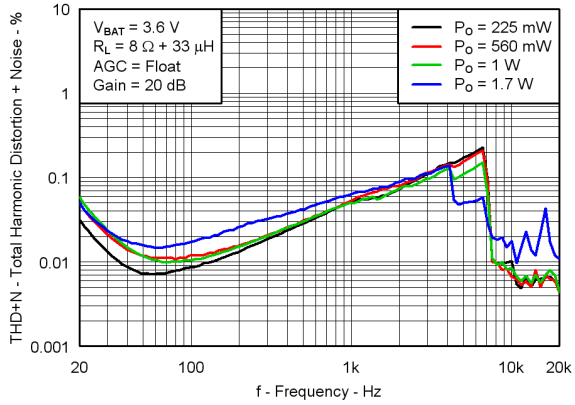

Figure 5. Total Harmonic Distortion + Noise vs Frequency

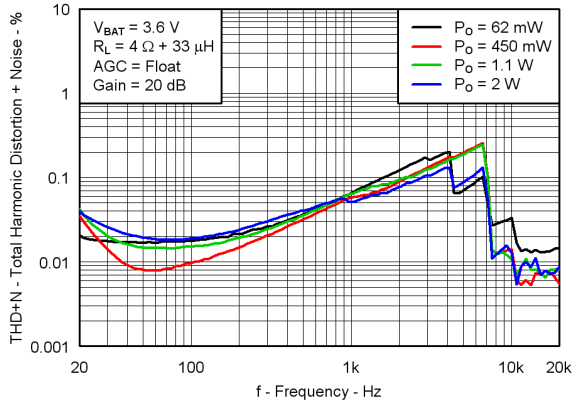

Figure 6. Total Harmonic Distortion + Noise vs Frequency

Typical Characteristics (continued)

VBAT = 3.6 V, C_I = 1 µF, C_{BOOST} = 22 µF, L_{BOOST} = 2.2 µH, EN = VBAT, and Load = 8 Ω + 33 µH, no ferrite bead unless otherwise specified.

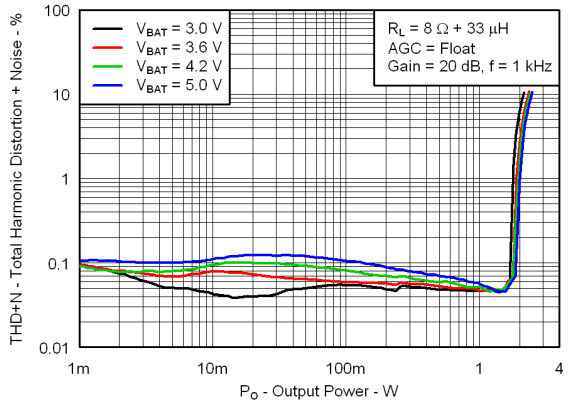

Figure 7. Total Harmonic Distortion + Noise vs Output Power

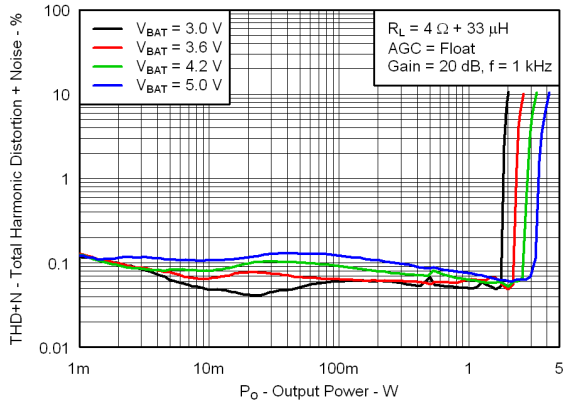

Figure 8. Total Harmonic Distortion + Noise vs Output Power

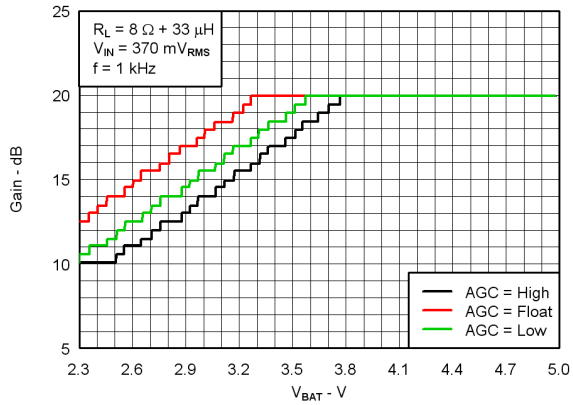

Figure 9. Gain vs Supply Voltage

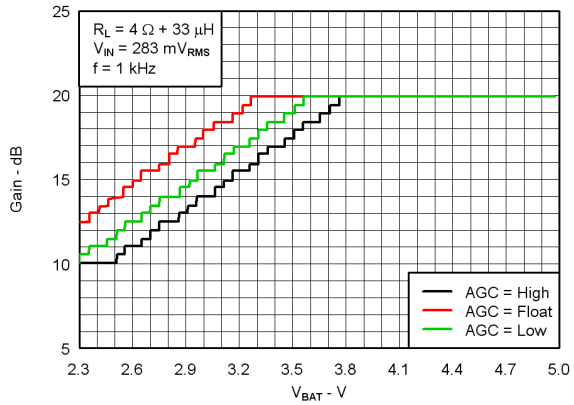

Figure 10. Gain vs Supply Voltage

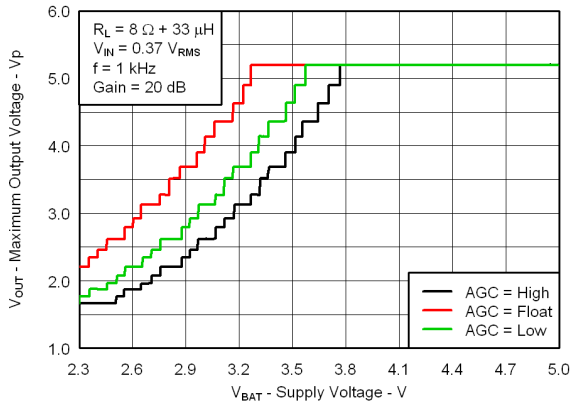

Figure 11. Maximum Peak Output Voltage vs Supply Voltage

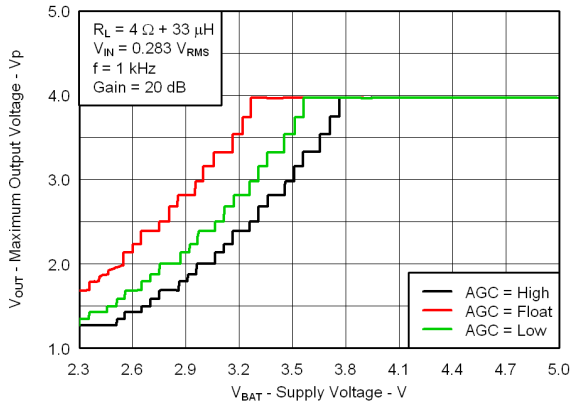

Figure 12. Maximum Peak Output Voltage vs Supply Voltage

Copyright © 2011–2014, Texas Instruments Incorporated

Typical Characteristics (continued)

VBAT = 3.6 V, C_I = 1 µF, C_{BOOST} = 22 µF, L_{BOOST} = 2.2 µH, EN = VBAT, and Load = 8 Ω + 33 µH, no ferrite bead unless otherwise specified.

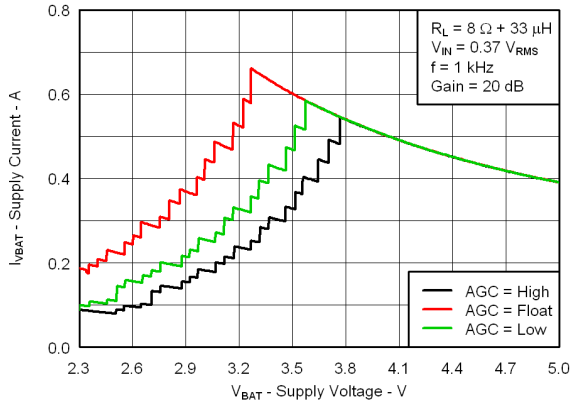

Figure 13. Supply Current vs Supply Voltage

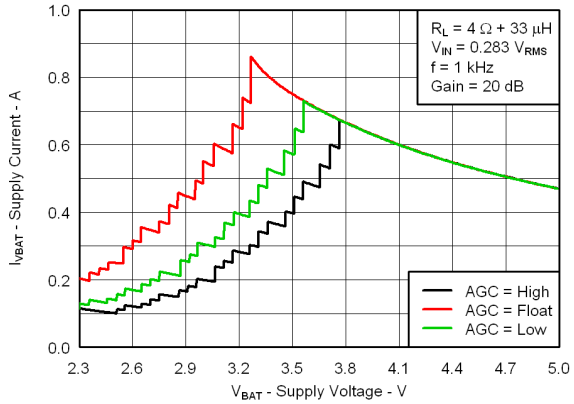

Figure 14. Supply Current vs Supply Voltage

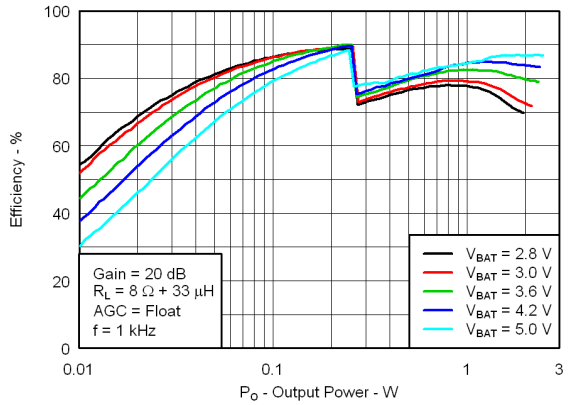

Figure 15. Total Efficiency vs Output Power

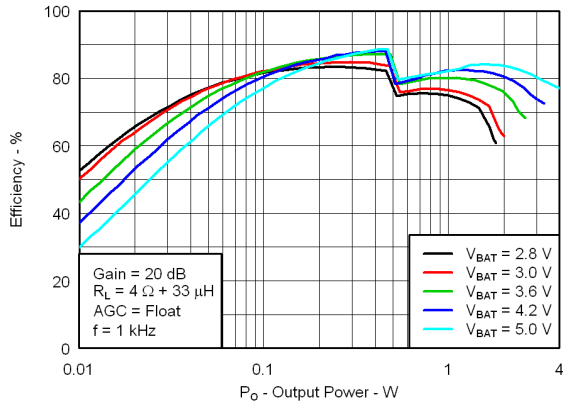

Figure 16. Total Efficiency vs Output Power

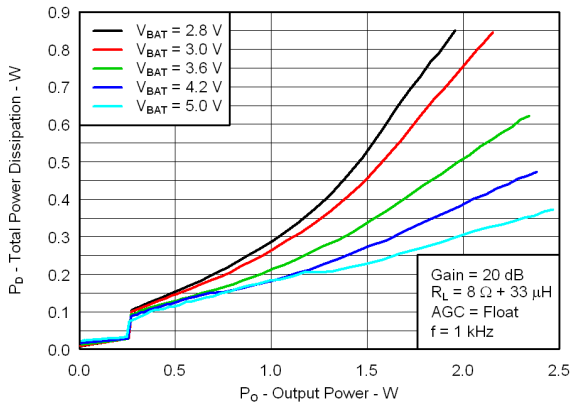

Figure 17. Total Power Dissipation vs Output Power

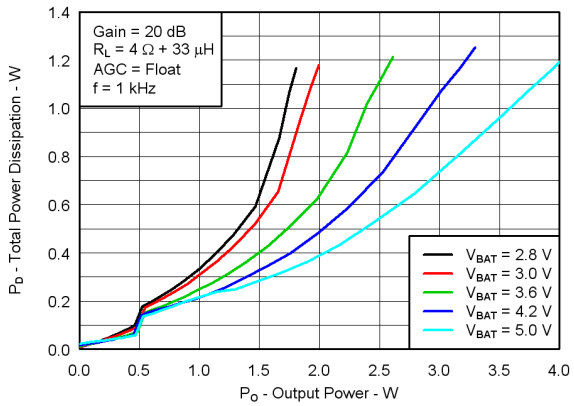

Figure 18. Total Power Dissipation vs Output Power

Typical Characteristics (continued)

VBAT = 3.6 V, C_I = 1 µF, C_{BOOST} = 22 µF, L_{BOOST} = 2.2 µH, EN = VBAT, and Load = 8 Ω + 33 µH, no ferrite bead unless otherwise specified.

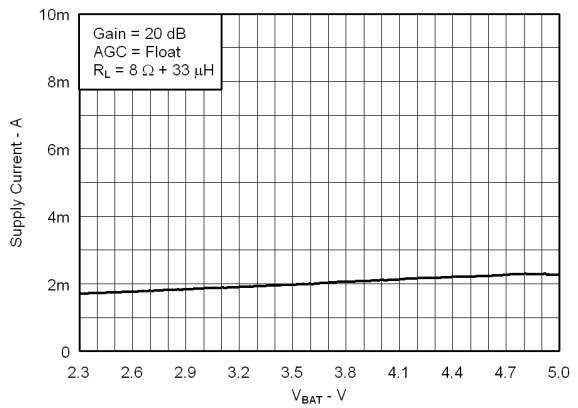

Figure 19. Quiescent Supply Current vs Supply Voltage

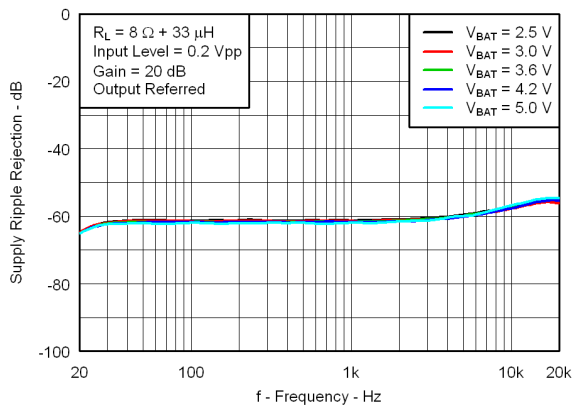

Figure 20. Supply Ripple Rejection vs Frequency

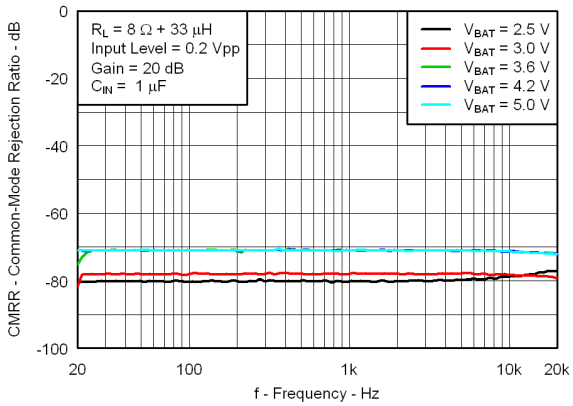

Figure 21. Common Mode Rejection Ratio vs Frequency

Copyright © 2011–2014, Texas Instruments Incorporated

9 Parameter Measurement Information

All parameters are measured according to the conditions described in the *Specifications* section.

Many audio analyzers will not give the correct readings on a Class-D amplifier without additional filtering, even if they have an internal low-pass filter. A RC 30kHz low-pass filter (100-Ω, 47n-F) is implemented to reduce the remaining noise frequencies from the PWM carrier signal. This filter was used on each output for the data sheet graphs.

10 Detailed Description

10.1 Overview

The TPA2025D1 is a constant output, high efficiency Class-D audio amplifier with battery tracking AGC technology and an integrated Class-G boost converter. This features give the device a great performance and enhances efficiency at low output power. The TPA2025D1 can drive up to 1.9 W into an 8-Ω speaker (1% THD+N).

The built-in boost converter operates from a battery supply voltage and generates a higher output voltage PVDD at 5.75 V that drives the supply voltage of the Class-D amplifier. This provides a louder audio output than a stand-alone amplifier directly connected to the battery.

The battery tracking AGC adjusts the Class-D gain to limit battery current at lower battery voltage. This lets the device to extend the battery life while playing audio, typically with 85% efficiency. When the battery voltage is below a certain threshold voltage, The TPA2025D1 lowers the audio loudness. The threshold is selectable with an external pin.

The TPA2025D1 has an integrated low-pass filter to improve the RF rejection and reduce DAC out-of-band noise, increasing the signal-to-noise ratio (SNR). The features included in this device allow it to be used in a wide range of portable applications.

10.2 Functional Block Diagram

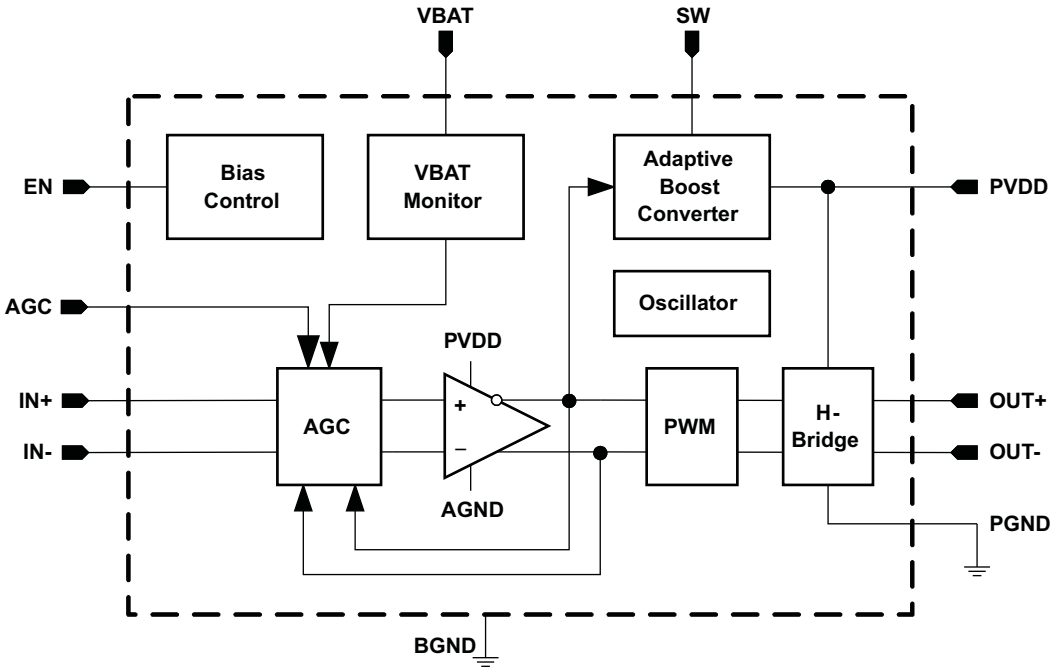

10.3 Feature Description

10.3.1 Battery Tracking Automatic Gain Control (AGC)

TPA2025D1 monitors the battery voltage and automatically reduces the gain when the battery voltage is below a certain threshold voltage, which is defined as inflection point. Although battery tracking AGC lowers the audio loudness, it prevents high battery current at end-of-charge battery voltage. The inflection point is selectable at AGC pin. When the amplifier is turned on, the gain is set according to battery voltage and selected inflection point.

Figure 22 shows the plot of gain as a function of battery supply voltage. The default slope is 7.5 dB/V. When battery voltage drops below inflection point by 1 V, AGC reduces the gain by 7.5 dB. The TPA2025D1 can only operate at one slope.

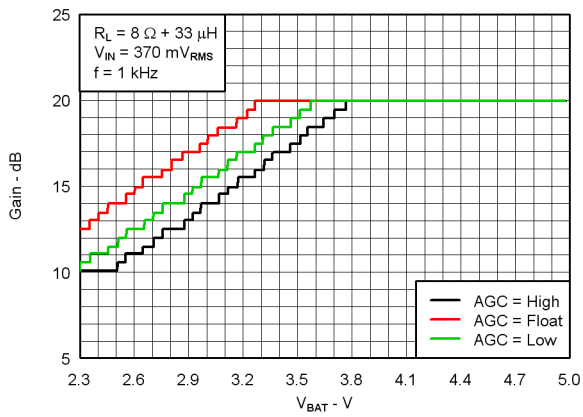

Figure 22. Gain vs Battery voltage

10.3.2 Boost Converter Auto Pass Through (APT)

The TPA2025D1 consists of an adaptive boost converter and a Class-D amplifier. The boost converter operates from the supply voltage, VBAT, and generates a higher output voltage PVDD at 5.75 V. PVDD drives the supply voltage of the Class-D amplifier. This improves loudness over non-boosted solutions. The boost converter has a “Pass Through” mode in which it turns off automatically and PVDD is directly connected to VBAT through an internal bypass switch.

The boost converter is adaptive and operates between pass through mode and boost mode depending on the output audio signal amplitude. When the audio output amplitude exceeds the “auto pass through” (APT) threshold, the boost converter is activated automatically and goes to boost mode. The transition time from normal mode to boost mode is less than 3 ms. TPA2025D1’s APT threshold is fixed at 2 Vpk. When the audio output signal is below APT threshold, the boost converter is deactivated and goes to pass through mode. The adaptive boost converter maximizes system efficiency in lower audio output level.

The battery AGC is independent of APT threshold. The AGC operates in both boost-active and APT modes.

Figure 23 shows how the adaptive boost converter behaves with a typical audio signal.

Copyright © 2011–2014, Texas Instruments Incorporated

Feature Description (continued)

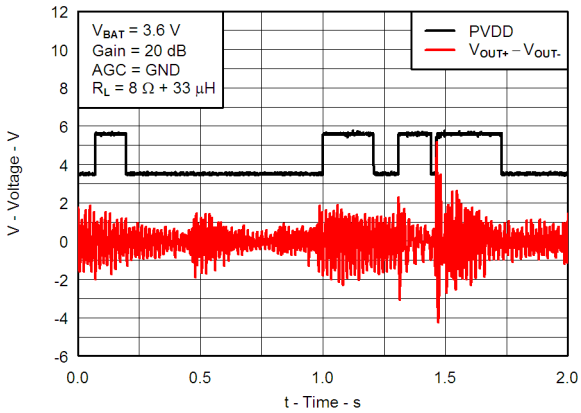

Figure 23. Adaptive Boost Converter with Typical Music Playback

10.3.3 Short Circuit Auto-Recovery

When a short circuit event happens, the TPA2025D1 goes to low duty cycle mode and tries to reactivate itself every 1.6 seconds. This auto-recovery continues until the short circuit event stops. This feature protects the device without affecting its long term reliability.

10.3.4 Thermal Protection

It is important to operate the TPA2025D1 at temperatures lower than its maximum operating temperature. The maximum ambient temperature depends on the heat-sinking ability of the PCB system. Given θ_{JA} of 97.3°C/W, the maximum allowable junction temperature of 150°C, and the internal dissipation of 0.5 W for 1.9 W, 8 Ω load, 3.6 V supply, the maximum ambient temperature is calculated as:

$$T_{A,MAX} = T_{J,MAX} - \theta_{JA} P_D = 150°C - (97.3°C/W \times 0.5W) = 101.4°C$$

The calculated maximum ambient temperature is 101.4°C at maximum power dissipation at 3.6 V supply and 8 Ω load. The TPA2025D1 is designed with thermal protection that turns the device off when the junction temperature surpasses 150°C to prevent damage to the IC.

10.3.5 Operation with DACS and Codecs

Large noise voltages can be present at the output of ΔΣ DACs and CODECs, just above the audio frequency (e.g: 80 kHz with a 300 mV_{P-P}). This out-of-band noise is due to the noise shaping of the delta-sigma modulator in the DAC. Some Class-D amplifiers have higher output noise when used in combination with these DACs and CODECs. This is because out-of-band noise from the CODEC/DAC mixes with the Class-D switching frequencies in the audio amplifier input stage. The TPA2025D1 has a built-in low-pass filter with cutoff frequency at 55 kHz that reduces the out-of-band noise and RF noise, filtering out-of-band frequencies that could degrade in-band noise performance. This built-in filter also prevents AGC errors due to out-of-band noise. The TPA2025D1 AGC calculates gain based on input signal amplitude only. If driving the TPA2025D1 input with 4th-order or higher ΔΣ DACs or CODECs, add an R-C low pass filter at each of the audio inputs (IN+ and IN-) of the TPA2025D1 to ensure best performance. The recommended resistor value is 100 Ω and the capacitor value of 47 nF.

10.4 Device Functional Modes

10.4.1 Operation Below AGC Threshold

When the battery power supply voltage is below a certain threshold voltage, the TPA2025D1 starts reducing the gain automatically. This AGC threshold is selected by external AGC pin at 3.25 V, 3.55 V and 3.75 V for FLOAT, LOW and HIGH levels respectively.

Figure 24 shows the operation of AGC in time domain.

Device Functional Modes (continued)

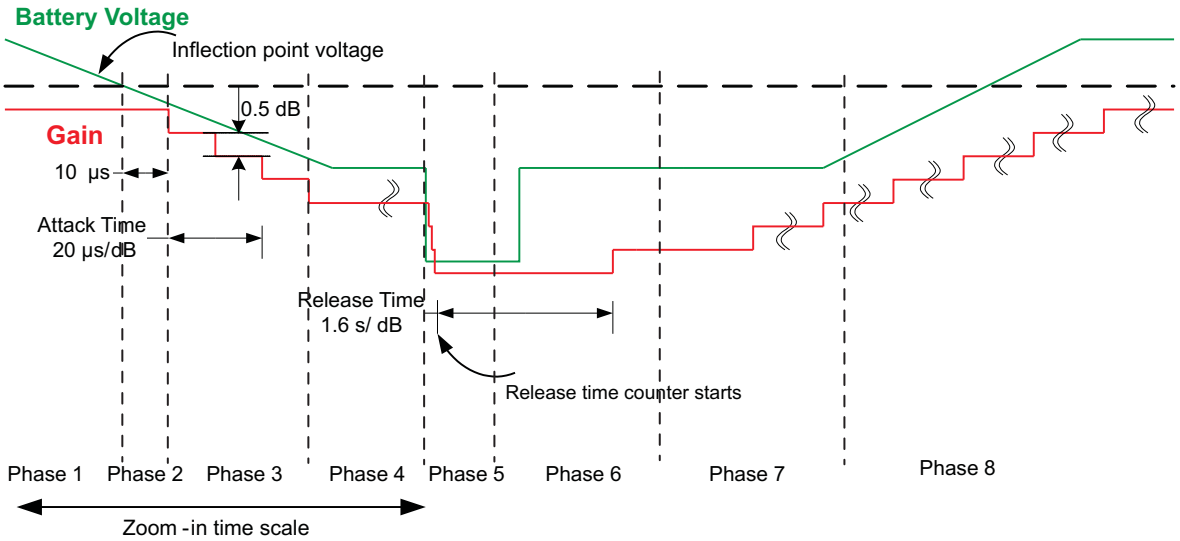

Figure 24. Relationship Between Supply Voltage and Gain in Time Domain

Phase 1	Battery discharging normally; supply voltage is above inflection point; audio gain remains at 20 dB.
Phase 2	Battery voltage decreases below inflection point. AGC responds in 10 µs and reduces gain by one step (0.5 dB)
Phase 3	Battery voltage continues to decrease. AGC continues to reduce gain. The rate of gain decrease is defined as attack time. TPA2025D1's attack time is 20 µs/dB.
Phase 4	Battery voltage is constant. AGC stops reducing gain.
Phase 5	Battery voltage decreases suddenly. AGC reduces gain multiple steps. (time scale from this phase is longer) Release time counter resets every end of attack event.
Phase 6	Release time has elapsed. Battery voltage returns to previous level. AGC increases gain by one step. TPA2025D1's release time is 1.6 s/dB
Phase 7	Battery voltage remains constant. AGC continues to increase gain until it reaches steady state gain value defined in Figure 22.
Phase 8	Battery voltage is recharged to above inflection point. AGC continues to increase gain until it reaches 20 dB.

10.4.2 Shutdown Mode

The TPA2025D1 can be put in shutdown mode when asserting EN pin to a logic LOW. While in shutdown mode, the device output stage is turned off and the current consumption is very low. The device exits shutdown mode when a HIGH logic level is applied to EN pin.

Copyright © 2011–2014, Texas Instruments Incorporated

11 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

11.1 Application Information

The TPA2025D1 is a Class D amplifier with integrated automatic gain control and boost converter. This device is capable of drive up to 1.9W to 8-Ω Speaker (1% THD+N). TPA2025D1 starts operating when setting EN pin to HIGH level. The device enters in shutdown mode when asserting EN to LOW level. AGC pin connection sets the threshold where the device will start reducing the output amplitude. The selectable threshold voltages are specified in the *Operating Characteristics* section. In order to measure the TPA2025D1 output with an analyzer, a 30KHz Low pass filter should be implemented.

11.2 Typical Application

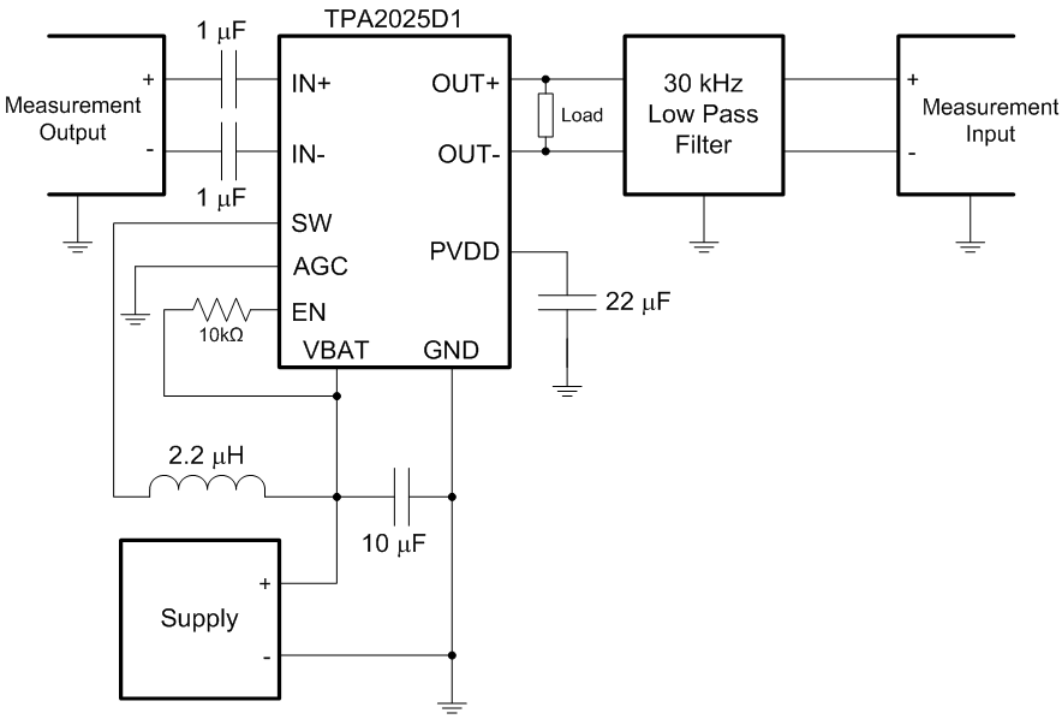

(1) The 1-µF input capacitors on IN+ and IN- were shorted for input common-mode voltage measurements.

(2) A 33-µH inductor was placed in series with the load resistor to emulate a small speaker for efficiency measurements.

(3) The 30-kHz low-pass filter is required even if the analyzer has an internal low-pass filter. An R-C low-pass filter (100 Ω, 47 nF) is used on each output for the data sheet graphs.

Figure 25. Typical Application Schematic

Typical Application (continued)

11.2.1 Design Requirements

For this design example, use the parameters listed in Table 1.

Table 1. Design Parameters

PARAMETER	VALUE
Supply voltage range	2.5 V - 5.2 V
Input voltage range	0 V - 5 V
Peak output voltage	5.45 V
Max output current	1.8 A

11.2.2 Detailed Design Procedure

11.2.2.1 Boost Converter Component Section

The critical external components are summarized in the following table:

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Boost converter inductor	At 30% rated DC bias current of the inductor	1.5	2.2	4.7	µH
Boost converter input capacitor		4.7		10	µF
Boost converter output capacitor	Working capacitance biased at boost output voltage, if 4.7µH inductor is chosen, then minimum capacitance is 10 µF	4.7		22	µF

11.2.2.1.1 Inductor Equations

Inductor current rating is determined by the requirements of the load. The inductance is determined by two factors: the minimum value required for stability and the maximum ripple current permitted in the application. Use Equation 1 to determine the required current rating. Equation 1 shows the approximate relationship between the average inductor current, I_L, to the load current, load voltage, and input voltage (I_{PVDD}, PVDD, and VBAT, respectively). Insert I_{PVDD}, PVDD, and VBAT into Equation 1 and solve for I_L. The inductor must maintain at least 90% of its initial inductance value at this current.

$$I_L = I_{PVDD} \times \left(\frac{PVDD}{VBAT \times 0.8}\right) \tag{1}$$

Ripple current, ΔI_L, is peak-to-peak variation in inductor current. Smaller ripple current reduces core losses in the inductor and reduces the potential for EMI. Use Equation 2 to determine the value of the inductor, L. Equation 2 shows the relationship between inductance L, VBAT, PVDD, the switching frequency, f_{BOOST}, and ΔI_L. Insert the maximum acceptable ripple current into Equation 2 and solve for L.

$$L = \frac{VBAT \times (PVDD - VBAT)}{\Delta I_L \times f_{BOOST} \times PVDD} \tag{2}$$

ΔI_L is inversely proportional to L. Minimize ΔI_L as much as is necessary for a specific application. Increase the inductance to reduce the ripple current. Do not use greater than 4.7 µH, as this prevents the boost converter from responding to fast output current changes properly. If using above 3.3 µH, then use at least 10 µF capacitance on PVDD to ensure boost converter stability.

The typical inductor value range for the TPA2025D1 is 2.2 µH to 3.3 µH. Select an inductor with less than 0.5 Ω dc resistance, DCR. Higher DCR reduces total efficiency due to an increase in voltage drop across the inductor.

Copyright © 2011–2014, Texas Instruments Incorporated

Table 2. Sample Inductors

L (µH)	SUPPLIER	COMPONENT CODE	SIZE (LxWxH mm)	DCR TYP (mΩ)	I_{SAT} MAX (A)	C RANGE
2.2	Toko	1239AS-H-2R2N=P2	2.5 x 2.0 x 1.2	96	2.3	4.7 - 22 µF / 16 V 6.8 - 22 µV / 10 V
2.2	Coilcraft	XFL4020-222MEC	4.0 x 4.0 x 2.15	22	3.5	
3.3	Toko	1239AS-H-3R3N=P2	2.5 x 2.0 x 1.2	160	2.0	10 - 22 µF / 10 V
3.3	Coilcraft	XFL4020-332MEC	4.0 x 4.0 x 2.15	35	2.8	

11.2.2.1.2 Boost Converter Capacitor Selection

The value of the boost capacitor is determined by the minimum value of working capacitance required for stability and the maximum voltage ripple allowed on PVDD in the application. Working capacitance refers to the available capacitance after derating the capacitor value for DC bias, temperature, and aging. Do not use any component with a working capacitance less than 4.7 µF. This corresponds to a 4.7 µF/16 V capacitor, or a 6.8 µF/10 V capacitor.

Do not use above 22 µF capacitance as it will reduce the boost converter response time to large output current transients.

Equation 3 shows the relationship between the boost capacitance, C, to load current, load voltage, ripple voltage, input voltage, and switching frequency (I_{PVDD}, PVDD, ΔV, VBAT, and f_{BOOST} respectively).

Insert the maximum allowed ripple voltage into Equation 3 and solve for C. The 1.5 multiplier accounts for capacitance loss due to applied dc voltage and temperature for X5R and X7R ceramic capacitors.

$$C = 1.5 \times \frac{I_{PVDD} \times (PVDD - VBAT)}{\Delta V \times f_{BOOST} \times PVDD} \tag{3}$$

11.2.2.1.3 Boost Terms

The following is a list of terms and definitions used in the boost equations.

C	Minimum boost capacitance required for a given ripple voltage on PVDD.
L	Boost inductor
f_{BOOST}	Switching frequency of the boost converter.
I_{PVDD}	Current pulled by the Class-D amplifier from the boost converter.
I_L	Average current through the boost inductor.
PVDD	Supply voltage for the Class-D amplifier. (Voltage generated by the boost converter output)
VBAT	Supply voltage to the IC.
ΔI_L	Ripple current through the inductor.
ΔV	Ripple voltage on PVDD.

11.2.2.2 Input Capacitors

Input audio DC decoupling capacitors are recommended. The input audio DC decoupling capacitors prevents the AGC from changing the gain due to audio DAC output offset. The input capacitors and TPA2025D1 input impedance form a high-pass filter with the corner frequency, f_C, determined in Equation 4.

Any mismatch in capacitance between the two inputs will cause a mismatch in the corner frequencies. Severe mismatch may also cause turn-on pop noise. Choose capacitors with a tolerance of ±10% or better.

$$f_c = \frac{1}{(2 \times \pi \times R_I C_I)} \tag{4}$$

11.2.2.3 Speaker Load Limitation

Speakers are non-linear loads with varying impedance (magnitude and phase) over the audio frequency. A portion of speaker load current can flow back into the boost converter output via the Class-D output H-bridge high-side device. This is dependent on the speaker's phase change over frequency, and the audio signal amplitude and frequency content. Most portable speakers have limited phase change at the resonant frequency, typically no more than 40 or 50 degrees. To avoid excess flow-back current, use speakers with limited phase change. Otherwise, flow-back current could drive the PVDD voltage above the absolute maximum recommended operational voltage.

Confirm proper operation by connecting the speaker to the TPA2025D1 and driving it at maximum output swing. Observe the PVDD voltage with an oscilloscope. In the unlikely event the PVDD voltage exceeds 6.5 V, add a 6.8 V Zener diode between PVDD and ground to ensure the TPA2025D1 operates properly. The amplifier has thermal overload protection and deactivates if the die temperature exceeds 150°C. It automatically reactivates once die temperature returns below 150°C. Built-in output over-current protection deactivates the amplifier if the speaker load becomes short-circuited. The amplifier automatically restarts 1.6 seconds after the over-current event. Although the TPA2025D1 Class-D output can withstand a short between OUT+ and OUT-, do not connect either output directly to GND, VDD, or VBAT as this could damage the device.

11.2.3 Application Curve

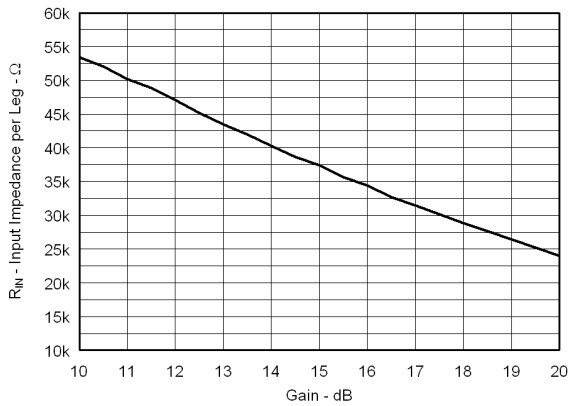

Figure 26. Input Impedance vs Gain

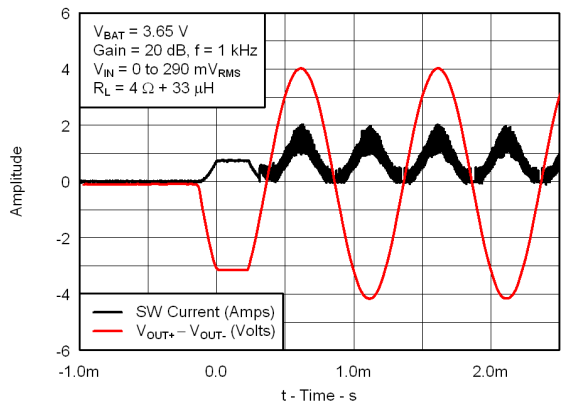

Figure 27. Boost Startup Current vs Time

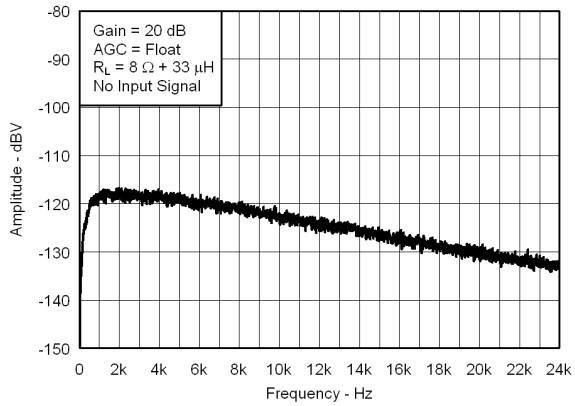

Figure 28. A-Weighted Noise vs Frequency

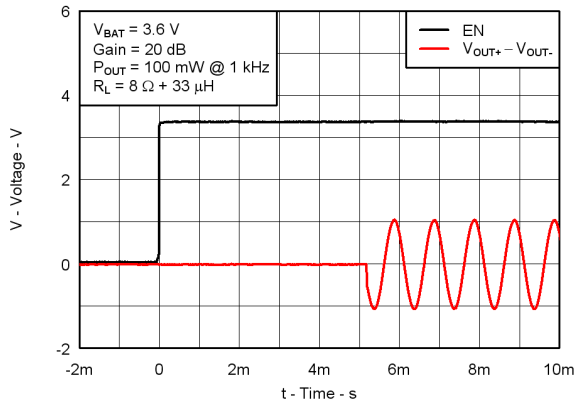

Figure 29. Startup Timing

Copyright © 2011–2014, Texas Instruments Incorporated

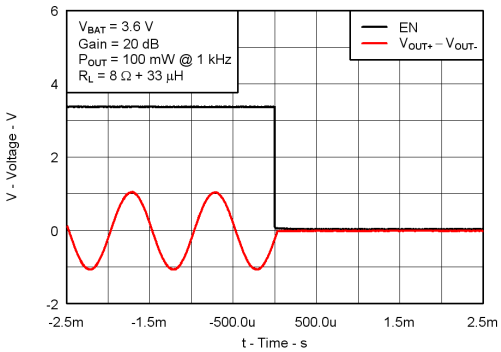

Figure 30. Shutdown Timing

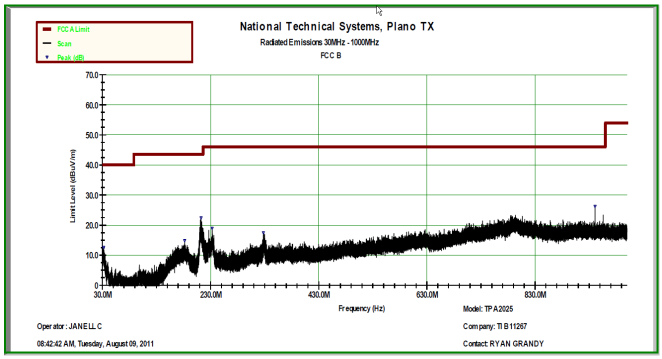

Figure 31. EMC Performance Po = 750 mW with 2 Inch Speaker Cable

12 Power Supply Recommendations

The TPA2025D1 is designed to operate from an input voltage supply range between 2.5-V and 5.2-V. Therefore, the output voltage range of power supply should be within this range and well regulated. The current capability of upper power should not exceed the maximum current limit of the power switch.

12.1 Power Supply Decoupling Capacitors

The TPA2025D1 is a high-performance Class-D audio amplifier that requires adequate power supply decoupling. Adequate power supply decoupling to ensures that the efficiency is high and total harmonic distortion (THD) is low.

Place a low equivalent-series-resistance (ESR) ceramic capacitor, typically 0.1 µF, within 2 mm of the VBAT ball. This choice of capacitor and placement helps with higher frequency transients, spikes, or digital hash on the line. Additionally, placing this decoupling capacitor close to the TPA2025D1 is important, as any parasitic resistance or inductance between the device and the capacitor causes efficiency loss. In addition to the 0.1 µF ceramic capacitor, place a 2.2 µF to 10 µF capacitor on the VBAT supply trace. This larger capacitor acts as a charge reservoir, providing energy faster than the board supply, thus helping to prevent any droop in the supply voltage.

13 Layout

13.1 Layout Guidelines

Decoupling capacitors should be placed as close to the supply voltage pin as possible. For this device a 10-µF high-quality ceramic capacitor is recommended.

Table 3. Land Pattern Dimensions(1) (2) (3) (4)

SOLDER PAD DEFINITIONS	COPPER PAD	SOLDER MASK (5) OPENING	COPPER THICKNESS	STENCIL (6) (7) OPENING	STENCIL THICKNESS
Nonsolder mask defined (NSMD)	275 µm (+0.0, -25 µm)	375 µm (+0.0, -25 µm)	1 oz max (32 µm)	275 µm x 275 µm Sq. (rounded corners)	125 µm thick

(1) Circuit traces from NSMD defined PWB lands should be 75 µm to 100 µm wide in the exposed area inside the solder mask opening. Wider trace widths reduce device stand off and impact reliability.
(2) Best reliability results are achieved when the PWB laminate glass transition temperature is above the operating the range of the intended application.
(3) Recommend solder paste is Type 3 or Type 4.
(4) For a PWB using a Ni/Au surface finish, the gold thickness should be less 0.5 mm to avoid a reduction in thermal fatigue performance.
(5) Solder mask thickness should be less than 20 µm on top of the copper circuit pattern
(6) Best solder stencil performance is achieved using laser cut stencils with electro polishing. Use of chemically etched stencils results in inferior solder paste volume control.
(7) Trace routing away from WCSP device should be balanced in X and Y directions to avoid unintentional component movement due to solder wetting forces.

Copyright © 2011–2014, Texas Instruments Incorporated

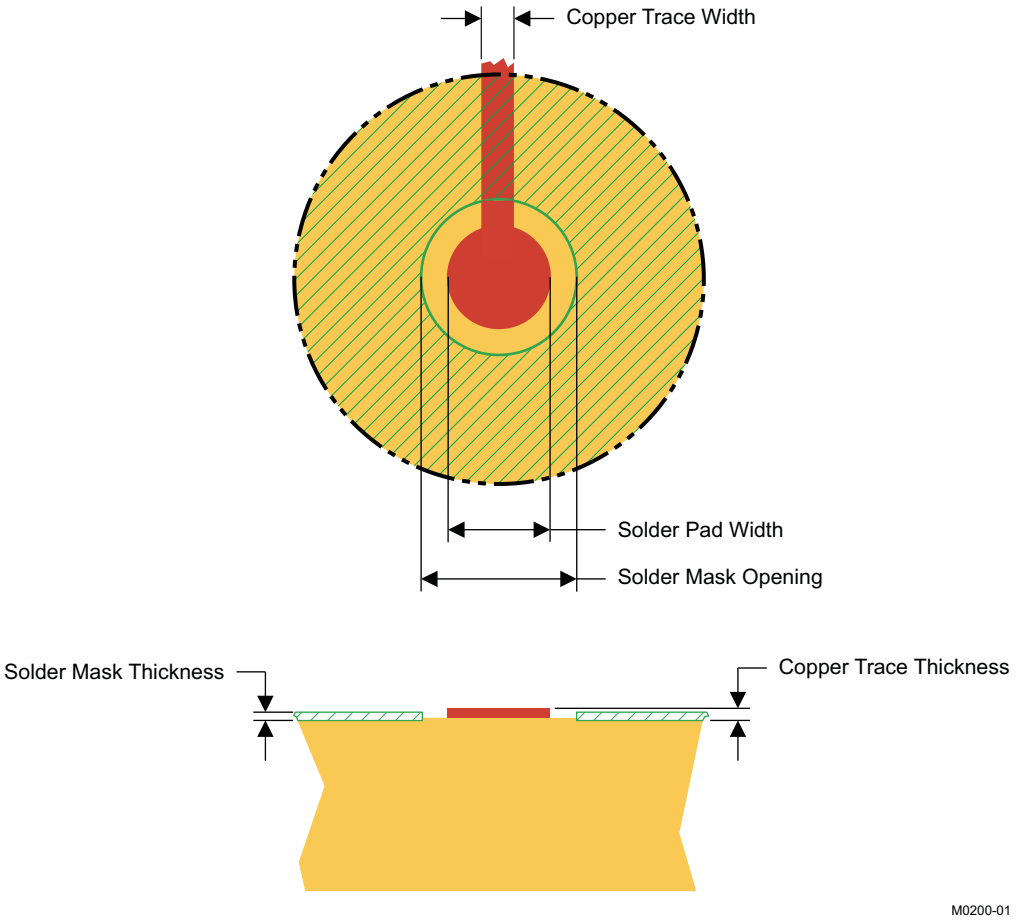

Figure 32. Land Pattern Dimensions

13.2 Layout Example

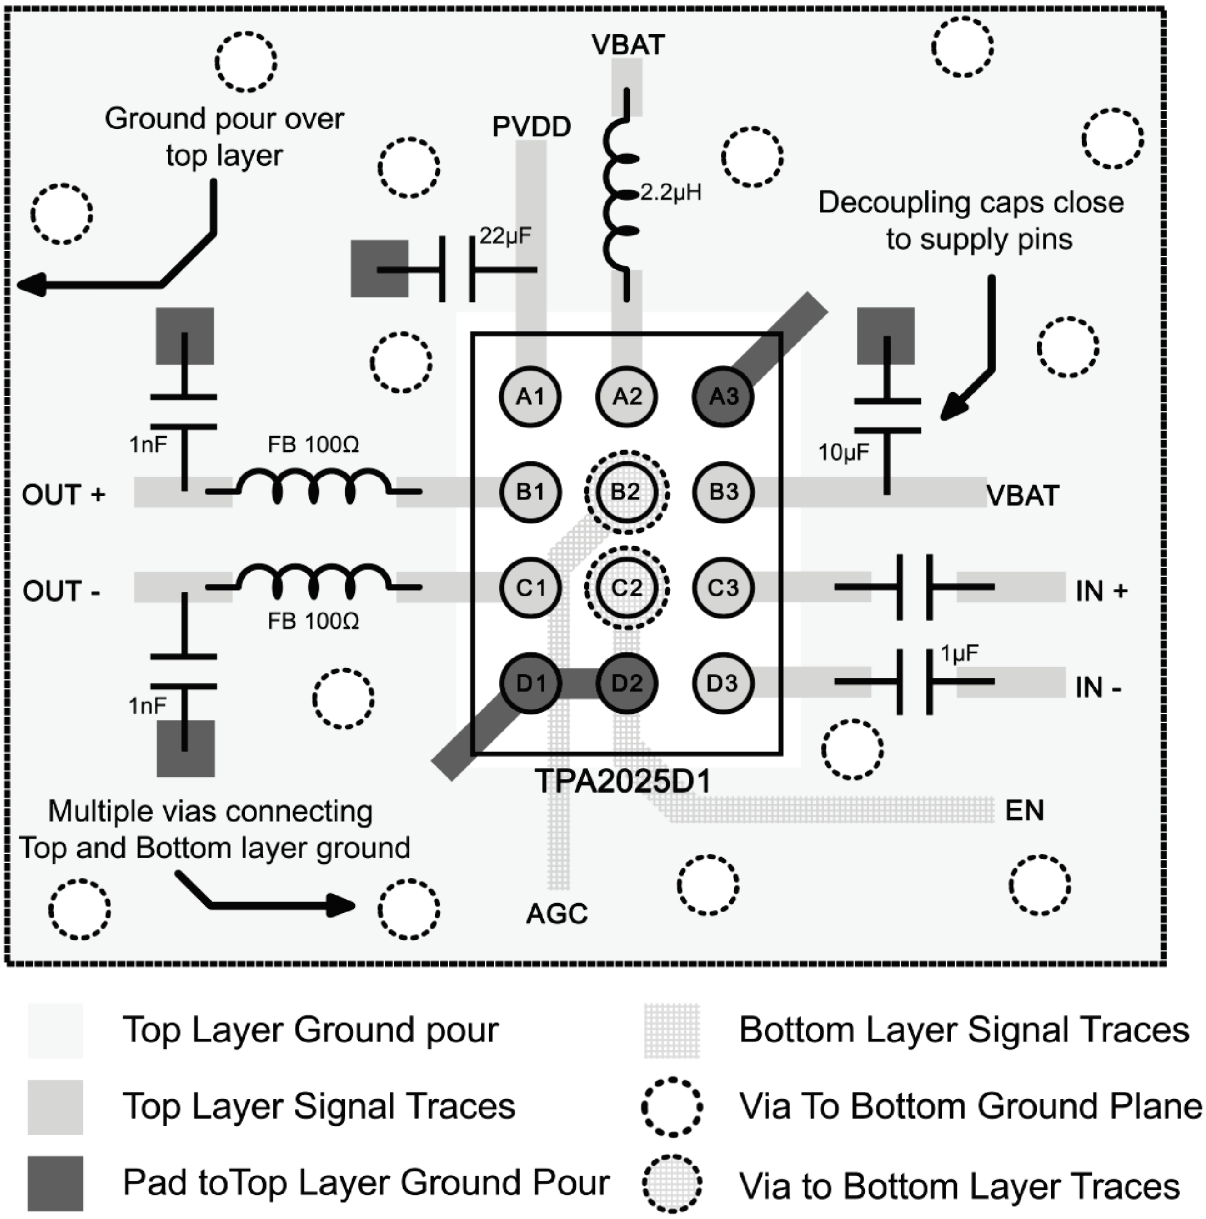

Figure 33. TPA2025D1 Layout Example

Copyright © 2011–2014, Texas Instruments Incorporated

14 Device and Documentation Support

14.1 Trademarks

All trademarks are the property of their respective owners.

14.2 Electrostatic Discharge Caution

These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

14.3 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

15 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPA2025D1YZGR	Active	Production	DSBGA (YZG) | 12	3000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	TPA2025D1
TPA2025D1YZGR.A	Active	Production	DSBGA (YZG) | 12	3000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	TPA2025D1
TPA2025D1YZGT	Active	Production	DSBGA (YZG) | 12	250 | SMALL T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	TPA2025D1
TPA2025D1YZGT.A	Active	Production	DSBGA (YZG) | 12	250 | SMALL T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	TPA2025D1

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

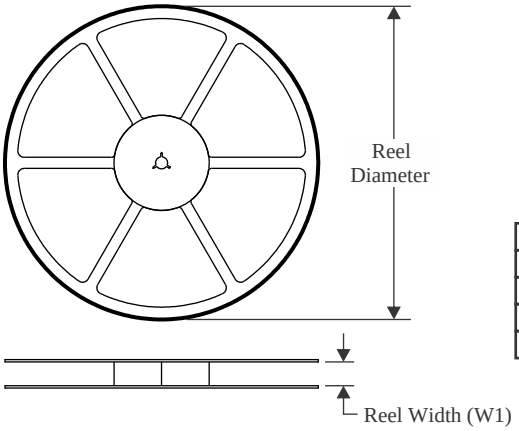

TAPE DIMENSIONS

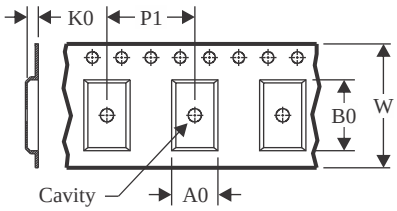

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

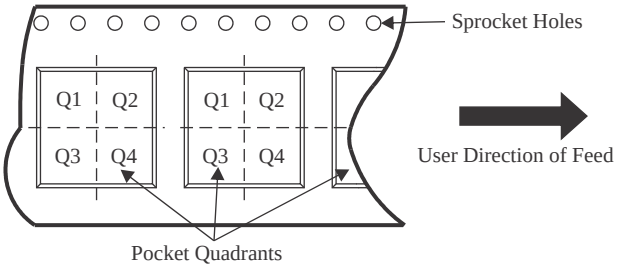

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPA2025D1YZGR	DSBGA	YZG	12	3000	180.0	8.4	1.63	2.08	0.69	4.0	8.0	Q1
TPA2025D1YZGT	DSBGA	YZG	12	250	180.0	8.4	1.63	2.08	0.69	4.0	8.0	Q1

TAPE AND REEL BOX DIMENSIONS

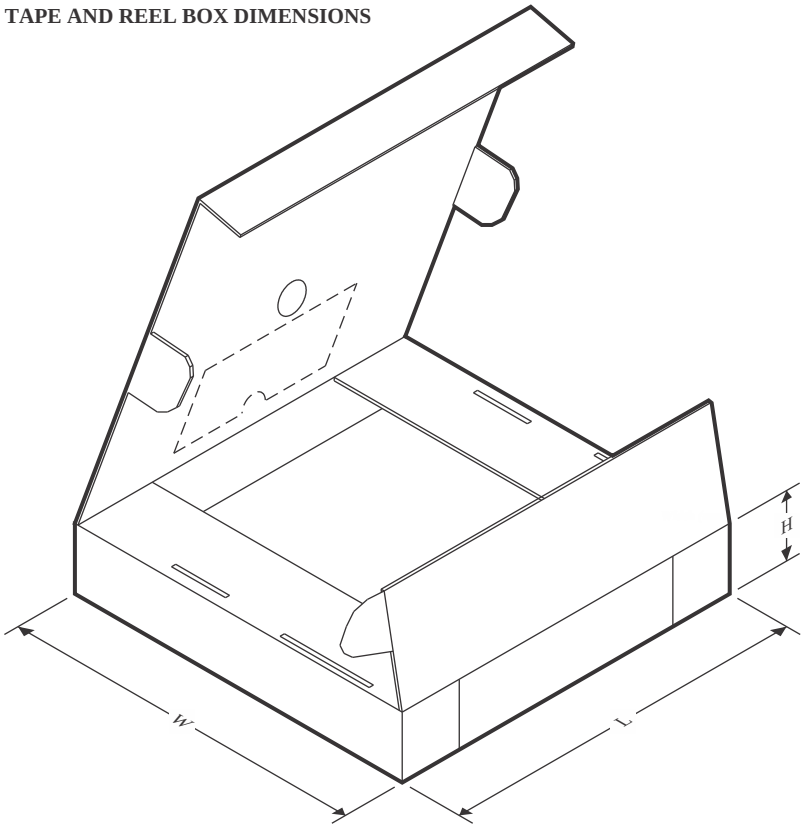

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPA2025D1YZGR	DSBGA	YZG	12	3000	182.0	182.0	20.0
TPA2025D1YZGT	DSBGA	YZG	12	250	182.0	182.0	20.0

YZG (R-XBGA-N12) DIE-SIZE BALL GRID ARRAY

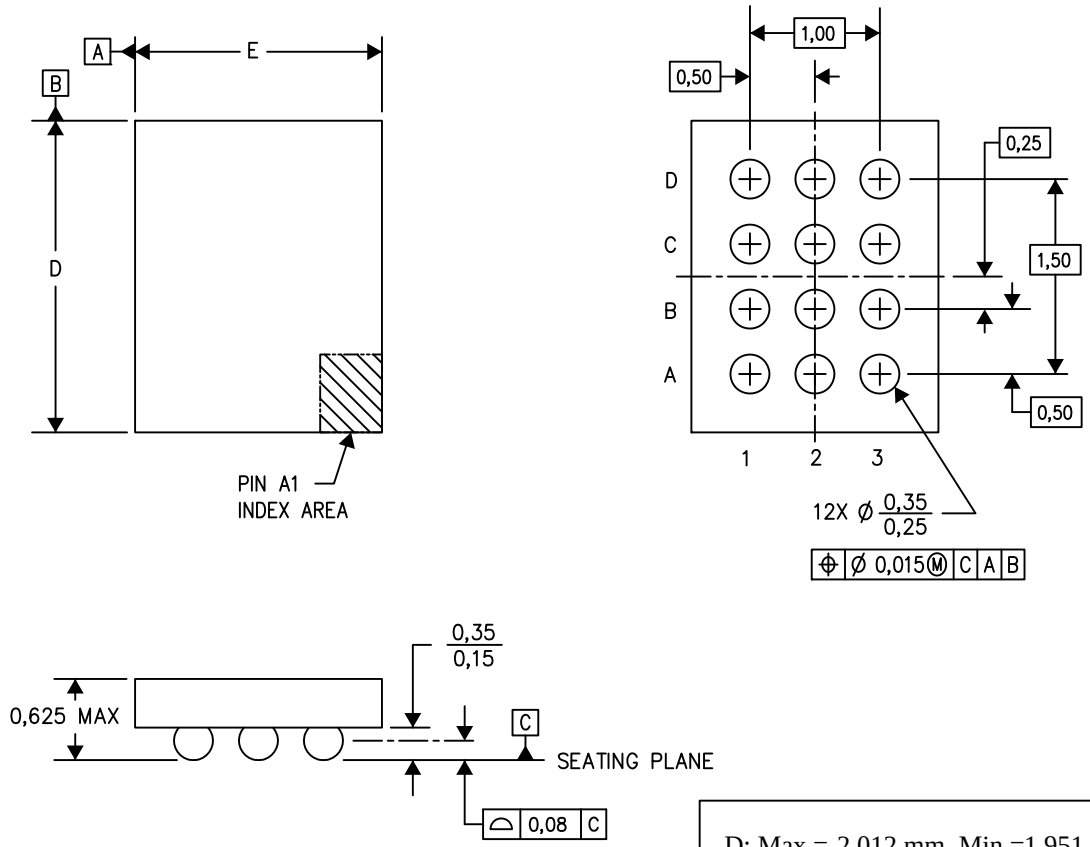

D: Max = 2.012 mm, Min =1.951 mm

E: Max = 1.56 mm, Min =1.499 mm

4205059/E 07/13

NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
B. This drawing is subject to change without notice.
C. NanoFree™ package configuration.

NanoFree is a trademark of Texas Instruments.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated