UFX6000

USB 2.0 Hi-Speed Graphics Controller with VGA, HDMI/DVI, and Digital RGB Interfaces

Highlights

- Single-Chip Hi-Speed USB 2.0 Graphics Adapter
- USB 2.0 Device Controller with Integrated USB 2.0 PHY
- Highly Efficient Compression Algorithm
- HDMI/DVI Display Connectivity via Integrated HDMI/DVI Controller/PHY
- VGA Display Connectivity via Integrated Video DAC
- Support for External Display Interface IC's via Digital RGB Interface
- High Performance DDR2 SDRAM Controller with Integrated DDR2 PHY

Target Applications

- USB to Video Adapters
- Docking Stations, USB Port Replicators
- Thin Clients
- USB Monitors and Projectors
- Embedded Systems

Features

- USB 2.0 Device Controller
  - Fully compliant with Universal Serial Bus Specification Revision 2.0
  - Operates in HS (480 Mbps) mode
  - Supports Control, Bulk-Out, and Interrupt-In endpoints
  - Supports vendor specific commands
  - Integrated USB 2.0 PHY
  - Integrated USB termination pull-up/pull-down resistors
  - Short circuit protection of USB differential signals
- Graphics Subsystem
  - Integrated HDMI/DVI Controller and PHY
    - Complies with DVI specification v1.0
    - Complies with HDMI specification v1.3
    - S/PDIF and I^2S inputs for HDMI audio (2-channel uncompressed PCM)
    - Master I^2C interface for DDC connection
  - Integrated Triple 10-bit Video DAC with VGA output
  - Digital RGB Interface
    - 12/15-bit double data rate digital RGB
    - 24-bit single data rate digital RGB
  - Supports up to 2048x1152 (QWXGA) with 32-bit color
  - 8-bit and 16-bit color support
  - Supports display cloning and extending
  - Standard and wide screen aspect ratios
  - Complies with VESA auto display identification
  - Gamma correction
  - Color Look-Up Table (CLUT)
  - Triple-buffered animations
  - Graphics Engine
    - Optimized algorithms for static and dynamic content
    - I^2C controller
- DDR2 SDRAM Controller
  - 16-bit data bus, 13-bit address bus
  - JEDEC DDR2 compliant (JESD79-2E)
  - Integrated DDR2 SDRAM PHY
- Power
  - Reduced power operating modes
  - Supports bus-powered and self-powered operation
- Miscellaneous Features
  - Optional EEPROM controller
  - IEEE 1149.1 (JTAG) boundary scan TAP controller
- Software
  - Microsoft Windows® XP/Vista/7 drivers
- Packaging & Environmental
  - 225-ball LFBGA, RoHS compliant package
  - Commercial temperature range (0°C to +70°C)

© 2010 - 2015 Microchip Technology Inc.

TO OUR VALUED CUSTOMERS

It is our intention to provide our valued customers with the best documentation possible to ensure successful use of your Microchip products. To this end, we will continue to improve our publications to better suit your needs. Our publications will be refined and enhanced as new volumes and updates are introduced.

If you have any questions or comments regarding this publication, please contact the Marketing Communications Department via E-mail at **docerrors@microchip.com**. We welcome your feedback.

Most Current Data Sheet

To obtain the most up-to-date version of this data sheet, please register at our Worldwide Web site at:

http://www.microchip.com

You can determine the version of a data sheet by examining its literature number found on the bottom outside corner of any page. The last character of the literature number is the version number, (e.g., DS30000000A is version A of document DS30000000).

Errata

An errata sheet, describing minor operational differences from the data sheet and recommended workarounds, may exist for current devices. As device/documentation issues become known to us, we will publish an errata sheet. The errata will specify the revision of silicon and revision of document to which it applies.

To determine if an errata sheet exists for a particular device, please check with one of the following:

- Microchip's Worldwide Web site; http://www.microchip.com
- Your local Microchip sales office (see last page)

When contacting a sales office, please specify which device, revision of silicon and data sheet (include -literature number) you are using.

Customer Notification System

Register on our web site at **www.microchip.com** to receive the most current information on all of our products.

© 2010 - 2015 Microchip Technology Inc.

Table of Contents


1.0 Introduction 4
2.0 Pin Description and Configuration 6
3.0 Power Connections 22
4.0 EEPROM 23
5.0 Operational Characteristics 28
6.0 Package Outline 39
Appendix A: Data Sheet Revision History 40
The Microchip Web Site 41
Customer Change Notification Service 41
Customer Support 41
Product Identification System 42

1.0 INTRODUCTION

The UFX6000 is a high performance USB 2.0 graphics adapter with multiple graphics interfaces. The UFX6000 is an ideal solution for extending a PC workspace to an additional monitor without the need for an additional internal graphics card. With applications ranging from docking stations, USB port replicators, USB monitors/projectors, and embedded systems, the UFX6000 is targeted as a high performance, low cost USB-to-graphics solution.

The UFX6000 contains an integrated USB 2.0 Device Controller, USB 2.0 PHY, USB Bulk-Out Controller, Control Endpoint, Interrupt-In Endpoint, DDR2 SDRAM Controller/PHY, Graphics Engine, HDMI/DVI Controller/PHY, Video DAC, TAP Controller, EEPROM Controller, and I^{2}C Controller. Figure 1-1 details an internal block diagram of the UFX6000.

FIGURE 1-1: INTERNAL BLOCK DIAGRAM

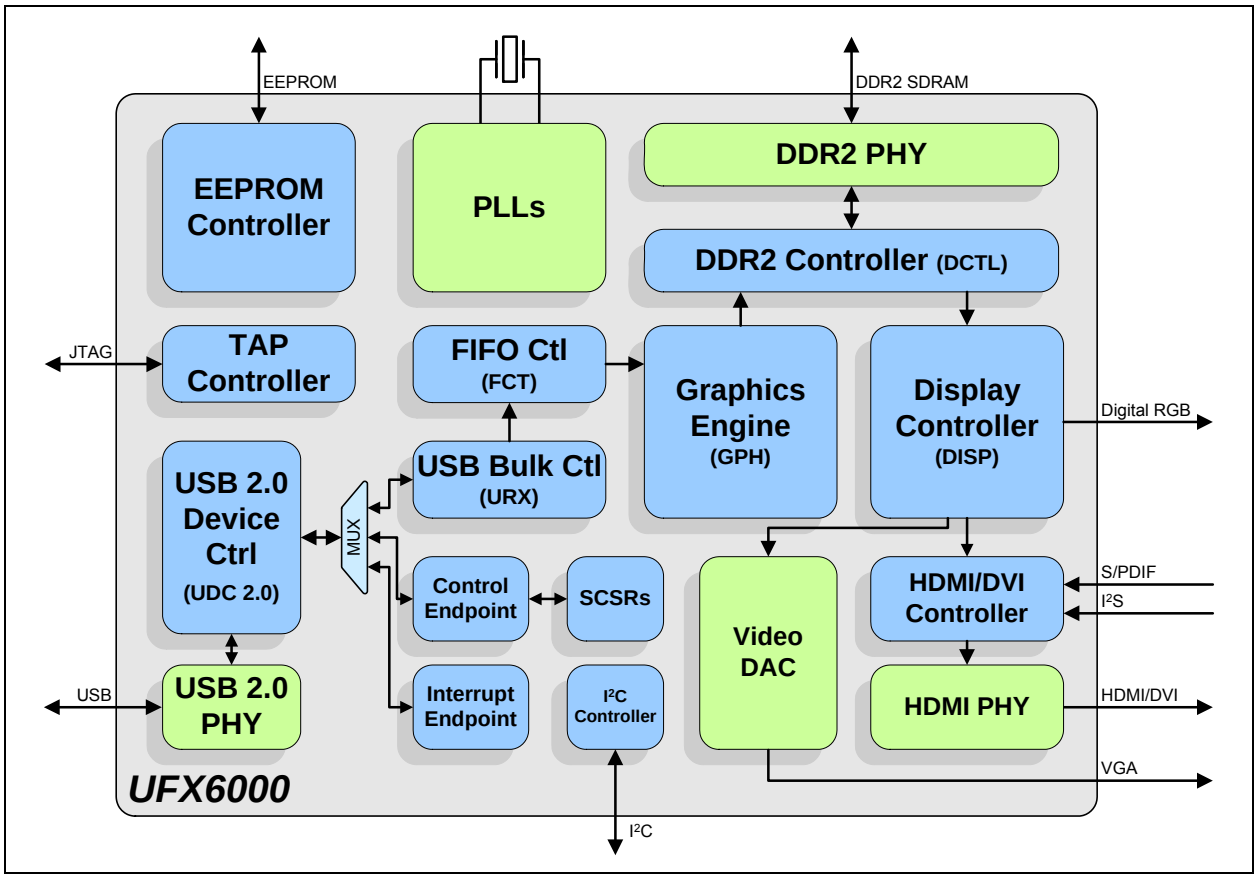

1.1 USB Device Controller

The USB Device Controller is fully compliant with the USB 2.0 Specification, enabling the device to operate in Hi-Speed (480 Mbps) mode. An integrated USB 2.0 PHY is provided on the USB port.

The controller implements three USB endpoints: Control, Bulk-Out, and Interrupt-In. The Bulk-Out endpoint allows for uncompressed or compressed graphics data reception from the USB port. The USB Bulk-Out Controller collects the graphics information and transfers it to the Graphics Engine. Implementation of vendor-specific commands allows for access to the device System Control and Status Registers (SCSRs).

1.2 Graphics Subsystem

The Graphics Subsystem consists of the following main blocks: the Graphics Engine, Display Controller, HDMI/DVI Controller/PHY, Video DAC, and the Digital RGB Interface. Together, these blocks support high definition resolutions of up to 2048x1152 (QWXGA) with 32-bit true color in both standard and wide screen aspect ratios. The HDMI/DVI interface is compliant with the HDMI v1.3 and DVI v1.0 specifications and supports 2-channel uncompressed PCM audio via a S/PDIF or I^{2}S input. The Display Controller also supports 8-bit and 16-bit color, gamma correction, Color Look-Up Table

© 2010 - 2015 Microchip Technology Inc.

(CLUT) and triple-buffered animations. The DDC2B/EDID VESA standard is supported, allowing the host OS and device drivers to query the monitor's frequency, resolution, and other features for true plug-and-play and intelligent mode setting capabilities.

Once the graphics data has been received via the USB Bulk-Out Controller, it is sent to the Graphics Engine. If the data is compressed, the Graphics Engine decompresses it via algorithms that have been optimized for speed and quality. The device's decompression algorithms have been designed to work seamlessly with the compression algorithms utilized in the software device drivers.

The graphics data is then transferred to the SDRAM via the DDR2 SDRAM Controller. The Display Controller generates all display and interface timing signals, retrieves the graphics data from the DDR2 SDRAM, and sends it to the HDMI/DVI Controller/PHY, Video DAC, or Digital RGB Interface.

The Digital RGB Interface may be used to connect external display interface IC's (e.g., DisplayPort, etc.) via the provided RGB data channel busses and control signals. The Digital RGB Interface supports two modes of operation: 24-bit single data rate mode and 12/15-bit double data rate mode. 24-bit mode is single edge triggered and utilizes the full 24-bit data bus width. The 12/15-bit mode is triggered on both clock edges and utilizes 12/15-bits of the data bus width.

1.3 DDR2 SDRAM Interface

The UFX6000 provides a full JEDEC compliant (JESD79-2E) DDR2 SDRAM Controller and PHY for interfacing to external DDR2 SDRAM. The DDR2 SDRAM interface is comprised of JEDEC standard 1.8V I/O signals grouped into control signals, a 16-bit data bus, and a 13-bit address bus.

The DDR2 SDRAM Controller transfers the graphics data in and out of external SDRAM through the DDR2 SDRAM PHY. External SDRAM is used as storage for the graphics and acts a a buffer between the Graphics Engine and Display Controller.

1.4 Peripherals

The UFX6000 also contains an EEPROM Controller, I^2C Controller, and TAP Controller.

The EEPROM Controller allows connection to an external EEPROM for automatic loading of static configuration data upon power-on, pin reset, or software reset. The EEPROM can be configured to load USB descriptors and USB device configuration.

The integrated IEEE 1149.1 compliant TAP controller provides boundary scan via JTAG.

© 2010 - 2015 Microchip Technology Inc.

2.0 PIN DESCRIPTION AND CONFIGURATION

FIGURE 2-1: PIN ASSIGNMENTS (TOP VIEW)

UFX6000
225-LFBGA
TOP VIEW

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
A	DDRFIFOWE_IN	DDRFIFOWE_OUT	DDRDQ7	nDDRDQS0	DDRDM0	DDRDQ1	nDDRWE	DDRA10	DDRA3	DDRA9	DDRCK	nDDRCAS	DDRA2	DDRA4	DDRA8	A
B	DDRVREF0	DDRDQ5	DDRDQ0	DDRDQS0	DDRDQ6	DDRDQ3	DDRCKE	DDRBA0	DDRA7	DDRA12	nDDRCK	nDDRCS	DDRA6	DDRA11	VSS	B
C	DDRDQ9	DDRDQ11	DDRDQ12	DDRDQ2	VDD18DDR	DDRDQ4	DDRBA1	DDRA1	DDRA5	nDDRRAS	VDD18DDR	DDRA0	DDRODT	VSS	EXTSWING	C
D	DDRDQS1	DDRDM1	DDRDQ14	VDD18DDR	VDD18DDR	DDRVREF2	VDD18DDR	VDD18DDR	VDD18DDR	VDD18DDR	VDD18DDR	VDD18DDR	VDD18DDR	TX2P	TX2N	D
E	nDDRDQS1	DDRDQ8	DDRDQ15	VDD18DDR	VDD18DDR	VDD12CORE	VSS	VDD12CORE	VSS	VDD12CORE	VDD18DDR	VSSHDMI	VDD12HDMI	TX1P	TX1N	E
F	DDRDQ13	DDRDQ10	DDRVREF1	VDD18DDR	VDD12CORE	VSS	VSS	VSS	VSS	VSS	VDD12CORE	VSSHDMI	VDD12HDMI	TX0P	TX0N	F
G	VSS	VSS	TEST1	VSS	VSS	VSS	VSS	VSS	VSS	VSS	VDD12CORE	VSSHDMI	VDD12HDMI	TXCP	TXCN	G
H	NC	NC	TEST2	TEST3	VDD12CORE	VSS	VSS	VSS	VSS	VSS	VSSVDAC	IREF	VSSVDAC	VDACR	nVDACR	H
J	NC	NC	VSS	NC	VSS	VSS	VSS	VSS	VSS	VSS	VDD33VDAC	VDD33VDAC	VDD33VDAC	VDACG	nVDACG	J
K	I2CSDA1/ GPIO27	I2CSDA0	I2CSCL1/ GPIO28	I2CSCL0	VDD12CORE	VSS	VSS	VSS	VSS	VSS	VDACREF	VDAC_HSYNC	VDAC_VSYNC	VDACB	nVDACB	K
L	USBDP	USBDM	VBUS_DET	AUDIO_DIS/ GPIO30	VDD33IO	VDD12CORE	VSS	VDD12CORE	VSS	VDD12CORE	VDD33IO	VDD33IO	WS/GPIO29	MCLK/ GPIO25	SPDIF/ I2SDATA/ GPIO26	L
M	VDD33USB	NC	HPD	VDATAB4/ VD3/GPIO20	VDD33IO	VDD33IO	VDD33IO	VDATAG4/ VD9/GPIO12	VDD33IO	VDATAR5/ GPIO5	VDD33IO	TDI	INT	EECS	EECLK	M
N	XI	VDD12USBPLL	USBRBIAS	VDATAB3/ VD4/GPIO19	VDATAB0/ GPIO16	nBLANK	VDATAG7/ GPIO15	VDATAG3/ GPIO11	VDATAG0/ VD11/GPIO8	VDATAR4/ VD13/GPIO4	VDATAR1/ GPIO1	TDO	nEXTRST	NC	NC	N
P	XO	SYSPLLG	VDATAB6/ VD1/GPIO22	VDATAB2/ VD5/GPIO18	HSYNC	nVCLK	VDATAG6/ VD7/GPIO14	VDATAG2/ GPIO10	VDATAR7/ VD12/GPIO7	VDATAR3/ VD14/GPIO3	VDATAR0/ I2SCLKALT0/ GPIO0	TCK	nSW_MODE	nRESET	EEDI	P
R	SYSPLLP	VDATAB7/ VD0/GPIO23	VDATAB5/ VD2/GPIO21	VDATAB1/ VD6/GPIO17	VSYNC	VCLK	VDATAG5/ VD8/GPIO13	VDATAG1/ VD10/GPIO9	VDATAR6/ GPIO6	VDATAR2/ VD15/GPIO2	nTRST	TMS	NC	LED/ I2SCLKALT1/ GPIO24	EEDO	R
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	

© 2010 - 2015 Microchip Technology Inc.

TABLE 2-1: USB PINS

Num Pins	Name	Symbol	Buffer Type	Description
1	USB DMINUS	**USBDM**	AIO	USB Data Minus. **Note:** The functionality of this pin may be swapped to USB DPLUS via the Port Swap bit of Configuration Flags 0 of the EEPROM.
1	USB DPLUS	**USBDP**	AIO	USB Data Plus. **Note:** The functionality of this pin may be swapped to USB DMINUS via the Port Swap bit of Configuration Flags 0 of the EEPROM.
1	External USB Bias Resistor	**USBRBIAS**	AI	Used for setting HS transmit current level and on-chip termination impedance. Connect to an external 12K 1.0% resistor to ground.
1	Crystal Input	**XI**	ICLK	External 25 MHz crystal input. **Note:** This pin can also be driven by a single-ended clock oscillator. When this method is used, XO should be left unconnected.
1	Crystal Output	**XO**	OCLK	External 25 MHz crystal output.

TABLE 2-2: DIGITAL RGB PINS

Num Pins	Name	Symbol	Buffer Type	Description
1	Video Clock High	**VCLK**	RGB	Active high video clock.
1	Video Clock Low	**nVCLK**	RGB	Active low video clock.
1	Horizontal Sync	**HSYNC**	RGB	Video horizontal synchronization output.
1	Vertical Sync	**VSYNC**	RGB	Video vertical synchronization output.
1	Video Blanking	**nBLANK**	RGB	Active low video blanking signal.
1	Blue Pixel Data Channel Bit 7	**VDATAB7**	RGB	Blue Pixel Video Data Bit 7, RGB Single Ended Mode.
	DDR RGB Data 0	**VD0**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O 23	**GPIO23**	IS/O8/OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Blue Pixel Data Channel Bit 6	**VDATAB6**	RGB	Blue Pixel Video Data Bit 6, RGB Single Ended Mode.
	DDR RGB Data 1	**VD1**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O 22	**GPIO22**	IS/O8/OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.

TABLE 2-2: DIGITAL RGB PINS (CONTINUED)

Num Pins	Name	Symbol	Buffer Type	Description
1	Blue Pixel Data Channel Bit 5	**VDATAB5**	RGB	Blue Pixel Video Data Bit 5, RGB Single Ended Mode.
	DDR RGB Data 2	**VD2**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O 21	**GPIO21**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Blue Pixel Data Channel Bit 4	**VDATAB4**	RGB	Blue Pixel Video Data Bit 4, RGB Single Ended Mode.
	DDR RGB Data 3	**VD3**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O 20	**GPIO20**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Blue Pixel Data Channel Bit 3	**VDATAB3**	RGB	Blue Pixel Video Data Bit 3, RGB Single Ended Mode.
	DDR RGB Data 4	**VD4**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O 19	**GPIO19**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Blue Pixel Data Channel Bit 2	**VDATAB2**	RGB	Blue Pixel Video Data Bit 2, RGB Single Ended Mode.
	DDR RGB Data 5	**VD5**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O 18	**GPIO18**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Blue Pixel Data Channel Bit 1	**VDATAB1**	RGB	Blue Pixel Video Data Bit 1, RGB Single Ended Mode.
	DDR RGB Data 6	**VD6**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O 17	**GPIO17**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Blue Pixel Data Channel Bit 0	**VDATAB0**	RGB	Blue Pixel Video Data Bit 0, RGB Single Ended Mode.
	General Purpose I/O 16	**GPIO16**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Green Pixel Data Channel Bit 7	**VDATAG7**	RGB	Green Pixel Video Data Bit 7, RGB Single Ended Mode.
	General Purpose I/O 15	**GPIO15**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.

© 2010 - 2015 Microchip Technology Inc.

TABLE 2-2: DIGITAL RGB PINS (CONTINUED)

Num Pins	Name	Symbol	Buffer Type	Description
1	Green Pixel Data Channel Bit 6	**VDATAG6**	RGB	Green Pixel Video Data Bit 6, RGB Single Ended Mode.
	DDR RGB Data 7	**VD7**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O 14	**GPIO14**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Green Pixel Data Channel Bit 5	**VDATAG5**	RGB	Green Pixel Video Data Bit 5, RGB Single Ended Mode.
	DDR RGB Data 8	**VD8**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O 13	**GPIO13**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Green Pixel Data Channel Bit 4	**VDATAG4**	RGB	Green Pixel Video Data Bit 4, RGB Single Ended Mode.
	DDR RGB Data 9	**VD9**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O 12	**GPIO12**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Green Pixel Data Channel Bit 3	**VDATAG3**	RGB	Green Pixel Video Data Bit 3, RGB Single Ended Mode.
	General Purpose I/O 11	**GPIO11**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Green Pixel Data Channel Bit 2	**VDATAG2**	RGB	Green Pixel Video Data Bit 2, RGB Single Ended Mode.
	General Purpose I/O 10	**GPIO10**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Green Pixel Data Channel Bit 1	**VDATAG1**	RGB	Green Pixel Video Data Bit 1, RGB Single Ended Mode.
	DDR RGB Data 10	**VD10**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O 9	**GPIO9**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.

TABLE 2-2: DIGITAL RGB PINS (CONTINUED)

Num Pins	Name	Symbol	Buffer Type	Description
1	Green Pixel Data Channel Bit 0	**VDATAG0**	RGB	Green Pixel Video Data Bit 0, RGB Single Ended Mode.
	DDR RGB Data 11	**VD11**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O 8	**GPIO8**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Red Pixel Data Channel Bit 7	**VDATAR7**	RGB	Red Pixel Video Data Bit 7, RGB Single Ended Mode.
	DDR RGB Data 12	**VD12**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O 7	**GPIO7**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Red Pixel Data Channel Bit 6	**VDATAR6**	RGB	Red Pixel Video Data Bit 6, RGB Single Ended Mode.
	General Purpose I/O 6	**GPIO6**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Red Pixel Data Channel Bit 5	**VDATAR5**	RGB	Red Pixel Video Data Bit 5, RGB Single Ended Mode.
	General Purpose I/O 5	**GPIO5**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Red Pixel Data Channel Bit 4	**VDATAR4**	RGB	Red Pixel Video Data Bit 4, RGB Single Ended Mode.
	DDR RGB Data 13	**VD13**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O4	**GPIO4**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Red Pixel Data Channel Bit 3	**VDATAR3**	RGB	Red Pixel Video Data Bit 3, RGB Single Ended Mode.
	DDR RGB Data 14	**VD14**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O 3	**GPIO3**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.

© 2010 - 2015 Microchip Technology Inc.

TABLE 2-2: DIGITAL RGB PINS (CONTINUED)

Num Pins	Name	Symbol	Buffer Type	Description
1	Red Pixel Data Channel Bit 2	**VDATAR2**	RGB	Red Pixel Video Data Bit 2, RGB Single Ended Mode.
	DDR RGB Data 15	**VD15**	RGB	Used in RGB DDR Mode, refer to Table 2-3.
	General Purpose I/O 2	**GPIO2**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Red Pixel Data Channel Bit 1	**VDATAR1**	RGB	Red Pixel Video Data Bit 1, RGB Single Ended Mode.
	General Purpose I/O 1	**GPIO1**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Red Pixel Data Channel Bit 0	**VDATAR0**	RGB	Red Pixel Video Data Bit 0, RGB Single Ended Mode.
	I^2S Clock Alternate Input 0	**I2SCLKALT0**	IS	I^2S Clock alternate input 0. The I^2S clock input pin is selectable between the I2SCLKALT0 or I2SCLKALT1 pins. **Note:** If the single data rate RGB interface is enabled, I2SCLKALT1 should be used. I2SCLKALT0 should be used in all other cases.
	General Purpose I/O 0	**GPIO0**	IS/O8/ OD8 (PU) Note 2-1	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.

Note 2-1 The internal pull-up is disabled when the GPIO is configured as an O8 buffer type.

TABLE 2-3: RGB / DDR MODE MAPPING TABLE

SDR (24-Bit Mode)	DDR Name	DDR (12-Bit Mode)		DDR (15-Bit Mode)	
		VCLK Rising Edge	VCLK Falling Edge	vCLK Rising Edge	VCLK Falling Edge
VCLK					
nVCLK					
HSYNC					
VSYNC					
nBLANK					
VDATAB7	VD0	-	-	BLUE0	GREEN5
VDATAB6	VD1	-	-	BLUE1	GREEN6
VDATAB5	VD2	BLUE0	GREEN4	BLUE2	GREEN7
VDATAB4	VD3	BLUE1	GREEN5	BLUE3	GREEN8
VDATAB3	VD4	BLUE2	GREEN6	BLUE4	GREEN9
VDATAB2	VD5	BLUE3	GREEN7	BLUE5	RED0
VDATAB1	VD6	BLUE4	RED0	BLUE6	RED1
VDATAB0	-	-	-	-	-

TABLE 2-3: RGB / DDR MODE MAPPING TABLE (CONTINUED)

SDR (24-Bit Mode)	DDR Name	DDR (12-Bit Mode)		DDR (15-Bit Mode)	
		VCLK Rising Edge	VCLK Falling Edge	vCLK Rising Edge	VCLK Falling Edge
VDATAG7	-	-	-	-	-
VDATAG6	VD7	BLUE5	RED1	BLUE7	RED2
VDATAG5	VD8	BLUE6	RED2	BLUE8	RED3
VDATAG4	VD9	BLUE7	RED3	BLUE9	RED4
VDATAG3	-	-	-	-	-
VDATAG2	-	-	-	-	-
VDATAG1	VD10	-	-	GREEN0	RED5
VDATAG0	VD11	-	-	GREEN1	RED6
VDATAR7	VD12	GREEN0	RED4	GREEN2	RED7
VDATAR6	-	-	-	-	-
VDATAR5	-	-	-	-	-
VDATAR4	VD13	GREEN1	RED5	GREEN3	RED8
VDATAR3	VD14	GREEN2	RED6	GREEN4	RED9
VDATAR2	VD15	GREEN3	RED7	-	-
VDATAR1	-	-	-	-	-
VDATAR0	-	-	-	-	-

TABLE 2-4: VDAC PINS

Num Pins	Name	Symbol	Buffer Type	Description
1	VDAC VSYNC	**VDAC_VSYNC**	RGB	VDAC vertical synchronization output.
1	VDAC HSYNC	**VDAC_HSYNC**	RGB	VDAC horizontal synchronization output.
1	Positive Red Analog Output	**VDACR**	AO	Positive Red VDAC analog output current.
1	Negative Red Analog Output	**nVDACR**	AO	Negative Red VDAC analog output current.
1	Positive Green Analog Output	**VDACG**	AO	Positive Green VDAC analog output current.
1	Negative Green Analog Output	**nVDACG**	AO	Negative Green VDAC analog output current.
1	Positive Blue Analog Output	**VDACB**	AO	Positive Blue VDAC analog output current.
1	Negative Blue Analog Output	**nVDACB**	AO	Negative Blue VDAC analog output current.
1	VDAC Reference Current	**IREF**	AI	VDAC reference current. Output current when using External Reference Resistor or Input Reference Current when using external current source.

© 2010 - 2015 Microchip Technology Inc.

TABLE 2-5: DDR2 MEMORY PINS

Num Pins	Name	Symbol	Buffer Type	Description
13	DDR2 Memory Address Bus	**DDRA[12:0]**	DDR2O	Bits 12:0 of the external DDR2 memory address bus.
16	DDR2 Memory Data Bus	**DDRDQ[15:0]**	DDR2I/ DDR2O	Bits 15:0 of the external DDR2 memory data bus.
2	DDR2 Memory Bank Address	**DDRBA[1:0]**	DDR2O	DDR2 memory bank address.
1	DDR2 Memory Clock High	**DDRCK**	DDR2O	Active high DDR2 clock. This clock is the complement of nDDRCK.
1	DDR2 Memory Clock Low	**nDDRCK**	DDR2O	Active low DDR2 clock. This clock is the complement of DDRCK.
1	DDR2 Memory Clock Enable Output	**DDRCKE**	DDR2O	DDR2 clock enable signal.
1	DDR2 Memory Chip Select	**nDDRCS**	DDR2O	Active low chip select.
1	DDR2 Memory Row Address Strobe	**nDDRRAS**	DDR2O	Active low row address strobe.
1	DDR2 Memory Column Address Strobe	**nDDRCAS**	DDR2O	Active low column address strobe.
1	DDR2 Memory Write Enable	**nDDRWE**	DDR2O	Active low write enable.
1	DDR2 On Die Termination	**DDRODT**	DDR2O	DDR2 on die termination.
1	DDR2 Memory Lower Byte Mask	**DDRDM0**	DDR2O	Mask bit for lower byte of DDR2 data word.
1	DDR2 Memory Upper Byte Mask	**DDRDM1**	DDR2O	Mask bit for upper byte of DDR2 data word.
1	DDR2 Memory Lower Byte Strobe High	**DDRDQS0**	DDR2I/ DDR2O	Active high data strobe for lower byte of DDR2 data word.
1	DDR2 Memory Lower Byte Strobe Low	**nDDRDQS0**	DDR2I/ DDR2O	Active low data strobe for upper byte of DDR2 data word.
1	DDR2 Memory Upper Byte Strobe High	**DDRDQS1**	DDR2I/ DDR2O	Active high data strobe for upper byte of DDR2 data word.
1	DDR2 Memory Upper Byte Strobe Low	**nDDRDQS1**	DDR2I/ DDR2O	Active low data strobe for upper byte of DDR2 data word.
1	DDR2 Memory Reference Voltage 0	**DDRVREF0**	AI	Reference voltage input pin for DDR2 Memory. DDRVREF0 must be half the VDD18DDR voltage.
1	DDR2 Memory Reference Voltage 1	**DDRVREF1**	AI	Reference voltage input pin for DDR2 Memory. DDRVREF1 must be half the VDD18DDR voltage.
1	DDR2 Memory Reference Voltage 2	**DDRVREF2**	AI	Reference voltage input pin for DDR2 Memory. DDRVREF2 must be half the VDD18DDR voltage.

© 2010 - 2015 Microchip Technology Inc.

TABLE 2-5: DDR2 MEMORY PINS (CONTINUED)

Num Pins	Name	Symbol	Buffer Type	Description
1	DQS Enable Timing Match Input	**DDRFIFOWE_IN**	DDR2I	DQS enable input for timing match between DQS and system clock.
1	DQS Enable Timing Match Output	**DDRFIFOWE_OUT**	DDR2O	DQS enable output for timing match between DQS and system clock.

TABLE 2-6: HDMI PINS

Num Pins	Name	Symbol	Buffer Type	Description
1	TMDS Clock Positive	**TXCP**	AO	TMDS clock output differential positive signal.
1	TMDS Clock Negative	**TXCN**	AO	TMDS clock output differential negative signal.
1	TMDS Out0 Positive	**TX0P**	AO	TMDS Output 0 differential positive signal.
1	TMDS Out0 Negative	**TX0N**	AO	TMDS Output 0 differential negative signal.
1	TMDS Out1 Positive	**TX1P**	AO	TMDS Output 1 differential positive signal.
1	TMDS Out1 Negative	**TX1N**	AO	TMDS Output 1 differential negative signal.
1	TMDS Out2 Positive	**TX2P**	AO	TMDS Output 2 differential positive signal.
1	TMDS Out2 Negative	**TX2N**	AO	TMDS Output 2 differential negative signal.
1	Voltage Swing Adjust	**EXTSWING**	AI	Connect this pin to an external resistor going to ground. The resistor determines the amplitude of the voltage swing. A low capacitive connection is allowed. A value of 5K is recommended.
1	Hot Plug Detect	**HPD**	IS	Hot plug detect signal.

© 2010 - 2015 Microchip Technology Inc.

TABLE 2-7: EEPROM PINS

Num Pins	Name	Symbol	Buffer Type	Description
1	EEPROM Data In	**EEDI**	IS (PD)	This pin is driven by the EEDO output of the external EEPROM.
1	EEPROM Data Out	**EEDO**	O8	This pin drives the EEDI input of the external EEPROM. **Note:** This pin is also used for internal production test purposes and should never be pulled high. If connected to a load, use of an external 4.7K pull-down resistor is recommended.
1	EEPROM Chip Select	**EECS**	O8	This pin drives the chip select output of the external EEPROM. **Note:** The EECS output may tri-state briefly during power-up. Some EEPROM devices may be prone to false selection during this time. When an EEPROM is used, an external pull-down resistor is recommended on this signal to prevent false selection. Refer to your EEPROM manufacturer's datasheet for additional information.
1	EEPROM Clock	**EECLK**	O8	This pin drives the EEPROM clock of the external EEPROM.

TABLE 2-8: JTAG PINS

Num Pins	Name	Symbol	Buffer Type	Description
1	JTAG Test Data Out	**TDO**	O8	JTAG data output.
1	JTAG Test Clock	**TCK**	IS	JTAG test clock. The maximum operating frequency of this clock is 25MHz.
1	JTAG Test Mode Select	**TMS**	IS	JTAG test mode select.
1	JTAG Test Data Input	**TDI**	IS	JTAG data input.
1	JTAG Test Port Reset	**nTRST**	IS	JTAG test port reset input.

© 2010 - 2015 Microchip Technology Inc.

TABLE 2-9: MISCELLANEOUS PINS

Num Pins	Name	Symbol	Buffer Type	Description
1	LED	**LED**	O8/ OD8 (PU)	Can be used to provide device status. Alternatively, the LED can be configured for a fast or slow blink in accordance with the USB graphics data receive rate.
	I^2S Clock Alternate Input 1	**I2SCLKALT1**	IS	I^2S Clock alternate input 1. The I^2S clock input pin is selectable between the I2SCLKALT0 or I2SCLKALT1 pins. **Note:** If the single data rate RGB interface is enabled, I2SCLKALT1 should be used. I2SCLKALT0 should be used in all other cases.
	General Purpose I/O 24	**GPIO24**	IS/O8/ OD8 (PU) Note 2-3	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Interrupt	**INT**	IS	For use by external transmitter to signal an event requiring servicing.
1	External Reset Output	**nEXTRST**	O8	Used to reset the external transmitter. The polarity and period of the reset signal generated on this pin is programmable via internal registers.
1	Switching Regulator Mode	**nSW_MODE**	O8	When asserted, this pin can be used to place the external switching regulator into power saving mode. **Note:** The SW_MODE Polarity bit of Configuration Flags 0 controls the polarity of the pin.
1	System Reset Input	**nRESET**	IS	This active-low pin allows external hardware to reset the device. **Note:** Assertion of nRESET is required following power-on.
1	Detect Upstream VBUS Power	**VBUS_DET**	IS	Detects the state of the upstream bus power. For bus powered operation, this pin must be tied to VDD33IO. For self powered operation, refer to the device reference schematics. **Note:** The VBUS_DET signal is deglitched for a period of 10 ms.
1	I^2C Data 0	**I2CSDA0**	IS/ OD8 Note 2-2	Bi-directional I^2C data 0 signal.
1	I^2C Clock 0	**I2CSCL0**	IS/ OD8 Note 2-2	Bi-directional I^2C clock 0 signal. All I^2C transactions are synchronous to the rising edge of this clock. The device supports the I^2C standard mode of operation (100 Kb/s). As an I^2C master, the device drives this clock.
1	I^2C Data 1	**I2CSDA1**	IS/ OD8 Note 2-2	Bi-directional I^2C data 1 signal.
	General Purpose I/O 27	**GPIO27**	IS/ O8/ OD8 (PU) Note 2-3	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.

© 2010 - 2015 Microchip Technology Inc.

TABLE 2-9: MISCELLANEOUS PINS (CONTINUED)

Num Pins	Name	Symbol	Buffer Type	Description
1	I^2C Clock 1	**I2CSCL1**	IS/OD8 Note 2-2	Bi-directional I^2C clock 1 signal. All I^2C transactions are synchronous to the rising edge of this clock. The device supports the I^2C standard mode of operation (100 Kb/s). As an I^2C master, the device drives this clock.
	General Purpose I/O 28	**GPIO28**	IS/O8/ OD8 (PU) Note 2-3	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Audio Input Master Clock	**MCLK**	IS	Audio input master clock. This clock is coherent with the S/PDIF audio input.
	General Purpose I/O 25	**GPIO25**	IS/O8/ OD8 (PU) Note 2-3	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	S/PDIF Audio Input	**SPDIF**	IS	Digital audio interface input. Supports PCM, Dolby Digital, and DTS Digital audio transmission. **Note:** Usage of SPDIF requires the MCLK audio input master clock pin.
	I^2S Data	**I2SDATA**	IS	I^2S Data input.
	General Purpose I/O 26	**GPIO26**	IS/O8/ OD8 (PU) Note 2-3	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Audio Word Select	**WS**	IS	Specifies the I^2S word select input of the audio processor.
	General Purpose I/O 29	**GPIO29**	IS/O8/ OD8 (PU) Note 2-3	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Audio CODEC Disconnect	**AUDIO_DIS**	O8	This pin is used for disconnecting an external USB audio CODEC. Refer to the UFX6000 reference schematic for additional details.
	General Purpose I/O 30	**GPIO30**	IS/O8/ OD8 (PU) Note 2-3	This General Purpose I/O pin is fully programmable as either a push-pull output, an open-drain output, or a Schmitt-triggered input.
1	Test 1	**TEST1**	-	This pin must always be connected to VSS.
1	Test 2	**TEST2**	-	This pin must always be connected to VSS.
1	Test 3	**TEST3**	-	This pin must always be connected to VSS.

Note 2-2 If unused, this signal must be pulled to a valid state.

Note 2-3 The internal pull-up is disabled when the GPIO is configured as an O8 buffer type.

TABLE 2-10: I/O POWER PINS, CORE POWER PINS, AND GROUND PINS

Num Pins	Name	Symbol	Buffer Type	Description
1	SYS PLL Filter Pin 1	**SYSPLLP**	P	System and pixel PLL filter pin. Refer to the UFX6000 reference schematic for additional details.
1	SYS PLL Filter Pin 2	**SYSPLLG**	P	System and pixel PLL filter pin. Refer to the UFX6000 reference schematic for additional details.
3	+1.2 V HDMI Power Input	**VDD12HDMI**	P	+1.2 V HDMI power input.
3	HDMI Ground	**VSSHDMI**	P	HDMI ground.
3	+3.3 V VDAC Power Input	**VDD33VDAC**	P	+3.3 V Video DAC power input. (Note 2-4)
1	+3.3 V VDAC Reference Input	**VDACREF**	P	+3.3 V Video DAC reference voltage input. (Note 2-4)
2	VDAC Ground	**VSSVDAC**	P	Video DAC ground.
1	+3.3 V USB Power Input	**VDD33USB**	P	+3.3 V USB power input. (Note 2-4)
1	+1.2 V USB PLL Supply Input	**VDD12USBPLL**	P	+1.2 V USB PLL supply input. (Note 2-4)
15	+1.8 V DDR2 Power Input	**VDD18DDR**	P	+1.8 V DDR2 power input. (Note 2-4)
8	+3.3 V I/O Power Input	**VDD33IO**	P	+3.3 V I/O power input. (Note 2-4)
11	+1.2 V Digital Core Power Input	**VDD12CORE**	P	+1.2 V digital core power input. (Note 2-4)
37	Ground	**VSS**	P	Common Ground.

Note 2-4 Refer to Section 3.0, "Power Connections," on page 22 and the device reference schematics for additional power connection information.

TABLE 2-11: NO-CONNECT PINS

Num Pins	Name	Symbol	Buffer Type	Description
9	No Connect	**NC**	-	These pins must be left floating for normal device operation.

© 2010 - 2015 Microchip Technology Inc.

2.1 Pin Assignments

TABLE 2-12: 225-LFBGA PACKAGE PIN ASSIGNMENTS

Pin Num	Pin Name	Pin Num	Pin Name	Pin Num	Pin Name	Pin Num	Pin Name
A1	DDRFIFOWE_IN	B1	DDRVREF0	C1	DDRDQ9	D1	DDRDQS1
A2	DDRFIFOWE_OUT	B2	DDRDQ5	C2	DDRDQ11	D2	DDRDM1
A3	DDRDQ7	B3	DDRDQ0	C3	DDRDQ12	D3	DDRDQ14
A4	nDDRDQS0	B4	DDRDQS0	C4	DDRDQ2	D4	VDD18DDR
A5	DDRDM0	B5	DDRDQ6	C5	VDD18DDR	D5	VDD18DDR
A6	DDRDQ1	B6	DDRDQ3	C6	DDRDQ4	D6	DDRVREF2
A7	nDDRWE	B7	DDRCKE	C7	DDRBA1	D7	VDD18DDR
A8	DDRA10	B8	DDRBA0	C8	DDRA1	D8	VDD18DDR
A9	DDRA3	B9	DDRA7	C9	DDRA5	D9	VDD18DDR
A10	DDRA9	B10	DDRA12	C10	nDDRRAS	D10	VDD18DDR
A11	DDRCK	B11	nDDRCK	C11	VDD18DDR	D11	VDD18DDR
A12	nDDRCAS	B12	nDDRCS	C12	DDRA0	D12	VDD18DDR
A13	DDRA2	B13	DDRA6	C13	DDRODT	D13	VDD18DDR
A14	DDRA4	B14	DDRA11	C14	VSS	D14	TX2P
A15	DDRA8	B15	VSS	C15	EXTSWING	D15	TX2N
E1	nDDRDQS1	F1	DDRDQ13	G1	VSS	H1	NC
E2	DDRDQ8	F2	DDRDQ10	G2	VSS	H2	NC
E3	DDRDQ15	F3	DDRVREF1	G3	TEST1	H3	TEST2
E4	VDD18DDR	F4	VDD18DDR	G4	VSS	H4	TEST3
E5	VDD18DDR	F5	VDD12CORE	G5	VSS	H5	VDD12CORE
E6	VDD12CORE	F6	VSS	G6	VSS	H6	VSS
E7	VSS	F7	VSS	G7	VSS	H7	VSS
E8	VDD12CORE	F8	VSS	G8	VSS	H8	VSS
E9	VSS	F9	VSS	G9	VSS	H9	VSS
E10	VDD12CORE	F10	VSS	G10	VSS	H10	VSS
E11	VDD18DDR	F11	VDD12CORE	G11	VDD12CORE	H11	VSSVDAC
E12	VSSHDMI	F12	VSSHDMI	G12	VSSHDMI	H12	IREF
E13	VDD12HDMI	F13	VDD12HDMI	G13	VDD12HDMI	H13	VSSVDAC
E14	TX1P	F14	TX0P	G14	TXCP	H14	VDACR
E15	TX1N	F15	TX0N	G15	TXCN	H15	nVDACR
J1	NC	K1	I2CSDA1/ GPIO27	L1	USBDP	M1	VDD33USB
J2	NC	K2	I2CSDA0	L2	USBDM	M2	NC
J3	VSS	K3	I2CSCL1/ GPIO28	L3	VBUS_DET	M3	HPD
J4	NC	K4	I2CSCL0	L4	AUDIO_DIS/ GPIO30	M4	VDATAB4/VD3/GPIO20
J5	VSS	K5	VDD12CORE	L5	VDD33IO	M5	VDD33IO
J6	VSS	K6	VSS	L6	VDD12CORE	M6	VDD33IO
J7	VSS	K7	VSS	L7	VSS	M7	VDD33IO
J8	VSS	K8	VSS	L8	VDD12CORE	M8	VDATAG4/VD9/GPIO12
J9	VSS	K9	VSS	L9	VSS	M9	VDD33IO

TABLE 2-12: 225-LFBGA PACKAGE PIN ASSIGNMENTS (CONTINUED)

Pin Num	Pin Name	Pin Num	Pin Name	Pin Num	Pin Name	Pin Num	Pin Name
J10	VSS	K10	VSS	L10	VDD12CORE	M10	VDATAR5/ GPIO5
J11	VDD33VDAC	K11	VDACREF	L11	VDD33IO	M11	VDD33IO
J12	VDD33VDAC	K12	VDAC_HSYNC	L12	VDD33IO	M12	TDI
J13	VDD33VDAC	K13	VDAC_VSYNC	L13	WS/GPIO29	M13	INT
J14	VDACG	K14	VDACB	L14	MCLK/GPIO25	M14	EECS
J15	nVDACG	K15	nVDACB	L15	SPDIF/I2SDATA/GPIO26	M15	EECLK
N1	XI	P1	XO	R1	SYSPLLP		
N2	VDD12USBPLL	P2	SYSPLLG	R2	VDATAB7/VD0/GPIO23		
N3	USBRBIAS	P3	VDATAB6/VD1/GPIO22	R3	VDATAB5/VD2/GPIO21		
N4	VDATAB3/VD4/GPIO19	P4	VDATAB2/VD5/GPIO18	R4	VDATAB1/VD6/GPIO17		
N5	VDATAB0/ GPIO16	P5	HSYNC	R5	VSYNC		
N6	nBLANK	P6	nVCLK	R6	VCLK		
N7	VDATAG7/ GPIO15	P7	VDATAG6/VD7/ GPIO14	R7	VDATAG5/VD8/ GPIO13		
N8	VDATAG3/ GPIO11	P8	VDATAG2/ GPIO10	R8	VDATAG1/VD10/ GPIO9		
N9	VDATAG0/VD11/GPIO8	P9	VDATAR7/VD12/ GPIO7	R9	VDATAR6/ GPIO6		
N10	VDATAR4/VD13/GPIO4	P10	VDATAR3/VD14/GPIO3	R10	VDATAR2/VD15/GPIO2		
N11	VDATAR1/ GPIO1	P11	VDATAR0/ I2SCLKALT0/ GPIO0	R11	nTRST		
N12	TDO	P12	TCK	R12	TMS		
N13	nEXTRST	P13	nSW_MODE	R13	NC		
N14	NC	P14	nRESET	R14	LED/ I2SCLKALT1/ GPIO24		
N15	NC	P15	EEDI	R15	EEDO		

© 2010 - 2015 Microchip Technology Inc.

2.2 Buffer Types


TABLE 2-13: BUFFER TYPES

Buffer Type	Description
IS	Schmitt-triggered Input
O8	Output with 8mA sink and 8mA source
OD8	Open-drain output with 8mA sink
O12	Output with 12mA sink and 12mA source
OD12	Open-drain output with 12mA sink
PU	50uA (typical) internal pull-up. Unless otherwise noted in the pin description, internal pull-ups are always enabled. **Note:** Internal pull-up resistors prevent unconnected inputs from floating. Do not rely on internal resistors to drive signals external to the device. When connected to a load that must be pulled high, an external resistor must be added.
PD	50uA (typical) internal pull-down. Unless otherwise noted in the pin description, internal pull-downs are always enabled. **Note:** Internal pull-down resistors prevent unconnected inputs from floating. Do not rely on internal resistors to drive signals external to the device. When connected to a load that must be pulled low, an external resistor must be added.
AI	Analog input
AO	Analog output
AIO	Analog bi-directional
DDR2I	DDR2 input
DDR2O	DDR2 output
RGB	RGB output
ICLK	Crystal oscillator input pin
OCLK	Crystal oscillator output pin
P	Power pin

3.0 POWER CONNECTIONS

Figure 3-1 illustrates the power connections for UFX6000.

FIGURE 3-1: POWER CONNECTIONS

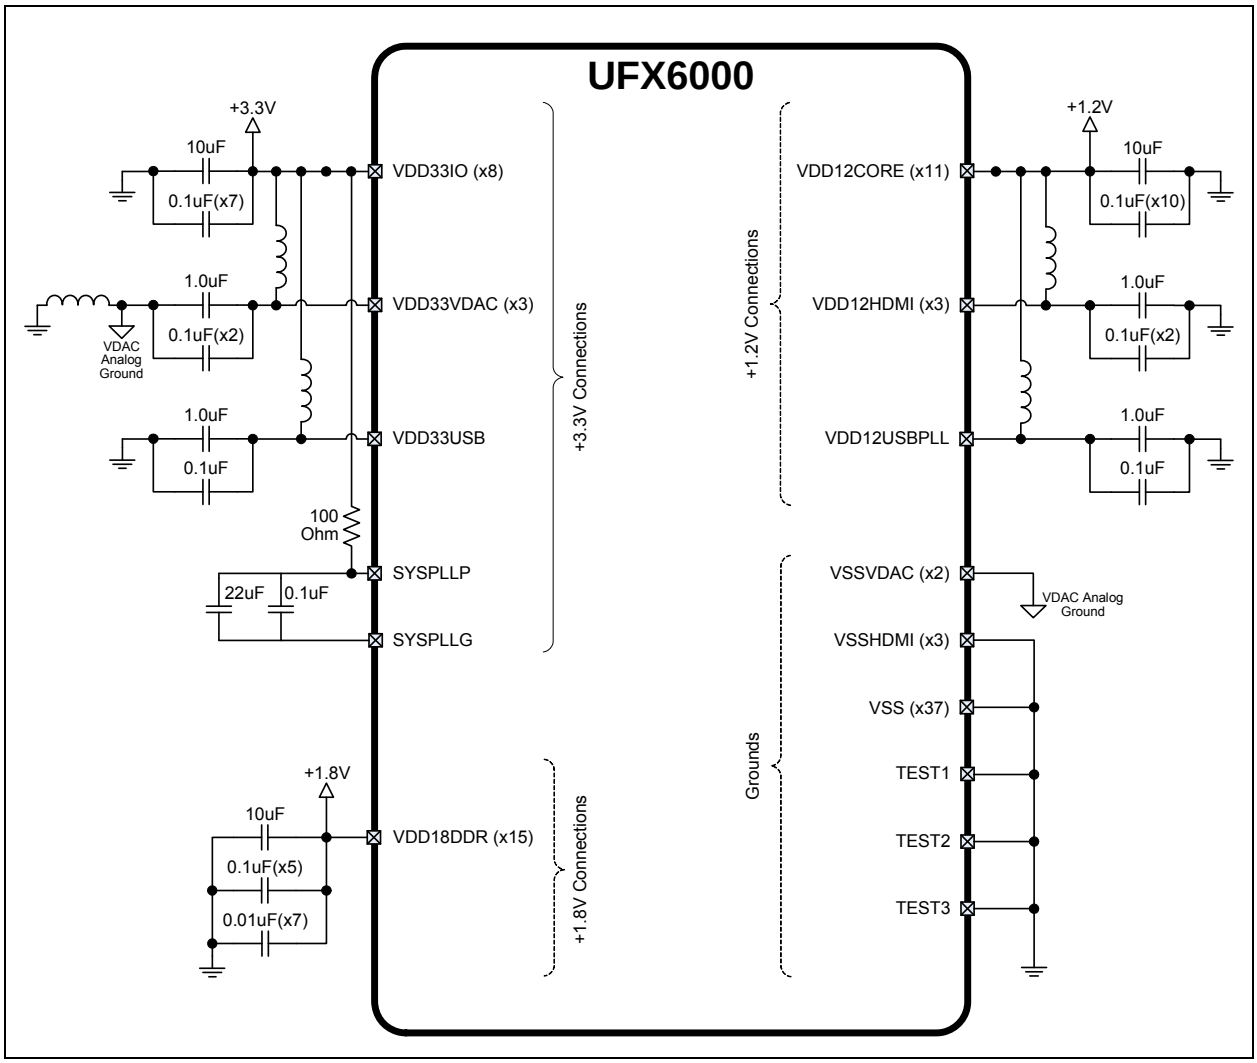

Note:	For additional power connection information, refer to the UFX6000 reference schematic.

© 2010 - 2015 Microchip Technology Inc.

4.0 EEPROM

UFX6000 uses an EEPROM to store the default values for the USB descriptors. It supports most Atmel 93C46x type of EEPROMs.

A 3-wire style 4K EEPROM that is organized for 256/512 x 8-bit operation must be used.

Various system level resets cause the EEPROM contents to be loaded into the UFX6000. After a reset, the EEPROM controller attempts to read the first byte of data from the EEPROM. If the value 0xA5 is read from the first address, then the EEPROM controller will assume that an external Serial EEPROM is present.

The EEPROM Controller will then load the entire contents of the EEPROM into an internal 512 byte SRAM. The contents of the SRAM are accessed by the device as needed (i.e., to fill Get Descriptor commands).

The UFX6000 may not respond to the USB host until the EEPROM loading sequence has completed. Therefore, after reset the USB PHY is kept in the disconnect state until the EEPROM load has completed.

The EEPROM Controller also allows the Host system to read, write and erase the contents of the Serial EEPROM.

4.1 EEPROM Format

Table 4-1 illustrates the format in which data is stored inside of the EEPROM.

Note the EEPROM offsets are given in units of 16-bit word offsets. A length field with a value of zero indicates that the field does not exist in the EEPROM. The UFX6000 will use the field's hardware default value in this case.

Note 1: For the device descriptor the only valid values for the length are 0 and 18.

2: For the configuration and interface descriptor, the only valid values for the length are 0 and 18.

3: For the BOS Block, the length varies and is dependent on block components.

4: For the SS Configuration Block, the only valid values for the length are 0 and 1Eh.

5: The EEPROM programmer must ensure that if a string descriptor does not exist in the EEPROM, the referencing descriptor must contain 00h for the respective string index field.

6: If all string descriptor lengths are zero, then a Language ID will not be supported.

7: All reserved EEPROM bits must be set to 0.

TABLE 4-1: EEPROM FORMAT

EEPROM Address	EEPROM Contents
00h	0xA5
01h	Full-Speed Polling Interval for Interrupt Endpoint
02h	Hi-Speed Polling Interval for Interrupt Endpoint
03h	RESERVED
04h	Configuration Flags 0 [7:0]
05h	Configuration Flags 0 [15:8]
06h	Configuration Flags 0 [23:16]
07h	Configuration Flags 0 [31:24]
08h - 13h	RESERVED
14h	Software Configuration Data Structure Length (bytes) Note 4-1
15h	Software Configuration Data Structure Word Offset Note 4-1
16h - 1Fh	RESERVED
20h	Enable bits for GPIOs [7:0] 0 = GPIO 1 = Default pin function

TABLE 4-1: EEPROM FORMAT (CONTINUED)

EEPROM Address	EEPROM Contents
21h	Enable bits for GPIOs [15:8] 0 = GPIO 1 = Default pin function
22h	Enable bits for GPIOs [23:16] 0 = GPIO 1 = Default pin function
23h	Enable bits for GPIOs [31:24] 0 = GPIO 1 = Default pin function
24h	Buffer type bits for GPIOs [7:0] 0 = Open-drain driver 1 = Push/pull driver
25h	Buffer type bits for GPIOs [15:8] 0 = Open-drain driver 1 = Push/pull driver
26h	Buffer type bits for GPIOs [23:16] 0 = Open-drain driver 1 = Push/pull driver
27h	Buffer type bits for GPIOs [31:24] 0 = Open-drain driver 1 = Push/pull driver
28h	Direction bits for GPIOs [7:0] 0 = Input 1 = Output
29h	Direction bits for GPIOs [15:8] 0 = Input 1 = Output
2Ah	Direction bits for GPIOs [23:16] 0 = Input 1 = Output
2Bh	Direction bits for GPIOs [31:24] 0 = Input 1 = Output
2Ch	Data bits for GPIOs [7:0] If GPIO is enabled as an output, the corresponding bit determines the signal level on the pin.
2Dh	Data bits for GPIOs [15:8] If GPIO is enabled as an output, the corresponding bit determines the signal level on the pin.
2Eh	Data bits for GPIOs [23:16] If GPIO is enabled as an output, the corresponding bit determines the signal level on the pin.
2Fh	Data bits for GPIOs [31:24] If GPIO is enabled as an output, the corresponding bit determines the signal level on the pin.
30h	Language ID [7:0]
31h	Language ID [15:8]
32h	Manufacturer ID String Descriptor Length (bytes)

© 2010 - 2015 Microchip Technology Inc.

TABLE 4-1: EEPROM FORMAT (CONTINUED)

EEPROM Address	EEPROM Contents
33h	Manufacturer ID String Descriptor EEPROM Word Offset
34h	Product Name String Descriptor Length (bytes)
35h	Product Name String Descriptor EEPROM Word Offset
36h	Serial Number String Descriptor Length (bytes)
37h	Serial Number String Descriptor EEPROM Word Offset
38h	Configuration String Descriptor Length (bytes)
39h	Configuration String Descriptor Word Offset
3Ah	Interface String Descriptor Length (bytes)
3Bh	Interface String Descriptor Word Offset
3Ch	Binary Object Store (BOS) Block Length (bytes) Note 4-2
3Dh	Binary Object Store (BOS) Block Word Offset
3Eh - 41h	RESERVED
42h	Hi-Speed Device Descriptor Length (bytes)
43h	HI-Speed Device Descriptor Word Offset
44h	Hi-Speed Configuration and Interface Descriptor Length (bytes)
45h	Hi-Speed Configuration and Interface Descriptor Word Offset
46h	Full-Speed Device Descriptor Length (bytes)
47h	Full-Speed Device Descriptor Word Offset
48h	Full-Speed Configuration and Interface Descriptor Length (bytes)
49h	Full-Speed Configuration and Interface Descriptor Word Offset

Note: Locations 4Ah and above may be used for any purpose.

Note 4-1 Refer to the software programming manual for information concerning this data structure.

Note 4-2 This block may include Binary Object Store (BOS) Descriptor, USB 2.0 Extension Descriptor, and Container ID Descriptor.

Table 4-2 describes Configuration Flags 0. If a configuration descriptor exists in the EEPROM, its values must agree with analogous values contained in the Configuration Flags 0. If they do not, unexpected results and untoward operation may occur.

TABLE 4-2: CONFIGURATION FLAGS 0

Bits	Description
31:13	**RESERVED**
12	**Port Swap** Swaps the mapping of the USBDP and USBDM pins. 0 = USBDP maps to the USB D+ line and USBDM maps to the USB D- line. 1 = USBDP maps to the USB D- line. USBDM maps to the USB D+ line.
11	**SW_MODE Polarity** This bit selects the polarity of the nSW_MODE pin. 0 = Active low 1 = Active high

TABLE 4-2: CONFIGURATION FLAGS 0 (CONTINUED)

Bits	Description
10	**LED Buffer Type** Specifies the LED output buffer type. 0 = open-drain driver 1 = push/pull driver
9	**LED Polarity** Indicates the polarity of the LED pin. 0 = Active low 1 = Active high
8	**LED Enable** 0 = LED disabled 1 = LED enabled
7	**Interrupt Pin Polarity** Indicates the polarity of the INT pin. 0 = Active low 1 = Active high
6	**External Reset Polarity** Determines the polarity of the external reset pin (nEXTRST) 0 = Active low 1 = Active high
5:4	**Squelch Threshold** Varies reference voltage levels for squelch and HS Disconnect. 00 = Default 01 = -25mV Change 10 = +25mV Change 11 = RESERVED
3	**LPM Enable** This bit enables the support of the Link Power Management (LPM) protocol. 0 = LPM not supported 1 = LPM supported.
2:1	**PHY Boost** This field provides the ability to boost the electrical drive strength of the HS output current to the upstream port. 00 = Normal electrical drive strength 01 = Elevated electrical drive strength (+4% boost) 10 = Elevated electrical drive strength (+8% boost) 11 = Elevated electrical drive strength (+12% boost)
0	**Power Method** This bit controls the device's USB power mode. 0 = The device is bus powered. 1 = The device is self powered.

Note: LPM Enable and Power method specified in Configuration Flags 0 must agree with analogous quantities specified in descriptors. If they do not, unexpected results and untoward operation may occur.

© 2010 - 2015 Microchip Technology Inc.

4.2 EEPROM Defaults

The signature value of 0xA5 is stored at address 0. A different signature value indicates to the EEPROM controller that no EEPROM is attached to the device. In this case, the hardware default values used are as shown in Table 4-3.

TABLE 4-3: EEPROM DEFAULTS

Field	Default Value
Full-Speed Polling Interval	01h
Hi-Speed Polling Interval	04h
Maximum Burst Size for Bulk-Out Endpoint	07h
Configuration Flags 0	00000008h
Maximum Power	Note 4-3
Vendor ID	0424h
Product ID	9D01h

Note 4-3 Default value is FAh (500mA)

4.3 EEPROM Auto-Load

Certain system level resets (POR, nRESET, and Software Reset) cause the EEPROM contents to be loaded into the device. After a reset, the EEPROM controller attempts to read the first byte of data from the EEPROM. If the value 0xA5 is read from the first address, then the EEPROM controller will assume that an external Serial EEPROM is present.

4.4 Customized Operation Without EEPROM

The device provides the capability to customize operation without the use of an EEPROM. Descriptor information and initialization quantities normally fetched from EEPROM and used to initialize descriptors and elements of the Control and Status Registers may be specified via proprietary vendor commands over the USB bus.

© 2010 - 2015 Microchip Technology Inc.

5.0 OPERATIONAL CHARACTERISTICS

5.1 Absolute Maximum Ratings*

+3.3V Supply Voltage (VDD33IO, VDD33USB, VDD33VDAC, SYSPLLP) (Note 5-1) ..... 0V to +3.6V

+1.8V Supply Voltage (VDD18DDR) (Note 5-1) ..... 0V to +1.9V

+1.2V Supply Voltage (VDD12CORE, VDD12USBPLL, VDD12HDMI) (Note 5-1) ..... 0V to +1.32V

Positive voltage on XI, with respect to ground ..... +4.6V

Positive voltage on XO, with respect to ground ..... +2.5V

Storage Temperature ..... -55°C to +150°C

Lead Temperature Range ..... Refer to JEDEC Spec. J-STD-020

HBM ESD Performance ..... JEDEC Class 2

Note 5-1 When powering this device from laboratory or system power supplies, it is important that the absolute maximum ratings not be exceeded or device failure can result. Some power supplies exhibit voltage spikes on their outputs when AC power is switched on or off. In addition, voltage transients on the AC power line may appear on the DC output. If this possibility exists, it is suggested that a clamp circuit be used.

*Stresses exceeding those listed in this section could cause permanent damage to the device. This is a stress rating only. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Functional operation of the device at any condition exceeding those indicated in Section 5.2, "Operating Conditions**", Section 5.5, "DC Specifications", or any other applicable section of this specification is not implied. Note, device signals are *NOT* 5 volt tolerant unless specified otherwise.

5.2 Operating Conditions**

+3.3V Supply Voltage (VDD33IO, VDD33USB, VDD33VDAC, SYSPLLP) ..... +3.3V +/- 5%

+1.8V Supply Voltage (VDD18DDR) ..... +1.8V +/- 5%

+1.2V Supply Voltage (VDD12CORE, VDD12USBPLL, VDD12HDMI) ..... +1.2V +/- 5%

Ambient Operating Temperature in Still Air (T_A) ..... 0°C to +70°C

Maximum Junction Temperature ..... +110°C

**Proper operation of the device is guaranteed only within the ranges specified in this section.

5.3 Package Thermal Specifications

TABLE 5-1: PACKAGE THERMAL PARAMETERS

Parameter	Symbol	Value	Units	Comments
Thermal Resistance	Θ_{JA}	28.7	°C/W	Measured in still air from the die to ambient air
Thermal Resistance	Θ_{JC}	10.4	°C/W	Measured from the die to the case
Junction-to-Top-of-Package	Ψ_{JT}	0.38	°C/W	Measured in still air

Note: Thermal parameters are measured or estimated for devices in a multi-layer 2S2P PCB per JESD51.

© 2010 - 2015 Microchip Technology Inc.

5.4 Current Consumption

This section details the current consumption of the device as measured during various modes of operation and power states. Current consumption values are provided for each power rail (+3.3V, +1.8V, +1.2V). Power dissipation is determined by temperature, supply voltage, and external source/sink requirements.

Note:	All current consumption values were measured with power supplies at nominal voltages unless otherwise noted.

5.4.1 SUSPEND POWER STATE

TABLE 5-2: SUSPEND SUPPLY CURRENT

Parameter	Typical	Unit
+3.3V Supply Current (Device Only) (VDD33IO, VDD33USB, VDD33VDAC, SYSPLLP)	0.7	mA
+1.8V Supply Current (Device Only) (VDD18DDR)	0.0	mA
+1.2V Supply Current (Device Only) (VDD12CORE, VDD12USBPLL, VDD12HDMI)	1.5	mA

5.4.2 OPERATIONAL

5.4.2.1 High-Speed

TABLE 5-3: TYPICAL HIGH-SPEED OPERATIONAL SUPPLY CURRENT (MA)

Parameter	Static Image			Full Screen Video		
	1280X1024 (DDR2-667)	1600X1200 (DDR2-667)	1920X1200 (DDR2-667)	1280X1024 (DDR2-667)	1600X1200 (DDR2-667)	1920X1200 (DDR2-667)
Video DAC Interface Enabled						
+3.3V Supply Current (Dev. Only) (VDD33IO, VDD33USB, VDD33VDAC, SYSPLLP)	77	78	79	78	78	79
+1.8V Supply Current (Dev. Only) (VDD18DDR)	39	45	48	58	67	75
+1.2V Supply Current (Dev. Only) (VDD12CORE, VDD12USBPLL, VDD12HDMI)	181	189	192	203	215	222
HDMI Interface Enabled (with audio)						
+3.3V Supply Current (Dev. Only) (VDD33IO, VDD33USB, VDD33VDAC, SYSPLLP)	5.0	5.0	5.0	5.2	5.2	5.2
+1.8V Supply Current (Dev. Only) (VDD18DDR)	39	45	49	60	67	76
+1.2V Supply Current (Dev. Only) (VDD12CORE, VDD12USBPLL, VDD12HDMI)	201	218	218	223	242	255

5.5 DC Specifications

TABLE 5-4: I/O BUFFER CHARACTERISTICS

Parameter	Symbol	MIN	TYP	MAX	Units	Notes
IS Type Input Buffer						
Low Input Level	V_{ILI}	-0.3			V	
High Input Level	V_{IHI}			3.6	V	
Negative-Going Threshold	V_{ILT}	1.01	1.19	1.39	V	Schmitt trigger
Positive-Going Threshold	V_{IHT}	1.39	1.59	1.8	V	Schmitt trigger
SchmittTrigger Hysteresis (V_{IHT} - V_{ILT})	V_{HYS}	336	399	485	mV	
O8 Type Output Buffer						
Low Output Level	V_{OL}			0.4	V	I_{OL} = 8mA
High Output Level	V_{OH}	VDD33IO - 0.4			V	I_{OH} = -8mA
OD8 Type Output Buffer						
Low Output Level	V_{OL}			0.4	V	I_{OL} = 8mA
RGB Type Output Buffer						
Low Output Level	V_{OL}			0.4	V	I_{OL} = 8mA
High Output Level	V_{OH}	VDD33IO - 0.4			V	I_{OH} = -8mA
DDR2I Type Input Buffer						Note 5-2
Termination Voltage	V_{TT}	V_{REF} - 0.04	V_{REF}	V_{REF} + 0.04	V	Note 5-3
Low Input Level (DC)	$V_{IL(dc)}$	-0.3		V_{REF} - 0.125	V	Note 5-3
High Input Level (DC)	$V_{IH(dc)}$	V_{REF} + 0.125		VDD18DDR + 0.3	V	Note 5-3
Low Input Level (AC)	$V_{IL(ac)}$			V_{REF} - 0.25	V	Note 5-3
High Input Level (AC)	$V_{IH(ac)}$	V_{REF} + 0.25			V	Note 5-3
DDR2O Type Output Buffer						Note 5-2
Termination Voltage	V_{TT}	V_{REF} - 0.04	V_{REF}	V_{REF} + 0.04	V	Note 5-3
Low Output Level (DC)	$V_{OL(dc)}$			0.28	V	Note 5-4
High Output Level (DC)	$V_{OH(dc)}$	VDD18DDR(min) - 0.2			V	Note 5-5
Low Output Level (AC)	$V_{OL(ac)}$			V_{TTmin} - 0.603	V	Note 5-4
High Output Level (AC)	$V_{OH(ac)}$	V_{TTmax} + 0.603			V	Note 5-5
ICLK Type Buffer (XI Input)						Note 5-6
Low Input Level	V_{ILI}	-0.3		0.5	V	
High Input Level	V_{IHI}	1.08		1.32	V	

Note 5-2 All values apply to both full-strength and half-strength operation unless otherwise stated.

Note 5-3 V_{REF} equals DDRVREF[0:2].

Note 5-4 I_{OL} equals 13.4mA for full-strength operation and 6.7mA for half-strength operation.

Note 5-5 I_{OH} equals -13.4mA for full-strength operation and -6.7mA for half-strength operation.

Note 5-6 XI can optionally be driven from a 25MHz single-ended clock oscillator.

© 2010 - 2015 Microchip Technology Inc.

TABLE 5-5: VIDEO DAC - DC CHARACTERISTICS

Parameter	Symbol	MIN	TYP	MAX	Units
Output Voltage	-		1.28		V
Output Current per Channel	-		17		mA
Video DAC Resolution	-		10		bits
Integral Non-linearity Error	INL			+/-2	LSB
Differential Non-linearity Error	DNL			+/-0.5	LSB

5.6 AC Specifications

This section details the various AC timing specifications of the device.

Note 1: The USB interface timing adheres to the USB 2.0 Specification. Refer to the Universal Serial Bus Revision 2.0 Specification for detailed USB timing information.

2: The DDR2 interface timing adheres to the JESD79-2E Specification. Refer to the JESD79-2E Specification for detailed DDR2 timing information.

3: The HDMI interface timing adheres to the HDMI 1.3 Specification. Refer to the HDMI 1.3 Specification for detailed HDMI timing information.

4: The S/PDIF interface timing adheres to the IEC 60958 2-channel PCM Specification. Refer to the IEC 60958 2-channel PCM Specification for detailed S/PDIF timing information.

5: The I^2S interface timing adheres to the NXP I^2S Bus Specification. Refer to the NXP I^2S Bus Specification for detailed I^2S timing information.

6: The I^2C interface timing adheres to the NXP I^2C-Bus Specification. Refer to the I^2C-Bus Specification for detailed I^2C timing information.

5.6.1 POWER SEQUENCE TIMING

Power supplies must adhere to the following rules:

- All power supplies of the same voltage must be powered up/down together.
- There is no power-up sequencing requirement, however all power supplies must reach operational levels within the time periods specified in Table 5-6.
- There is no power-down sequencing or timing requirement, however the device must not be powered for an extended period of time without all supplies at operational levels.
- Following power-on, or if a power supply brownout occurs (i.e., one or more supplies drops below operational limits), a power-on reset must be executed once all power supplies reach operational levels. Refer to section Section 5.6.2, "Power-On Reset Timing," on page 32 for power-on reset requirements.
- With the exception of HPD, VBUS_DET, I2CSDA[0:1], and I2CSCL[0:1], do not drive input signals without power supplied to the device.

Note 1: Violation of these specifications may damage the device.

2: Power sequencing requirements are preliminary and subject to change.

FIGURE 5-1: POWER-ON TIMING

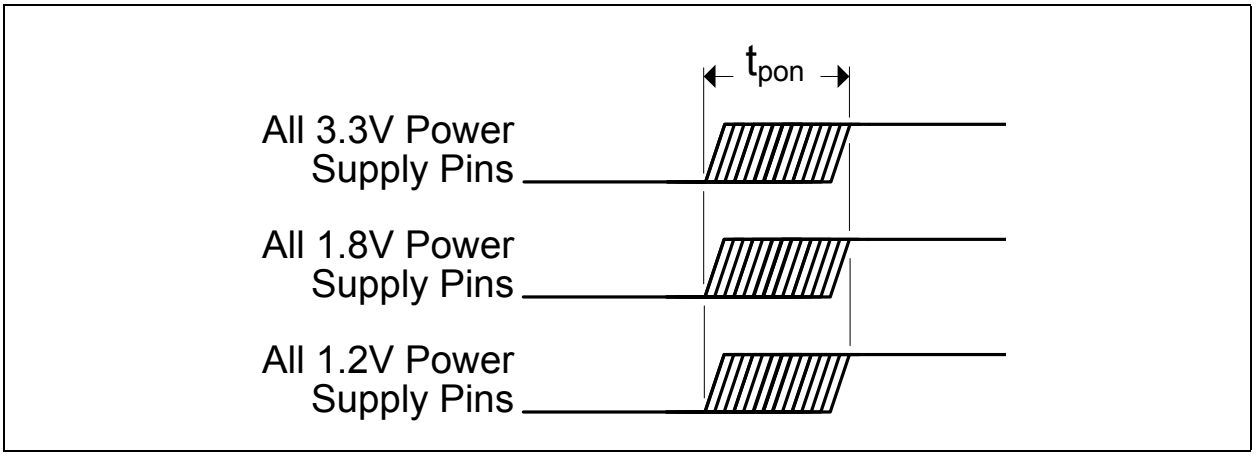


TABLE 5-6: POWER-ON TIMING VALUES

Symbol	Description	MIN	TYP	MAX	Units
t_{pon}	Power supply turn on time	0		25	mS

5.6.2 POWER-ON RESET TIMING

This diagram illustrates the nRESET timing requirements in relation to power-on. A hardware reset (nRESET assertion) is required following power-up. For proper operation, nRESET must be asserted for no less than t_{rstia}. The nRESET pin can be asserted at any time, but must not be deasserted before t_{purstd} after all external power supplies have reached operational levels.

FIGURE 5-2: NRESET POWER-ON TIMING

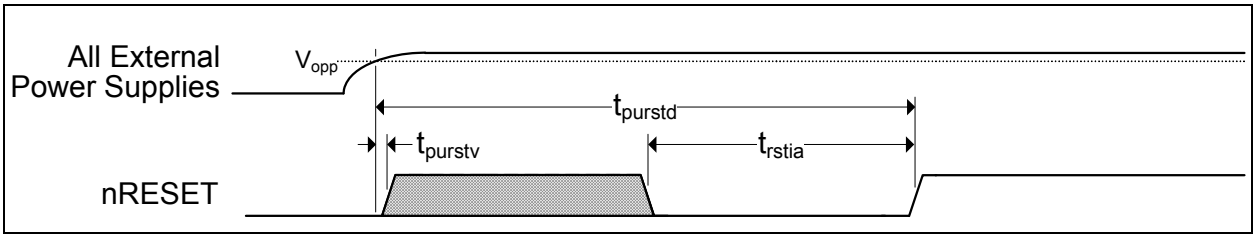


TABLE 5-7: NRESET POWER-ON TIMING VALUES

Symbol	Description	MIN	TYP	MAX	Units
t_{purstd}	External power supplies at operational levels to nRESET deassertion	25	Note 5-7		mS
t_{purstv}	External power supplies at operational levels to nRESET valid	0			nS
t_{rstia}	nRESET input assertion time	100			µS

Note: nRESET deassertion must be monotonic.

Note 5-7 For bus-powered applications, a typical value of 200 mS is recommended to allow time for connector mating. Permanently attached and/or self-powered applications do not require this longer reset time.

© 2010 - 2015 Microchip Technology Inc.

5.6.3 RESET TIMING

Figure 5-3 illustrates the nRESET pin timing requirements. When used, nRESET must be asserted for no less than t_{rstia}.

Note:	A hardware reset (nRESET assertion) is required following power-on. Refer to Section 5.6.2, "Power-On Reset Timing," on page 32 for additional information.

FIGURE 5-3: NRESET TIMING

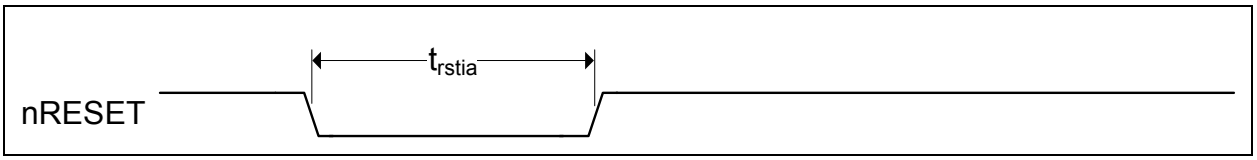


TABLE 5-8: NRESET TIMING VALUES

Symbol	Description	MIN	TYP	MAX	Units
t_{rstia}	nRESET input assertion time	1			uS

5.6.4 VIDEO DAC TIMING

The following table specifies the Video DAC timing characteristics for the device. All values are measured with the Video DAC in 17mA full scale mode.

TABLE 5-9: VIDEO DAC - AC CHARACTERISTICS

Parameter	MIN	TYP	MAX	Units
Frequency	25		200	MHz
Analog Output Delay	0.4	0.5	0.8	nS
Analog Output Rise Time		0.31		nS
Analog Output Fall Time		0.5		nS
Analog Output Settling Time		0.7		nS

© 2010 - 2015 Microchip Technology Inc.

5.6.5 DIGITAL RGB TIMING

The following sub-sections specify the Digital RGB timing requirements for the device in DDR and SDR modes of operation.

5.6.5.1 DDR Mode

FIGURE 5-4: DIGITAL RGB TIMING - DDR MODE

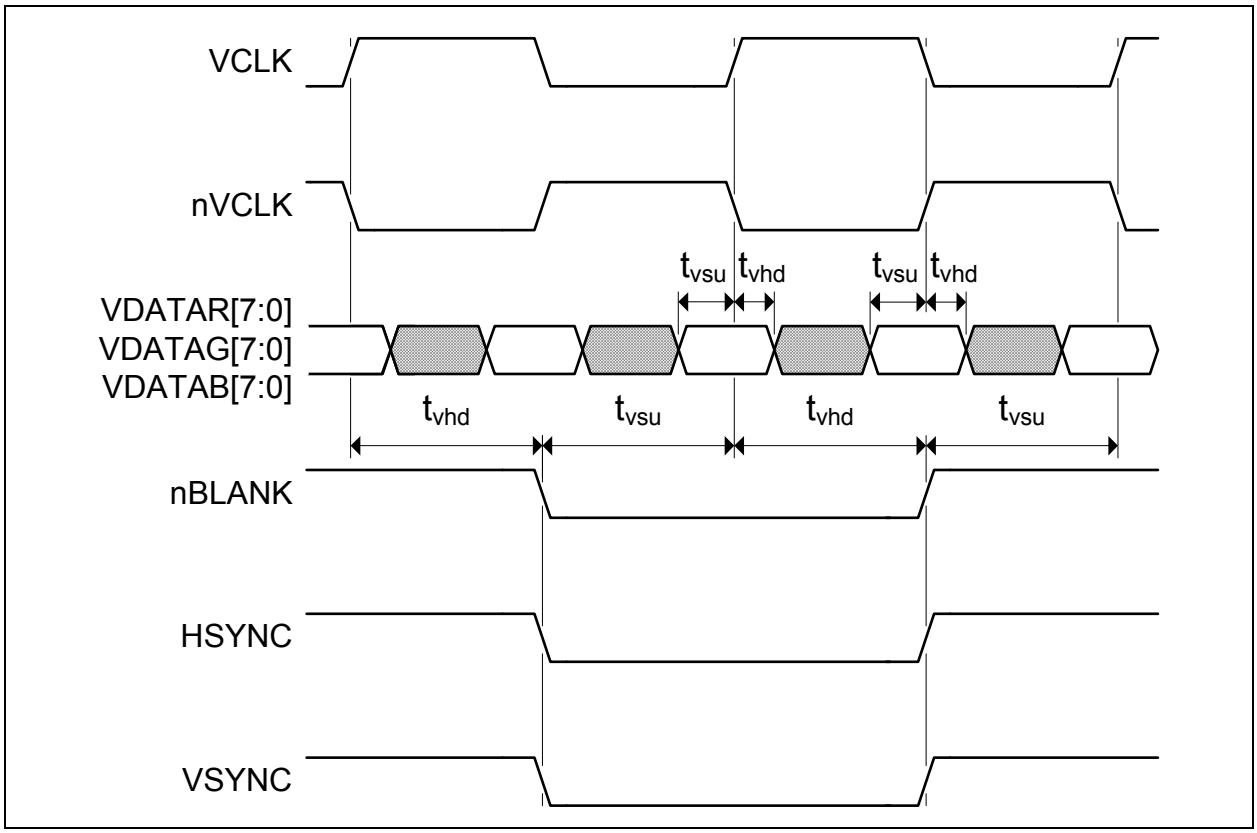


TABLE 5-10: DIGITAL RGB TIMING VALUES - DDR MODE

Symbol	Description	MIN	TYP	MAX	Units
f_{vclk}	VCLK Frequency			165	MHz
t_{vsu}	Video Setup Output Delay	0.8			nS
t_{vhd}	Video Hold Output Delay	0.5			nS

Note: RGB timing values are with respect to an equivalent test load of 5 pF.

© 2010 - 2015 Microchip Technology Inc.

5.6.5.2 SDR Mode

FIGURE 5-5: DIGITAL RGB TIMING - SDR MODE

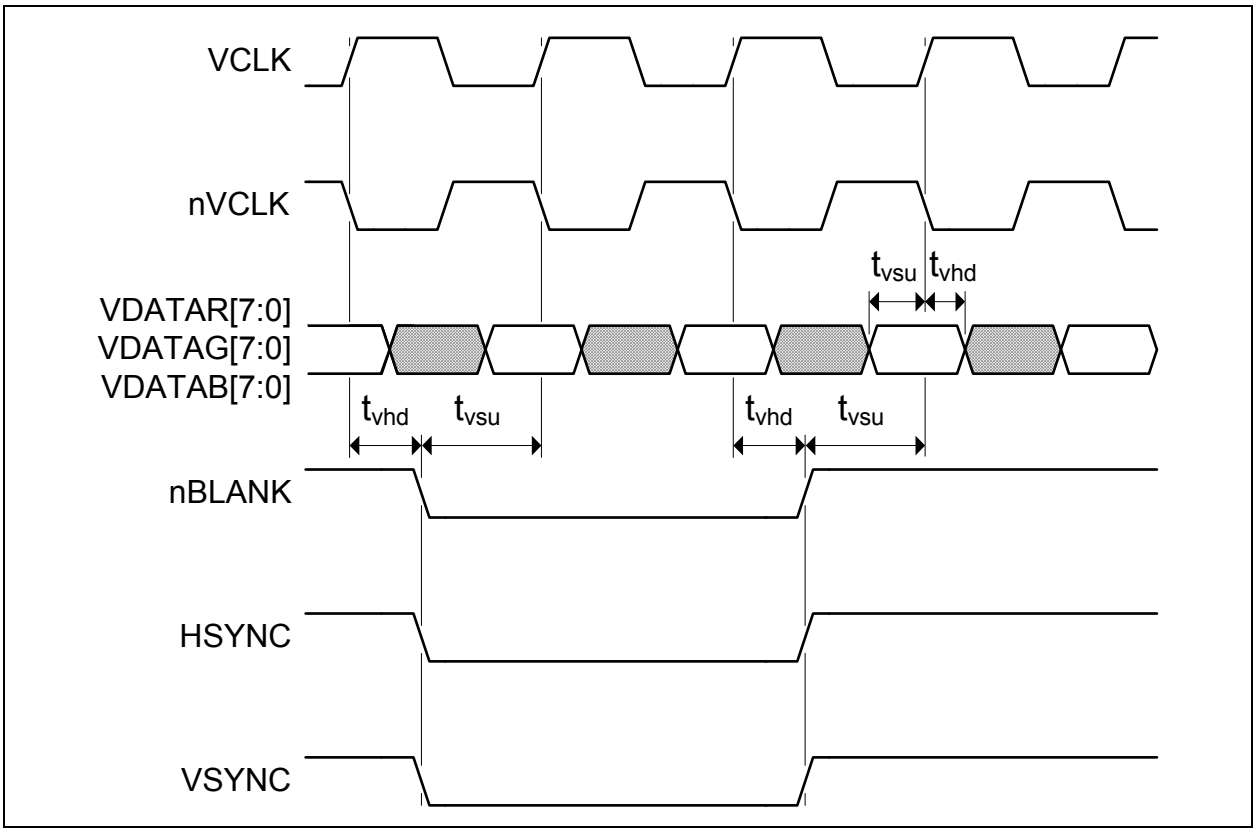


TABLE 5-11: DIGITAL RGB TIMING VALUES - SDR MODE

Symbol	Description	MIN	TYP	MAX	Units
f_{vclk}	VCLK Frequency			165	MHz
t_{vsu}	Video Setup Output Delay	2.5			nS
t_{vhd}	Video Hold Output Delay	1.5			nS

Note: RGB timing values are with respect to an equivalent test load of 5 pF.

5.6.6 EEPROM TIMING

The following specifies the EEPROM timing requirements for the device:

FIGURE 5-6: EEPROM TIMING

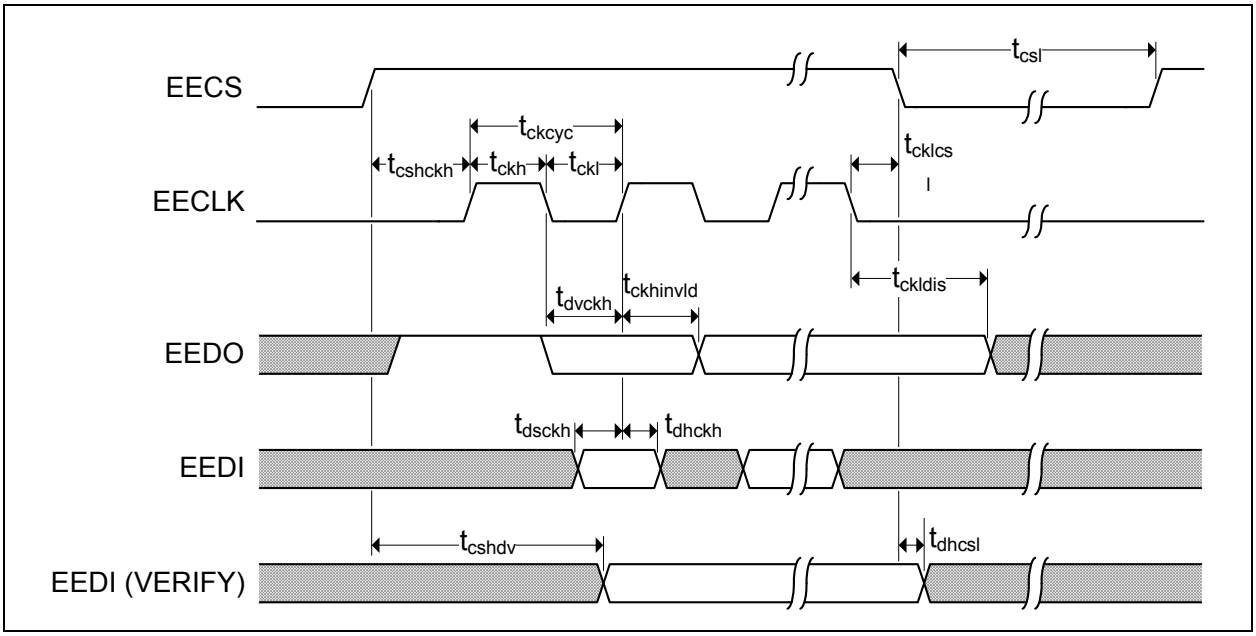


TABLE 5-12: EEPROM TIMING VALUES

Symbol	Description	MIN	TYP	MAX	Units
t_{ckcyc}	EECLK Cycle time	1110		1130	ns
t_{ckh}	EECLK High time	550		570	ns
t_{ckl}	EECLK Low time	550		570	ns
t_{cshckh}	EECS high before rising edge of EECLK	1070			ns
t_{cklcsl}	EECLK falling edge to EECS low	30			ns
t_{dvckh}	EEDO valid before rising edge of EECLK	550			ns
$t_{ckhinvld}$	EEDO invalid after rising edge EECLK	550			ns
t_{dsckh}	EEDI setup to rising edge of EECLK	90			ns
t_{dhckh}	EEDI hold after rising edge of EECLK	0			ns
t_{ckldis}	EECLK low to data disable (OUTPUT)	580			ns
t_{cshdv}	EEDIO valid after EECS high (VERIFY)			600	ns
t_{dhcsl}	EEDIO hold after EECS low (VERIFY)	0			ns
t_{csl}	EECS low	1070			ns

Note: EEPROM timing values are with respect to an equivalent test load of 25 pF.

© 2010 - 2015 Microchip Technology Inc.

5.6.7 JTAG TIMING

This section specifies the JTAG timing of the device.

FIGURE 5-7: JTAG TIMING

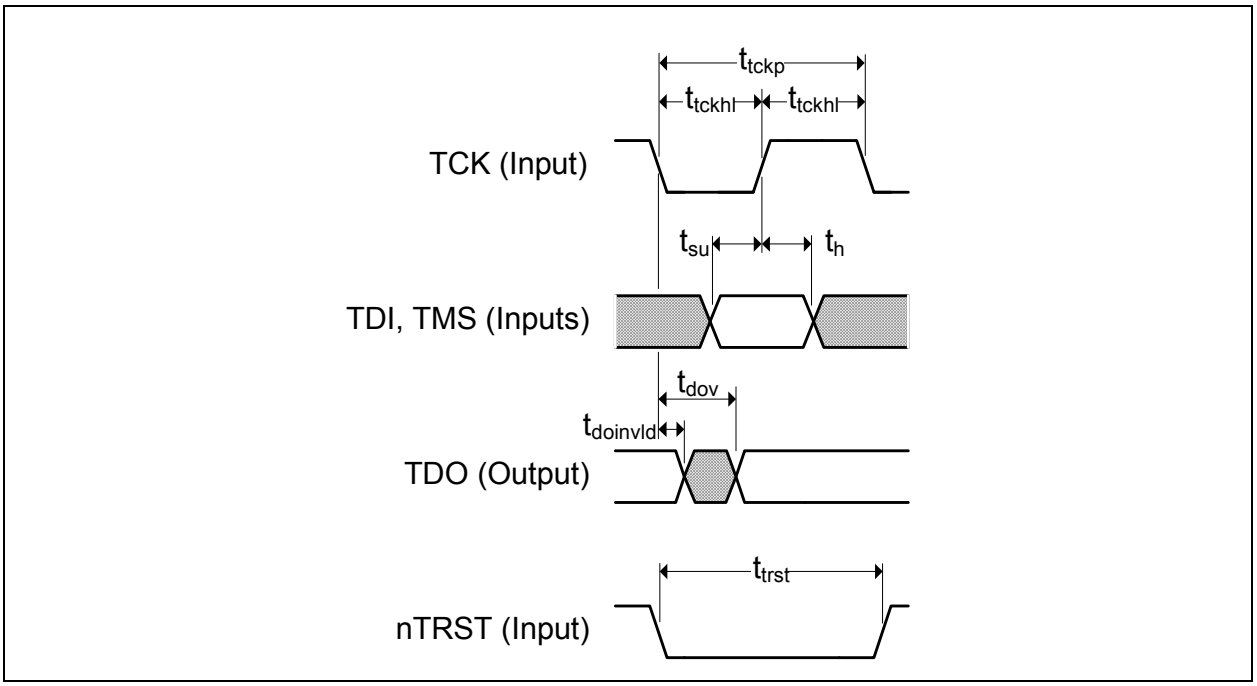


TABLE 5-13: JTAG TIMING VALUES

Symbol	Description	MIN	TYP	MAX	Units
t_{tckp}	TCK clock period	66.67	80	nS	
t_{tckhl}	TCK clock high/low time	t_{tckp}*0.4	t_{tckp}*0.6	nS	
t_{su}	TDI, TMS setup to TCK rising edge	10		nS	
t_h	TDI, TMS hold from TCK rising edge	10		nS	
t_{dov}	TDO output valid from TCK falling edge		16	nS	
$t_{doinvld}$	TDO output invalid from TCK falling edge	0		nS	
t_{trst}	nTRST assertion time	10		mS	

Note: JTAG timing values are with respect to an equivalent test load of 25 pF

5.7 Clock Circuit

The device can accept either a 25MHz crystal or a 25MHz single-ended clock oscillator (+/- 50ppm) input. If the single-ended clock oscillator method is implemented, XO should be left unconnected and XI should be driven with a nominal 0-1.2V clock signal. The input clock duty cycle is 40% minimum, 50% typical and 60% maximum.

It is recommended that a crystal utilizing matching parallel load capacitors be used for the crystal input/output signals (XI/XO). See Table 5-14 for the recommended crystal specifications.

TABLE 5-14: CRYSTAL SPECIFICATIONS

Parameter	Symbol	MIN	NOM	MAX	Units	Notes
Crystal Cut	AT, typ					
Crystal Oscillation Mode	Fundamental Mode					
Crystal Calibration Mode	Parallel Resonant Mode					
Frequency	F_{fund}	-	25.000	-	MHz	
Frequency Tolerance @ 25°C	F_{tol}	-	-	+/-50	PPM	Note 5-8
Frequency Stability Over Temp	F_{temp}	-	-	+/-100	PPM	Note 5-8
Frequency Deviation Over Time	F_{age}	-	+/-3 to 5	-	PPM	Note 5-9
Total Allowable PPM Budget		-	-	+/-150	PPM	
Shunt Capacitance	C_O	-	7 typ	-	pF	
Load Capacitance	C_L	-	20 typ	-	pF	
Drive Level	P_W	300	-	-	uW	
Equivalent Series Resistance	R_1	-	-	50	Ohm	
Operating Temperature Range		0	-	70	°C	
XI Pin Capacitance		-	3 typ	-	pF	Note 5-10
XO Pin Capacitance		-	3 typ	-	pF	Note 5-10

Note 5-8 The maximum allowable values for Frequency Tolerance and Frequency Stability are application dependant.


Note 5-9 Frequency Deviation Over Time is also referred to as Aging.

Note 5-10 This number includes the pad, the bond wire and the lead frame. PCB capacitance is not included in this value. The XO/XI pin and PCB capacitance values are required to accurately calculate the value of the two external load capacitors. These two external load capacitors determine the accuracy of the 25.000 MHz frequency.

© 2010 - 2015 Microchip Technology Inc.

6.0 PACKAGE OUTLINE

FIGURE 6-1: 225-LFBGA PACKAGE DEFINITION

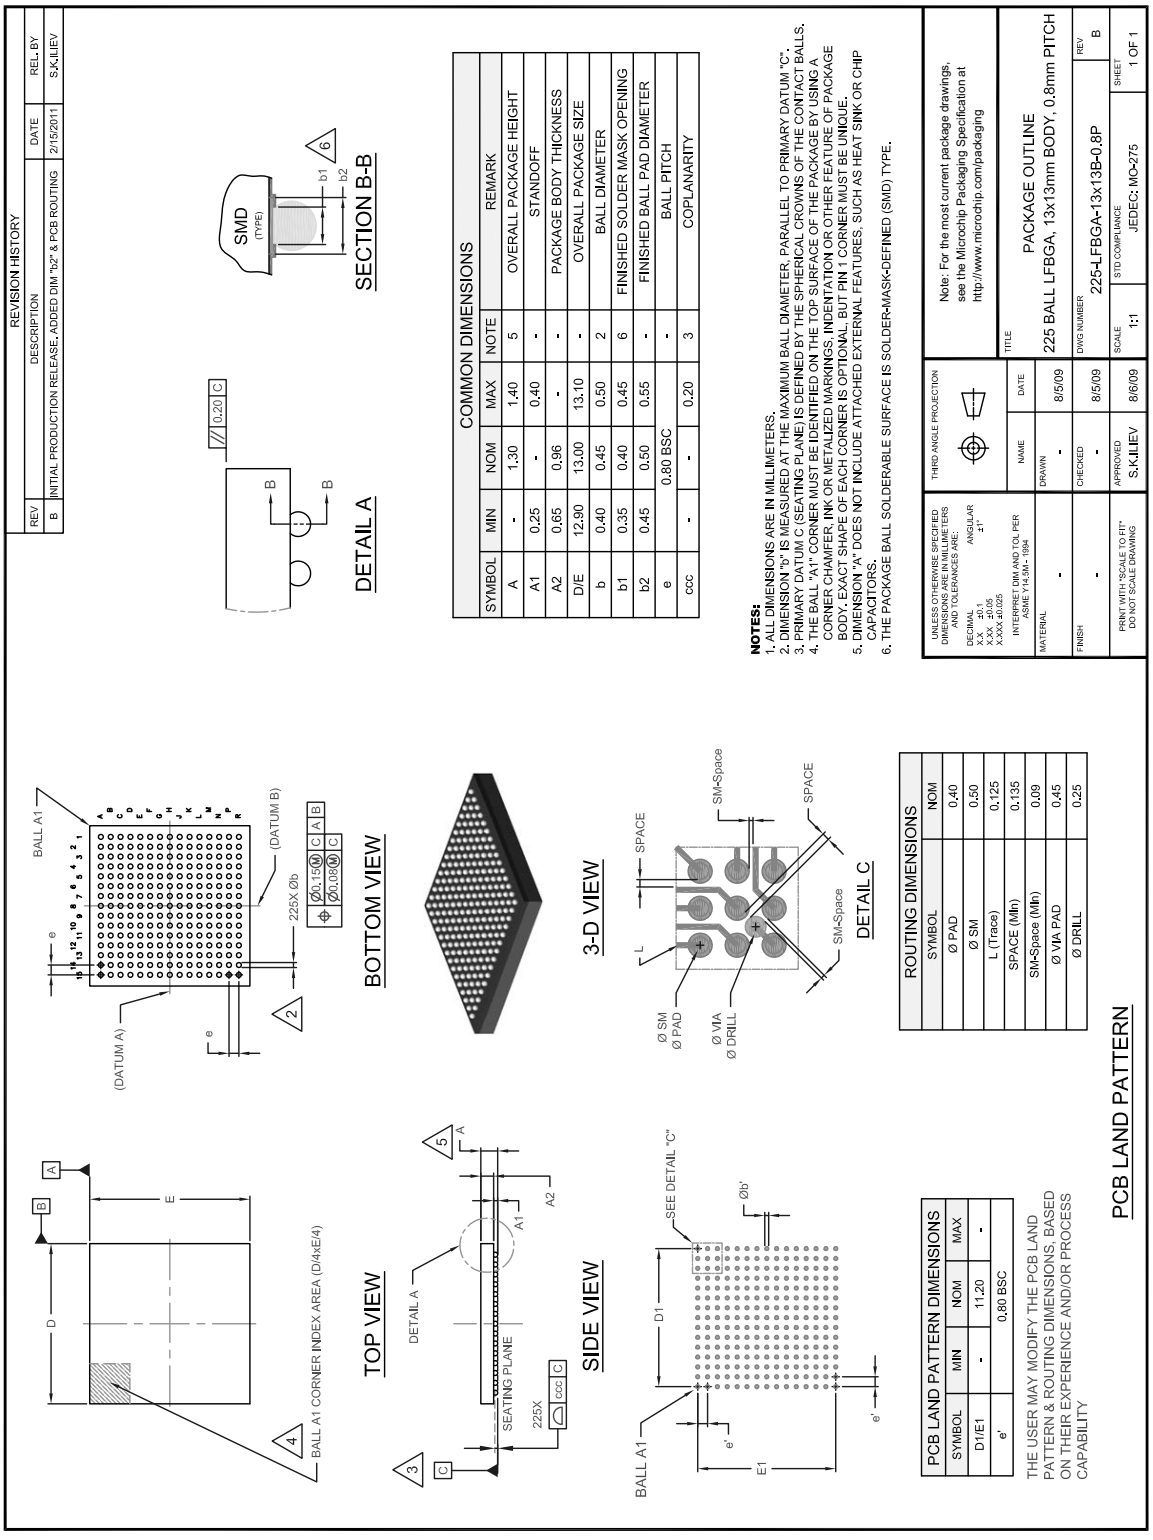

APPENDIX A: DATA SHEET REVISION HISTORY

TABLE A-1: REVISION HISTORY

Revision Level & Date	Section/Figure/Entry	Correction
DS00001883A (02-10-15)	Replaces previous SMSC version Rev. 1.4 (06-24-13) Reel size is changed to 1,500 pieces.	
Rev. 1.4 (06-24-13)	Table 5-4, “I/O Buffer Characteristics,” on page 30	Updated ICLK buffer VIHI values.
	Section 5.7, "Clock Circuit," on page 38	Updated sentence “...XI should be driven with a nominal 0-3.3V clock signal.” to “...XI should be driven with a nominal 0-1.2V clock signal”.
Rev. 1.3 (09-27-12)	Table 2-2, “Digital RGB Pins,” on page 7 and Table 2-9, “Miscellaneous Pins,” on page 16	Added note to Buffer Type column of all GPIO pin descriptions: “The internal pull-up is disabled when the GPIO is configured as an O8 buffer type.”
	Table 2-9, “Miscellaneous Pins,” on page 16	Added note to SPDIF pin “Usage of SPDIF requires the MCLK audio input master clock pin.”
Rev. 1.2 (09-16-11)	Section 5.4.2, "Operational," on page 29	Added final power numbers.
	Section 6.0, "Package Outline," on page 39	Updated package drawings & specifications.
Rev. 1.1 (05-13-11)	Section 5.2, "Operating Conditions**," on page 28	+3.3V, +1.8V, and +1.2V power supply operating ranges updated to +/-5%. Junction temperature updated to show maximum only.
	Table 2-1, “USB Pins,” on page 7, Table 2-2, “Digital RGB Pins,” on page 7, Note 5-6 on page 30, and Section 5.7, "Clock Circuit," on page 38	Added note regarding not using a crystal in Digital RGB mode: “A 25Mhz oscillator, or other single ended clock source that meets the specifications in Sections 5.5 and 5.7, is required when utilizing the Digital RGB interface. Do not use a crystal when operating in Digital RGB mode.”
Rev. 1.0 (12-16-10)	All	Initial Release

© 2010 - 2015 Microchip Technology Inc.

THE MICROCHIP WEB SITE

Microchip provides online support via our WWW site at www.microchip.com. This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at www.microchip.com. Under "Support", click on "Customer Change Notification" and follow the registration instructions.

CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the web site at: http://www.microchip.com/support

© 2010 - 2015 Microchip Technology Inc.

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

PART NO.	-	XXX	-	[X]
Device		Package		Tape and Reel Option

Device:	UFX6000		
Package:	VE	=	225-ball LFBGA
Tape and Reel Option:	Blank	=	Tray packaging
	TR	=	Tape and Reel (1)

Examples:

a) UFX6000-VE = 225-ball LFBGA
RoHS Compliant Package
0 to +70° C Temp Range

Note 1: Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option. Reel size is 1,500 pieces.

© 2010 - 2015 Microchip Technology Inc.

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE**.** Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

Trademarks

The Microchip name and logo, the Microchip logo, dsPIC, FlashFlex, flexPWR, JukeBlox, KEELOQ, KEELOQ logo, Kleer, LANCheck, MediaLB, MOST, MOST logo, MPLAB, OptoLyzer, PIC, PICSTART, PIC^{32} logo, RightTouch, SpyNIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

The Embedded Control Solutions Company and mTouch are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, ECAN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, KleerNet, KleerNet logo, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, RightTouch logo, REAL ICE, SQI, Serial Quad I/O, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademarks of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2010 - 2015, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 9781632769893

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
═ ISO/TS 16949 ═

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
http://www.microchip.com/support
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Cleveland
Independence, OH
Tel: 216-447-0464
Fax: 216-447-0643

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110

Canada - Toronto
Tel: 905-673-0699
Fax: 905-673-6509

ASIA/PACIFIC

Asia Pacific Office
Suites 3707-14, 37th Floor
Tower 6, The Gateway
Harbour City, Kowloon
Hong Kong
Tel: 852-2943-5100
Fax: 852-2401-3431

Australia - Sydney
Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing
Tel: 86-10-8569-7000
Fax: 86-10-8528-2104

China - Chengdu
Tel: 86-28-8665-5511
Fax: 86-28-8665-7889

China - Chongqing
Tel: 86-23-8980-9588
Fax: 86-23-8980-9500

China - Dongguan
Tel: 86-769-8702-9880

China - Hangzhou
Tel: 86-571-8792-8115
Fax: 86-571-8792-8116

China - Hong Kong SAR
Tel: 852-2943-5100
Fax: 852-2401-3431

China - Nanjing
Tel: 86-25-8473-2460
Fax: 86-25-8473-2470

China - Qingdao
Tel: 86-532-8502-7355
Fax: 86-532-8502-7205

China - Shanghai
Tel: 86-21-5407-5533
Fax: 86-21-5407-5066

China - Shenyang
Tel: 86-24-2334-2829
Fax: 86-24-2334-2393

China - Shenzhen
Tel: 86-755-8864-2200
Fax: 86-755-8203-1760

China - Wuhan
Tel: 86-27-5980-5300
Fax: 86-27-5980-5118

China - Xian
Tel: 86-29-8833-7252
Fax: 86-29-8833-7256

ASIA/PACIFIC

China - Xiamen
Tel: 86-592-2388138
Fax: 86-592-2388130

China - Zhuhai
Tel: 86-756-3210040
Fax: 86-756-3210049

India - Bangalore
Tel: 91-80-3090-4444
Fax: 91-80-3090-4123

India - New Delhi
Tel: 91-11-4160-8631
Fax: 91-11-4160-8632

India - Pune
Tel: 91-20-3019-1500

Japan - Osaka
Tel: 81-6-6152-7160
Fax: 81-6-6152-9310

Japan - Tokyo
Tel: 81-3-6880- 3770
Fax: 81-3-6880-3771

Korea - Daegu
Tel: 82-53-744-4301
Fax: 82-53-744-4302

Korea - Seoul
Tel: 82-2-554-7200
Fax: 82-2-558-5932 or
82-2-558-5934

Malaysia - Kuala Lumpur
Tel: 60-3-6201-9857
Fax: 60-3-6201-9859

Malaysia - Penang
Tel: 60-4-227-8870
Fax: 60-4-227-4068

Philippines - Manila
Tel: 63-2-634-9065
Fax: 63-2-634-9069

Singapore
Tel: 65-6334-8870
Fax: 65-6334-8850

Taiwan - Hsin Chu
Tel: 886-3-5778-366
Fax: 886-3-5770-955

Taiwan - Kaohsiung
Tel: 886-7-213-7828

Taiwan - Taipei
Tel: 886-2-2508-8600
Fax: 886-2-2508-0102

Thailand - Bangkok
Tel: 66-2-694-1351
Fax: 66-2-694-1350

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Dusseldorf
Tel: 49-2129-3766400

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Pforzheim
Tel: 49-7231-424750

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Venice
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Poland - Warsaw
Tel: 48-22-3325737

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820

01/27/15

© 2010 - 2015 Microchip Technology Inc.