

Two-Way Radio Antenna Switch Diode Powermite 1 Package

UPP1001–UPP1004e3




Product Overview

This Microchip Powermite 1 PIN diode is perfect for two-way radio antenna switch applications where size and power handling capability are critical with its high isolation, low loss and low distortion characteristics. Its advantages also include the low forward bias resistance and high zero bias impedance that are essential for low loss, high isolation and wide bandwidth antenna switch performance. They offer high current/power capabilities previously only found in much larger packages.

In addition to its size advantages, Powermite 1 package features include a full metallic bottom that eliminates possibility of solder flux entrapment during assembly and a unique locking tab acts as an efficient heat path from die to mounting plane for external heat sinking with very low thermal resistance junction to case (bottom). Its innovative design makes this device ideal for use with automatic insertion equipment. RoHS compliant versions are available.

Figure 1. DO-216AA Package



Features

- Low thermal resistance DO-216AA package for higher current operation. High power capabilities
- Specified low distortion
- Low bias current requirements
- High zero bias impedance
- Full metallic bottom eliminates flux entrapment
- Efficient heat path with Integral heatsink locking bottom metal tab
- Low profile-maximum height of 1.14 mm
- RoHS compliant versions available

Applications/Benefits

- Two-way radio antenna switch
- Low forward bias resistance
- High zero bias resistance
- Low loss high isolation for wide bandwidth performance
- Compatible with automatic insertion equipment
- Very low inductance and capacitance

Table of Contents

Product Overview..... 1

1. Maximum Ratings.....3

 1.1. Mechanical Packaging..... 3

2. Part Nomenclature.....4

 2.1. Symbols and Definitions..... 4

 2.2. Electrical Characteristics..... 4

3. Graphs..... 5

4. Package Dimensions..... 7

 4.1. Mounting Pad Dimensions..... 7

5. Revision History..... 8

Microchip Information..... 9

 Trademarks..... 9

 Legal Notice..... 9

 Microchip Devices Code Protection Feature..... 9

1. Maximum Ratings

Table 1-1. Maximum Ratings

Parameters/Test Conditions	Symbol	Value	Unit
Junction and Storage Temperature	T_J and T_{STG}	-55 to +150	°C
Thermal Resistance Junction-to-Tab 1	$R_{\theta JL}$	30	°C/W
Thermal Resistance Junction-to-Case	$R_{\theta JC}$	10	°C/W
Steady-State Power Dissipation at $T_{TAB1} = 75\text{ °C}$ ¹	P_D	2.5	W
Reverse Voltage at $I_R = 10\text{ }\mu\text{A}$	V_R	UPP1001(e3) 100	V
UPP1002(e3)		200	
UPP1004(e3)		400	
Solder Temperature at 10 seconds	T_{SP}	260	°C

Note:


- When mounted on a PC board with 1 oz copper.

1.1. Mechanical Packaging

- Case: Void-free transfer molded thermosetting epoxy compound meeting UL94V-0
- Terminals: Annealed matte-tin over copper and readily solderable per MIL-STD-750, method 2026
- Marking: P11• for UPP1001, P02• for UPP1002, and P04• for UPP1004 (dot indicates “e3” designation). Date Code
- Polarity: Cathode designated by TAB 2
- Tape and Reel Option: 16 mm tape per standard EIA-481-B. Consult factory for quantities.
- Weight: Approximately 0.016 gram
- See [Package Dimensions](#)

2. Part Nomenclature

Figure 2-1. Part Nomenclature

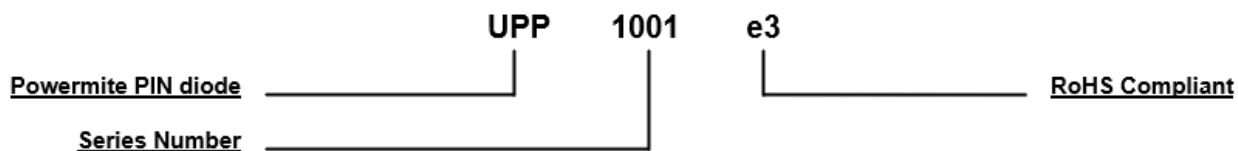

2.1. Symbols and Definitions

Table 2-1. Symbols and Definitions

Symbol	Definition
C_T	Total Capacitance: The total small signal capacitance between the diode terminals of a complete device.
I_F	Forward Current: The dc current flowing from the external circuit into the anode terminal.
I_R	Reverse Current: The dc current flowing from the external circuit into the cathode terminal at the specified voltage V_R .
V_F	Forward Voltage: A positive dc anode-cathode voltage the device will exhibit at a specified forward current.
V_R	Reverse Voltage: A positive dc cathode-anode voltage below the breakdown region.

2.2. Electrical Characteristics

Table 2-2. Electrical Characteristics at $T_A = 25\text{ }^{\circ}\text{C}$ Unless Otherwise Noted

Part Numbers (1)	Series Resistance R_S at $f = 100\text{ MHz}$ $I_F = 10\text{ mA}$ (see Figure 3-1)		Series Resistance R_S at $f = 100\text{ MHz}$ $I_F = 50\text{ mA}$		Capacitance C_T at $f = 1\text{ MHz}$ $V_R = 0\text{ V}$ (see Figure 3-2)		Parallel Resistance R_P at $f = 100\text{ MHz}$ $V = 0\text{ V}$ (see Figure 3-3)		Carrier Lifetime τ at $I_F = 10\text{ mA}$		Reverse Current I_R at V_R		Forward Voltage V_F at $I_F = 50\text{ mA}$ (see Figure 3-4)	
	Ω		Ω		pF		k Ω		μS		μA		Volts	
	TYP	MAX	TYP	MAX	TYP	MAX	MIN	TYP	MIN	TYP	TYP	MAX	TYP	MAX
UPP1001	0.75	1.0	0.35	0.45	1.2	1.6	5	8	2.0	3.5	0.1	10	0.75	1.0
UPP1002														
UPP1004														

Note:

1. Include e3 in Part Number for RoHS compliant parts (for example, UPP1001e3).

3. Graphs

Figure 3-1. Series Resistance (Typical)

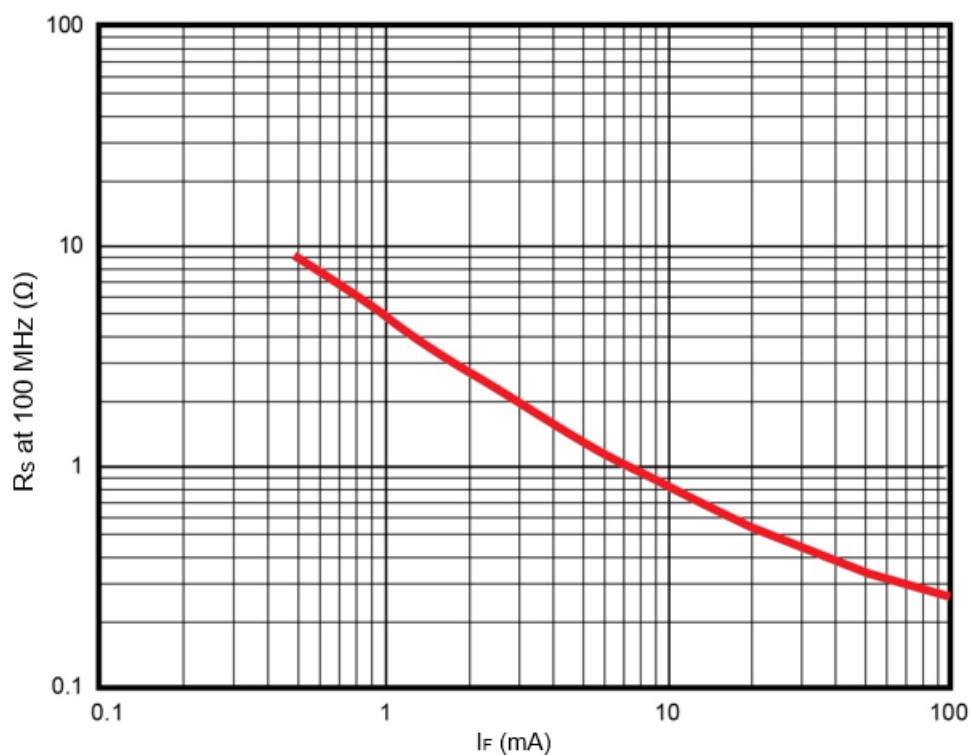


Figure 3-2. Capacitance (Typical)




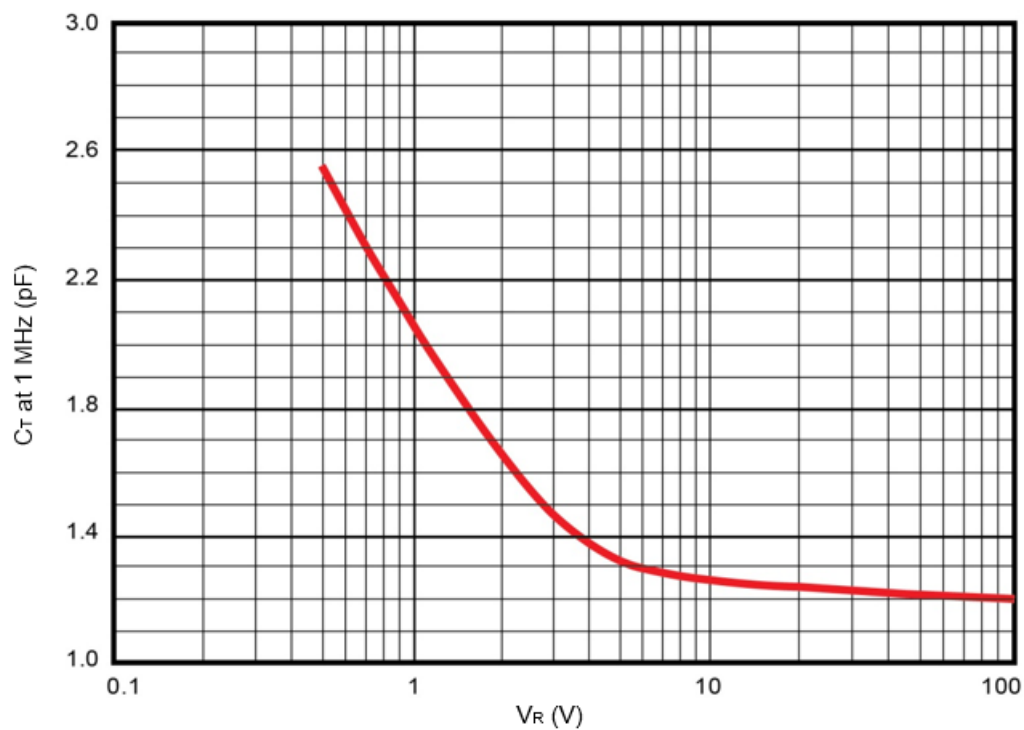


Figure 3-3. Parallel Resistance (Typical)**Figure 3-4. Forward Current Vs. Forward Voltage (Typical)**

4. Package Dimensions


Figure 4-1. Package Dimensions

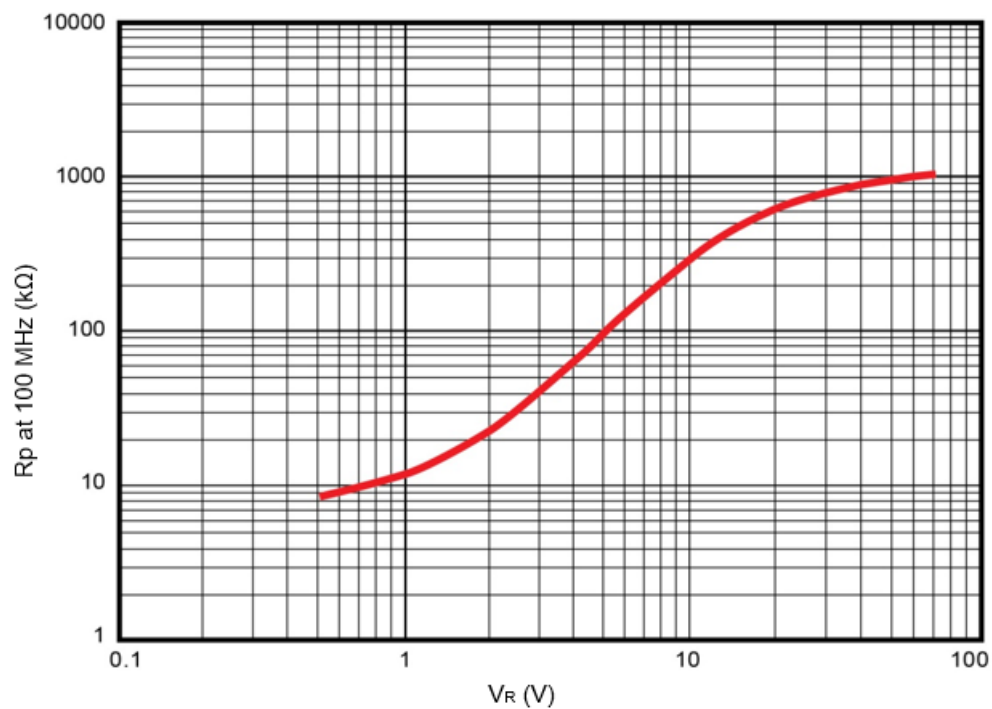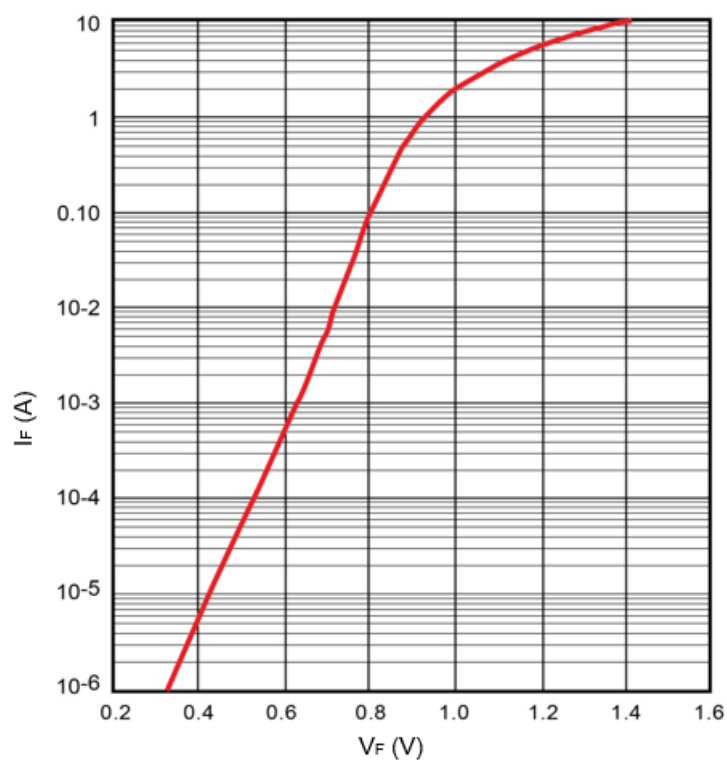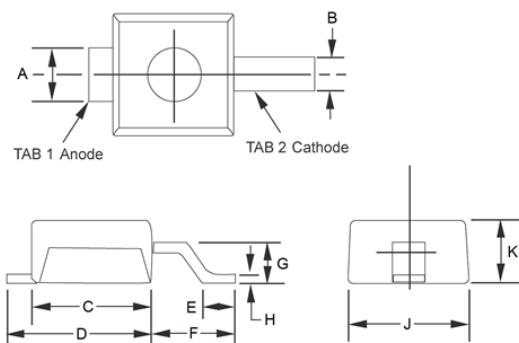

Ltr	Dimensions			
	Inch		Millimeters	
	Min.	Max.	Min .	Max.
A	0.029	0.039	0.73	0.99
B	0.016	0.026	0.40	0.66
C	0.070	0.080	1.77	2.03
D	0.087	0.097	2.21	2.46
E	0.020	0.030	0.50	0.76
F	0.051	0.061	1.29	1.54
G	0.021	0.031	0.53	0.78
H	0.004	0.008	0.10	0.20
J	0.070	0.080	1.77	2.03
K	0.035	0.045	0.89	1.14

4.1. Mounting Pad Dimensions

Figure 4-2. Mounting Pad Dimensions

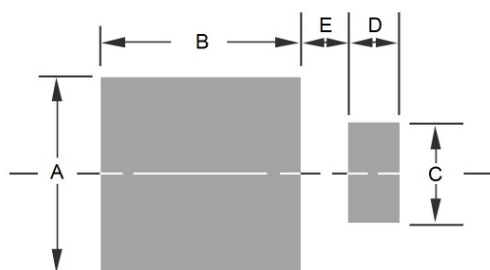

Ltr	Dimensions	
	Inch	Millimeters
A	0.100	2.54
B	0.105	2.67
C	0.050	1.27
D	0.030	0.76
E	0.025	0.64

5. Revision History

The revision history describes the changes that were implemented in the document. The changes are listed by revision, starting with the most current publication.

Revision	Date	Description
A	04/2025	Document was converted to Microchip template and assigned literature number DS00005908.
Rev. D	01/2025	Microsemi document was created and assigned literature number RF01104.

Microchip Information

Trademarks

The “Microchip” name and logo, the “M” logo, and other names, logos, and brands are registered and unregistered trademarks of Microchip Technology Incorporated or its affiliates and/or subsidiaries in the United States and/or other countries (“Microchip Trademarks”). Information regarding Microchip Trademarks can be found at <https://www.microchip.com/en-us/about/legal-information/microchip-trademarks>.

ISBN: 979-8-3371-0980-0

Legal Notice

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at www.microchip.com/en-us/support/design-help/client-support-services.

THIS INFORMATION IS PROVIDED BY MICROCHIP “AS IS”. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP’S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer’s risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Microchip Devices Code Protection Feature

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip products are strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is “unbreakable”. Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.