

# TUSB215 USB 2.0 High Speed Signal Conditioner with USB BC1.2 CDP

## 1 Features

- Compatible with USB 2.0, OTG 2.0 and BC 1.2
- Pin strap or I<sup>2</sup>C Configurable
- USB BC1.2 Charging Downstream Port (CDP) controller
- Support for LS, FS, HS signaling
- Ultra-low USB Disconnect and Shutdown Power Consumption
- Scalable solution - Daisy Chain Device for High Loss Applications
- D1P/M and D2P/M Interchangeable and Host/Device Agnostic
- Supports up to 5m pre-channel or 2m post-channel Cable Length
  - Four Selectable AC Boost Setting Via External Pulldown Resistor
  - DC Boost Along With AC Boost for Best Signal Integrity

## 2 Applications

- Notebooks
- Desktops
- Docking Stations
- Tablets
- Cell Phones
- Active Cable, Cable Extenders
- Backplane
- Televisions

## 3 Description

The TUSB215 is a USB High-Speed (HS) signal conditioner, designed to compensate for ISI signal loss in a transmission channel which helps passing USB electrical compliance tests.

TUSB215 has a patent-pending design which is agnostic to USB Low Speed (LS) and Full Speed (FS) signals. LS and FS signal characteristics are unaffected by the TUSB215 while HS signals are compensated.

Programmable signal AC boost and DC boost permits fine tuning device performance to optimize High Speed signals at the connector, this allows use in many different applications.


In addition, TUSB215 is compatible with the USB On-The-Go (OTG) and Battery Charging (BC) protocols. TUSB215 further acts as Charging Downstream Port (CDP) controller and handles the necessary handshakes with the downstream device.

### Device Information <sup>(1)</sup>

| PART NUMBER | PACKAGE   | BODY SIZE (NOM)   |
|-------------|-----------|-------------------|
| TUSB215     | VQFN (14) | 3.50 mm x 3.50 mm |
| TUSB215I    |           |                   |

(1) For all available packages, see the orderable addendum at the end of the datasheet.

### Simplified Schematic

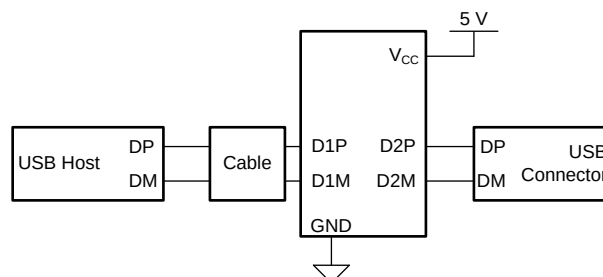

Copyright © 2017, Texas Instruments Incorporated




## Table of Contents

|                                                |          |                                                                  |           |
|------------------------------------------------|----------|------------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                        | <b>1</b> | 7.3 Feature Description .....                                    | <b>8</b>  |
| <b>2 Applications</b> .....                    | <b>1</b> | 7.4 Device Functional Modes .....                                | <b>9</b>  |
| <b>3 Description</b> .....                     | <b>1</b> | <b>8 Application and Implementation</b> .....                    | <b>11</b> |
| <b>4 Revision History</b> .....                | <b>2</b> | 8.1 Application Information .....                                | <b>11</b> |
| <b>5 Pin Configuration and Functions</b> ..... | <b>3</b> | 8.2 Typical Application .....                                    | <b>11</b> |
| <b>6 Specifications</b> .....                  | <b>4</b> | <b>9 Power Supply Recommendations</b> .....                      | <b>18</b> |
| 6.1 Absolute Maximum Ratings .....             | 4        | <b>10 Layout</b> .....                                           | <b>19</b> |
| 6.2 ESD Ratings .....                          | 4        | 10.1 Layout Guidelines .....                                     | 19        |
| 6.3 Recommended Operating Conditions .....     | 4        | 10.2 Layout Example .....                                        | 19        |
| 6.4 Thermal Information .....                  | 5        | <b>11 Device and Documentation Support</b> .....                 | <b>20</b> |
| 6.5 Electrical Characteristics .....           | 5        | 11.1 Receiving Notification of Documentation Updates .....       | 20        |
| 6.6 Switching Characteristics .....            | 6        | 11.2 Community Resources .....                                   | 20        |
| 6.7 Typical Characteristics .....              | 7        | 11.3 Trademarks .....                                            | 20        |
| <b>7 Detailed Description</b> .....            | <b>8</b> | 11.4 Electrostatic Discharge Caution .....                       | 20        |
| 7.1 Overview .....                             | 8        | 11.5 Glossary .....                                              | 20        |
| 7.2 Functional Block Diagram .....             | 8        | <b>12 Mechanical, Packaging, and Orderable Information</b> ..... | <b>20</b> |

## 4 Revision History

| Changes from Revision A (August 2017) to Revision B                                                                                                                                                                                         | Page     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| • Changed Note From: Pull-up resistors for SDA and SCL pins in I <sup>2</sup> C mode should be 2 kΩ (5%). To: Pull-up resistors for SDA and SCL pins in I <sup>2</sup> C mode should be 4.7 kΩ (5%) in the <i>Pin Functions</i> table ..... | <b>3</b> |
| • Added Test Conditions to RSTN: V <sub>IH</sub> and V <sub>IL</sub> in the <i>Electrical Characteristics</i> table .....                                                                                                                   | <b>5</b> |
| • Added new parameters to SCL/SDA: V <sub>IH</sub> , V <sub>IL</sub> , V <sub>SDA_OL</sub> , I <sub>SDA_OL</sub> the <i>Electrical Characteristics</i> table .....                                                                          | <b>5</b> |
| • Added Test Conditions To: DC_BOOST: V <sub>IH</sub> , V <sub>IM</sub> , and V <sub>IL</sub> the <i>Electrical Characteristics</i> table .....                                                                                             | <b>5</b> |
| • Added test conditions to t <sub>rise_dxx</sub> and t <sub>fall_dxx</sub> in the <i>Switching Characteristics</i> table .....                                                                                                              | <b>6</b> |
| Changes from Original (August 2017) to Revision A                                                                                                                                                                                           | Page     |
| • Changed C <sub>IO_DXX</sub> TYP value From: 7 pF To: 2.7 pF in the <i>Electrical Characteristics</i> table .....                                                                                                                          | <b>6</b> |

## 5 Pin Configuration and Functions

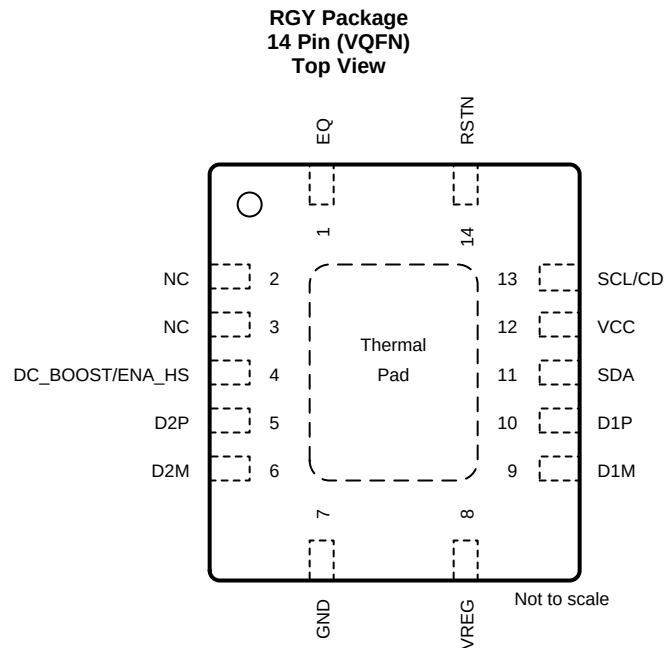

### Pin Functions

| PIN                                |      | I/O | INTERNAL<br>PULLUP/PULLDOWN      | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------|------|-----|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                               | NO.  |     |                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| EQ                                 | 1    | I   | N/A                              | USB High Speed AC boost select via external pull down resistor. Sampled upon de-assertion of RSTN. Does not recognize real time adjustments. See application section for details. Auto selects maximum AC boost level when left floating.                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| NC                                 | 2, 3 | N/A | N/A                              | Leave unconnected.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| DC_BOOST <sup>(1)</sup><br>/ENA_HS | 4    | I/O |                                  | In I2C mode:<br>Reserved for TI test purpose.<br>In non-I2C mode:<br>At reset: 3-level input signal DC_BOOST. USB High Speed DC signal boost selection.<br>H (pin is pulled high) – 80 mV<br>M (pin is left floating) – 60 mV<br>L (pin is pulled low) – 40 mV<br>After reset: Output signal ENA_HS. Flag indicating that channel is in High Speed mode. Asserted upon:<br>1. Detection of USB-IF High Speed test fixture from an unconnected state followed by transmission of USB_TEST_PACKET pattern.<br>2. Squelch detection following USB reset with a successful HS handshake [HS handshake is declared to be successful after single chirp J chirp K pair where each chirp is within 18 $\mu$ s – 128 $\mu$ s]. |
| D2P                                | 5    | I/O | N/A                              | USB High Speed positive port.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| D2M                                | 6    | I/O | N/A                              | USB High Speed negative port.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| GND                                | 7    | PWR | N/A                              | Ground                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| VREG                               | 8    | O   | N/A                              | 1.8-V LDO output. Only enabled when operating in High Speed mode. Requires 0.1- $\mu$ F external capacitor to GND to stabilize the core.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| D1M                                | 9    | I/O | N/A                              | USB High Speed negative port..                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| D1P                                | 10   | I/O | N/A                              | USB High Speed positive port.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| SDA <sup>(2)</sup>                 | 11   | I/O | RSTN asserted: 500 k $\Omega$ PD | I2C Mode:<br>Bidirectional I2C data pin [I2C address = 0x2C].<br>In non I2C mode:<br>Reserved for TI test purpose.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

(1) Pull-down and pull-up (to 3.3 V) resistors for DC\_BOOST pins must be between 22 k $\Omega$  to 47 k $\Omega$  in non I<sup>2</sup>C mode.

(2) Pull-up resistors for SDA and SCL pins in I<sup>2</sup>C mode should be 4.7 k $\Omega$  (5%). If both SDA and SCL are pulled up at reset the device enters into I<sup>2</sup>C mode.

**Pin Functions (continued)**

| PIN                    |     | I/O | INTERNAL<br>PULLUP/PULLDOWN | DESCRIPTION                                                                                                                                                                                                                                                                                                         |
|------------------------|-----|-----|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                   | NO. |     |                             |                                                                                                                                                                                                                                                                                                                     |
| VCC                    | 12  | PWR | N/A                         | Supply power                                                                                                                                                                                                                                                                                                        |
| SCL <sup>(2)</sup> /CD | 13  | I/O | RSTN asserted: 500 kΩ PD    | In I2C mode:<br>I2C clock pin [I2C address = 0x2C].<br>Non I2C mode:<br>After reset: Output CD. Flag indicating that a USB device is attached (connection detected). Asserted from an unconnected state upon detection of DP or DM pull-up resistor. De-asserted upon detection of disconnect.                      |
| RSTN                   | 14  | I   | 500 kΩ PU                   | Device disable/enable.<br>Low – Device is at reset and in shutdown, and<br>High – Normal operation.<br>Recommend 0.1-μF external capacitor to GND to ensure clean power on reset if not driven.<br>If the pin is driven, it must be held low until the supply voltage for the device reaches within specifications. |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

 over operating free-air temperature and voltage range (unless otherwise noted)<sup>(1)</sup>

|                           |                                              | MIN  | MAX | UNIT |
|---------------------------|----------------------------------------------|------|-----|------|
| Supply Voltage Range      | VCC                                          | -0.3 | 6   | V    |
| Voltage Range on I/O pins | DxP, DxM, RSTN, EQ, SCL, SDA, DC_BOOST, VREG | -0.3 | 3.8 | V    |
| T <sub>stg</sub>          | Storage temperature                          | -65  | 150 | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 6.2 ESD Ratings

|                    |                         | VALUE                                                                                    | UNIT  |
|--------------------|-------------------------|------------------------------------------------------------------------------------------|-------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>              | ±2000 |
|                    |                         | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup> | ±500  |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.  
 (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature and voltage range (unless otherwise noted)

|                 |                      | MIN      | NOM | MAX | UNIT |
|-----------------|----------------------|----------|-----|-----|------|
| V <sub>CC</sub> | Supply voltage       | 4.4      | 5   | 5.5 | V    |
| T <sub>A</sub>  | Ambient temperature  | TUSB215  | 0   | 70  | °C   |
|                 |                      | TUSB215I | -40 | 85  | °C   |
| T <sub>J</sub>  | Junction temperature | TUSB215  | 0   | 85  | °C   |
|                 |                      | TUSB215I | -40 | 105 | °C   |

## 6.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TUSB215    | UNIT |
|-------------------------------|----------------------------------------------|------------|------|
|                               |                                              | RGY (VQFN) |      |
|                               |                                              | 14 PINS    |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 49.1       | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 52.8       | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 24.2       | °C/W |
| Ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 2.2        | °C/W |
| Ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 24.3       | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | 7          | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Electrical Characteristics

over operating free-air temperature and voltage range (unless otherwise noted)

| PARAMETER               |                                                                   | TEST CONDITIONS                                                                                                | MIN | TYP  | MAX | UNIT |
|-------------------------|-------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-----|------|-----|------|
| POWER                   |                                                                   |                                                                                                                |     |      |     |      |
| I <sub>ACTIVE_HS</sub>  | High-speed active curent                                          | USB channel = HS mode; 480 Mbps traffic; V <sub>CC</sub> = 5V; V <sub>CC</sub> supply stable; DC Boost = 60 mV |     | 18   | 30  | mA   |
| I <sub>IDLE_HS</sub>    | High-speed idle current                                           | USB channel = HS mode; no traffic; V <sub>CC</sub> = 5V; V <sub>CC</sub> supply stable; DC Boost = 60 mV       |     | 13   | 22  | mA   |
| I <sub>SUSPEND_HS</sub> | High-speed suspend current                                        | USB channel = HS suspend mode; V <sub>CC</sub> = 5V; V <sub>CC</sub> supply stable                             |     | 0.76 | 1.5 | mA   |
| I <sub>FS_LS</sub>      | Full/Low speed current                                            | USB channel = FS mode or LS mode; V <sub>CC</sub> = 5V                                                         |     | 0.77 | 1.5 | mA   |
| I <sub>DISCONNECT</sub> | Disconnect current                                                | Host side application; No device attachment; V <sub>CC</sub> = 5V                                              |     | 0.86 | 1.5 | mA   |
| I <sub>RSTN</sub>       | Disable current                                                   | RSTN driven low; V <sub>CC</sub> supply stable; V <sub>CC</sub> = 5V                                           |     | 22   | 80  | μA   |
| I <sub>LKG_FS</sub>     | Pin fail-safe leakage current for SDA, SCL, DC_BOOST, DxP/N, RSTN | V <sub>CC</sub> = 0 V; Pin at 3.6 V                                                                            |     |      | 40  | μA   |
| RSTN                    |                                                                   |                                                                                                                |     |      |     |      |
| V <sub>IH</sub>         | High-level input voltage                                          | V <sub>CC</sub> = 4.4V                                                                                         | 2   |      | 3.6 | V    |
| V <sub>IL</sub>         | Low-level input voltage                                           | V <sub>CC</sub> = 5.5V                                                                                         | 0   |      | 0.8 | V    |
| I <sub>IH</sub>         | High-level input current                                          | V <sub>IH</sub> = 3.6 V                                                                                        | -4  |      | 4   | μA   |
| I <sub>IL</sub>         | Low-level input current                                           | V <sub>IL</sub> = 0 V                                                                                          | -11 |      | 11  | μA   |
| EQ                      |                                                                   |                                                                                                                |     |      |     |      |
| R <sub>EQ</sub>         | External pull-down resistor on EQ pin.                            | AC Boost Level 0                                                                                               |     |      | 160 | Ω    |
|                         |                                                                   | AC Boost Level 1                                                                                               | 1.4 |      | 2   | kΩ   |
|                         |                                                                   | AC Boost Level 2                                                                                               | 3.7 |      | 3.9 | kΩ   |
|                         |                                                                   | AC Boost Level 3                                                                                               | 6   |      |     | kΩ   |
| CD, ENA_HS              |                                                                   |                                                                                                                |     |      |     |      |
| V <sub>OH</sub>         | High-level output voltage                                         | I <sub>O</sub> = -50μA                                                                                         | 2.4 |      |     | V    |
| V <sub>OL</sub>         | Low-level output voltage                                          | I <sub>O</sub> = 50μA                                                                                          |     |      | 0.4 | V    |
| SCL, SDA                |                                                                   |                                                                                                                |     |      |     |      |
| C <sub>I2CBUS</sub>     | I2C Bus capacitance                                               |                                                                                                                | 4   |      | 150 | pF   |
| V <sub>IH</sub>         | SDA and SCL input high level voltage                              | V <sub>CC</sub> = 4.4V                                                                                         | 2   |      | 3.6 | V    |
| V <sub>IL</sub>         | SDA and SCL input Low level voltage                               | V <sub>CC</sub> = 5.5V                                                                                         |     |      | 0.8 | V    |
| V <sub>SDA_OL</sub>     | SDA low-level output voltage                                      | 4.7kΩ pullup to 3.6V; V <sub>CC</sub> = 4.4V                                                                   |     |      | 0.4 | V    |
| I <sub>SDA_OL</sub>     | SDA Low level output current                                      | V <sub>CC</sub> = 5.5V; I <sup>2</sup> C pulled up to 3.6V                                                     | 1.1 |      |     | mA   |

## Electrical Characteristics (continued)

over operating free-air temperature and voltage range (unless otherwise noted)

| PARAMETER                         | TEST CONDITIONS                                                                 | MIN | TYP | MAX | UNIT |
|-----------------------------------|---------------------------------------------------------------------------------|-----|-----|-----|------|
| <b>DC_BOOST</b>                   |                                                                                 |     |     |     |      |
| $V_{IH}$ High-level input voltage | $V_{CC} = 5V$                                                                   | 2.4 |     | 3.6 | V    |
| $V_{IM}$ Mid-level input voltage  | $V_{CC} = 5V$                                                                   |     | 1.6 |     | V    |
| $V_{IL}$ Low-level input voltage  | $V_{CC} = 5V$                                                                   | 0   |     | 0.4 | V    |
| <b>DxP, DxM</b>                   |                                                                                 |     |     |     |      |
| $C_{IO\_DXX}$ Capacitance to GND  | Measured with LCR meter and device powered down. 1 MHz sinusoid, 30 mVpp ripple |     | 2.7 |     | pF   |

## 6.6 Switching Characteristics

over operating free-air temperature and voltage range (unless otherwise noted)

| PARAMETER                                                                                                               | TEST CONDITIONS                                            | MIN | TYP | MAX    | UNIT    |
|-------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|-----|-----|--------|---------|
| $F_{BR\_DXX}$ DxP/M Bit Rate                                                                                            | USB channel = HS mode; 480 Mbps traffic; VCC supply stable |     |     | 480.24 | Mbps    |
| $t_{RISE\_DXX}$ DxP/M rise time                                                                                         | 10% - 90%; $V_{CC} = 5.5V$ ; Max AC Gain;                  | 100 |     |        | ps      |
| $t_{FALL\_DXX}$ DxP/M fall time                                                                                         | 90% - 10%; $V_{CC} = 5.5V$ ; Max AC Gain;                  | 100 |     |        | ps      |
| $t_{RSTN\_PU}$<br>$LSE\_WIDT$<br>$H$ Minimum width to detect a valid RSTN signal assert when the pin is actively driven | $V_{CC} = 4.4 V$ ; Refer to <a href="#">Figure 1</a>       | 20  |     |        | $\mu s$ |
| $t_{STABLE}$ VCC stable before RSTN de-assertion                                                                        | Refer to <a href="#">Figure 1</a>                          | 100 |     |        | $\mu s$ |
| $t_{VCC\_RAM}$<br>$P$ VCC ramp time                                                                                     |                                                            | 0.2 |     | 100    | ms      |

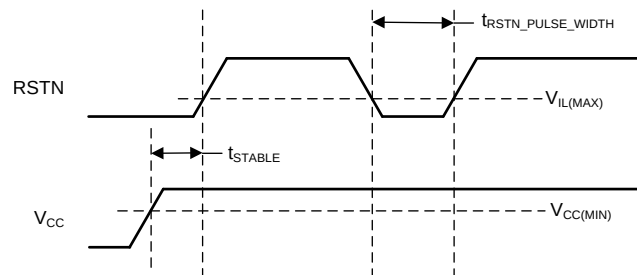


**Figure 1. Power On and Reset Timing**

## 6.7 Typical Characteristics

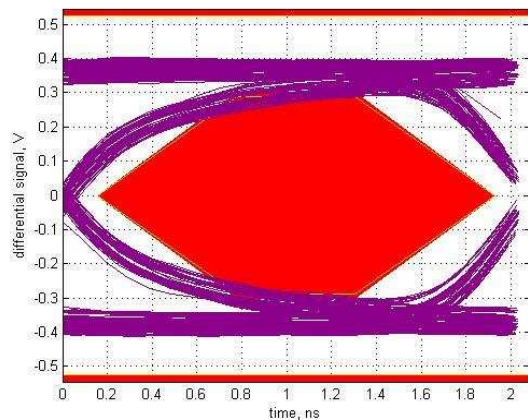


**Figure 2. USB2.0 HS Eye diagram, Host far-end with 2m cable post-channel loss without TUSB215**

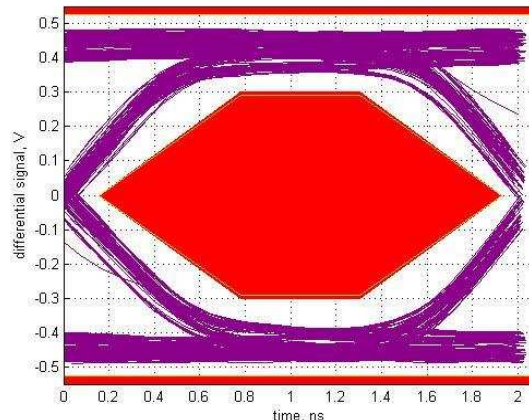


**Figure 3. USB2.0 HS Eye diagram, Host far-end with 2m cable post-channel loss with TUSB215**

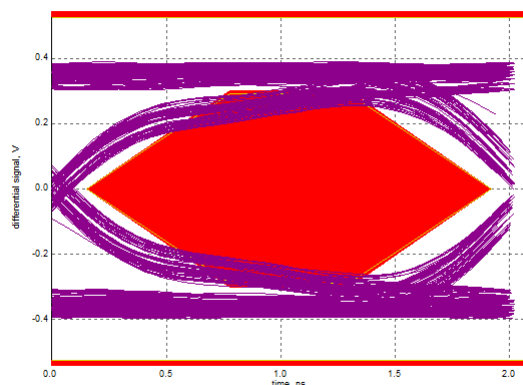


**Figure 4. USB2.0 HS Eye diagram, Host far-end with 5m cable pre-channel loss without TUSB215**

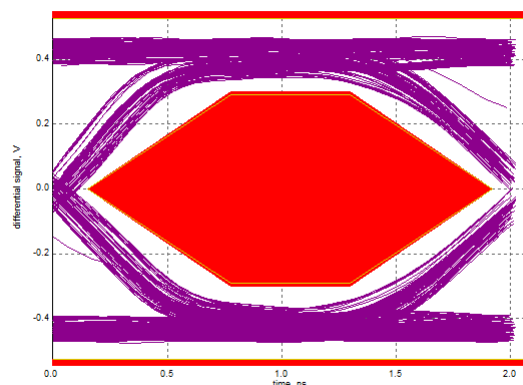


**Figure 5. USB2.0 HS Eye diagram, Host far-end with 5m cable pre-channel loss with TUSB215**


## 7 Detailed Description

### 7.1 Overview

The TUSB215 is a USB High-Speed (HS) signal conditioner, designed to compensate for ISI signal loss in a transmission channel. TUSB215 has a patent-pending design which is agnostic to USB Low Speed (LS) and Full Speed (FS) signals and does not alter their signal characteristics, while HS signals are compensated. In addition, the design is compatible with USB On-The-Go (OTG) and Battery Charging (BC) specifications. The TUSB215 provides USB Charging Downstream Port (CDP) controller for applications in which USB host or hub do not have this function.

Programmable signal AC boost through an external resistor on EQ pin permits fine tuning device performance to optimize signals helping to pass USB HS electrical compliance tests at the connector. Additional DC Boost configurable by three level input DC\_BOOST pin helps overcoming the cable losses.

### 7.2 Functional Block Diagram

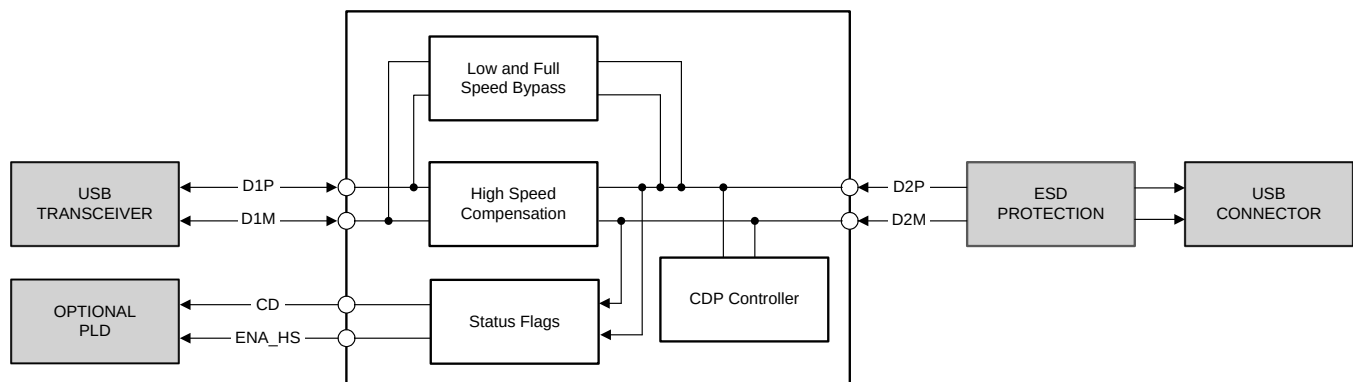

### 7.3 Feature Description

#### 7.3.1 EQ

The EQ pin of the TUSB215 is used to configure the AC boost of the device. The four levels of AC boost are set through different values of an external pulldown resistor at this pin.

#### 7.3.2 DC BOOST

The DC\_BOOST pin of the TUSB215 is a tri-level pin, used to set the DC gain of the device according to [Table 1](#).

**Table 1. DC Boost Settings**

| DC BOOST SETTING VIA PIN STRAP |                       |
|--------------------------------|-----------------------|
| DC_BOOST                       | DC Boost Setting (mV) |
| $V_{IL}$                       | 40                    |
| $V_{IM}$                       | 60                    |
| $V_{IH}$                       | 80                    |

### 7.3.3 BC1.2 CDP Support

The TUSB215 main function is a signal conditioner offering the EQ/Boost features to the incoming DP/DM signals. For applications in which USB host or hub do not provide USB BC charging downstream port (CDP) functionality, the TUSB215 can perform this task.

## 7.4 Device Functional Modes

### 7.4.1 Low Speed (LS) Mode

TUSB215 automatically detects a LS connection and does not enable signal compensation. CD pin is asserted high.

### 7.4.2 Full Speed (FS) Mode

TUSB215 automatically detects a FS connection and does not enable signal compensation. CD pin is asserted high.

### 7.4.3 High Speed (HS) Mode

TUSB215 automatically detects a HS connection and will enable signal compensation as determined by the configuration of the DC\_BOOST pin and the external pulldown resistance on its EQ pin. CD pin asserted high.

### 7.4.4 Shutdown Mode

TUSB215 is disabled when its RSTN pin is asserted low. In shutdown mode, the USB channel is still fully operational but there is neither signal compensation nor any indication from the CD pin as to the status of the channel.

### 7.4.5 I<sup>2</sup>C Mode

TUSB215 support 100 kHz I<sup>2</sup>C for device configuration, status readback and test purposes. This controller is enabled after SCL and SDA pins are sampled high shortly after de-assertion of RSTN. In this mode, the register as described in [Table 2](#) can be accessed by I<sup>2</sup>C read/write transaction to 7-bit slave address 0x2C. It is necessary to set CFG\_ACTIVE bit and reset it to zero after making changes to the EQ and DC Boost level registers to restart the state machine.

#### NOTE

All registers or fields in [Table 2](#) which are not specifically mentioned are considered reserved. The default value of these reserved registers or fields must not be changed. It is suggested to perform a read-modify-write operation to maintain the default value of the reserved fields.

**Table 2. Register definition**

| Offset | Bit(s) | Name       | Type | Default                            | Description                                                                                                                                                                                                                                                                                              |
|--------|--------|------------|------|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x01   | 6:4    | ACB_LVL    | RW   | XXX (Sampled from EQ pin at reset) | Sets the level of AC boost<br>000 :Level 0 AC boost programmed [MIN]<br>001 : Level 1 AC boost programmed<br>011 : Level 2 AC boost programmed<br>111 : Level 3 AC boost programmed [MAX]                                                                                                                |
| 0x03   | 0      | CFG_ACTIVE | RW   | 1b                                 | Configuration mode<br>0 : Normal mode. State machine enabled.<br>1 : Configuration mode: State machine disabled.<br>After reset, if I2C mode is true (SCL and SDA are both pulled high) it is maintained until it is cleared by an I2C write, but, if I2C mode is not true, it is cleared automatically. |

**TUSB215**

SLLSEX8B – AUGUST 2017 – REVISED SEPTEMBER 2017

[www.ti.com](http://www.ti.com)
**Device Functional Modes (continued)**
**Table 2. Register definition (continued)**

| Offset | Bit(s) | Name    | Type | Default                                  | Description                                                                                                                |
|--------|--------|---------|------|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| 0x0E   | 2:0    | DCB_LVL | RW   | XXX (Sampled from DC_BOOST pin at reset) | Sets the level of DC Boost<br>011 : 40mV (DC_Boost = L)<br>101 : 60mV (DC_Boost = M, default)<br>111 : 80mV (DC_Boost = H) |

## 8 Application and Implementation

### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.


### 8.1 Application Information

The primary purpose of the TUSB215 is to re-store the signal integrity of a USB High Speed channel up to the USB connector. The loss in signal quality stems from reduced channel bandwidth due to high loss PCB trace and other components that contribute a capacitive load. This can cause the channel to fail the USB near end eye mask. Proper use of the TUSB215 can help to pass this eye mask. Additionally the DC Boost helps overcoming DC losses from cables and traces.

A secondary purpose is to use the CD pin of the TUSB215 to control other blocks on the customer platform if so desired. The TUSB215 also provides CDP controller function.

### 8.2 Typical Application

A typical application is shown in [Figure 6](#). In this setup, D2P and D2M face the USB connector while D1P and D1M face the USB host or hub. If desired, the orientation may be reversed [that is, D2 faces transceiver and D1 faces connector].

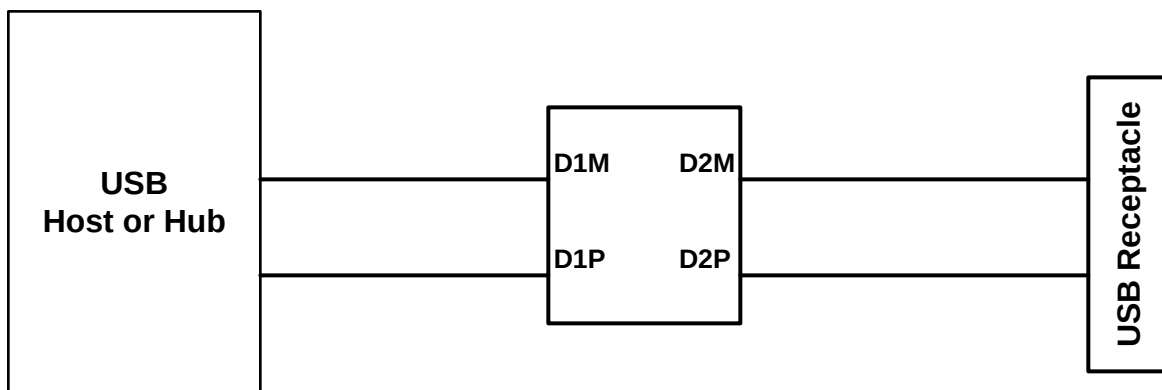

Copyright © 2017, Texas Instruments Incorporated

**Figure 6. Typical Application**

## Typical Application (continued)

### 8.2.1 Design Requirements

For this design example, use the parameters shown in the table below.

**Table 3. Design Parameters**

| PARAMETER                                            |                               |                      |                     | VALUE                                                             |
|------------------------------------------------------|-------------------------------|----------------------|---------------------|-------------------------------------------------------------------|
| $V_{CC}$ (4.4 V to 5.5 V)                            |                               |                      |                     | 5 V                                                               |
| I <sup>2</sup> C support required in system (Yes/No) |                               |                      |                     | No                                                                |
| AC Boost                                             | $R_{EQ}$                      |                      | Level               | AC Boost Level 2:<br>$R_{EQ} = 3.83\text{ k}$                     |
|                                                      | 0- $\Omega$                   |                      | 0                   |                                                                   |
|                                                      | 1.69 k $\pm$ 1%               |                      | 1                   |                                                                   |
|                                                      | 3.83 k $\pm$ 1%               |                      | 2                   |                                                                   |
|                                                      | DNI                           |                      | 3                   |                                                                   |
| DC Boost                                             | $R_{DC1}$                     | $R_{DC2}$            | Level               | Mid DC Level:<br>$R_{DC1} = \text{DNI}$<br>$R_{DC2} = \text{DNI}$ |
|                                                      | 22 k $\Omega$ - 47 k $\Omega$ | Do Not Install (DNI) | 40 mV Low DC boost  |                                                                   |
|                                                      | DNI                           | DNI                  | 60 mV Mid DC boost  |                                                                   |
|                                                      | 47 k $\Omega$                 | 24 k $\Omega$        | 80 mV High DC boost |                                                                   |

### 8.2.2 Detailed Design Procedure

TUSB215 requires a valid reset signal as described in the power supply recommendations section. The capacitor at RSTN pin is not required if a microcontroller drives the RSTN pin according to recommendations.

VREG pin is the internal LDO output that requires a 0.1- $\mu$ F external capacitor to GND to stabilize the core.

The ideal AC boost setting is dependent upon the signal chain loss characteristics of the target platform. The general recommendation is to start with AC boost level 0, and then increment to AC boost level 1, etc. if permissible. Same applies to the DC Boost setting where it is recommended to plan for the required pads or connections to change boost settings, but to start with DC boost level 1.

In order for the TUSB215 to recognize any change to the AC and DC Boost settings, the RSTN pin must be toggled. This is because the configuration is latched on power up and the inputs are ignored thereafter.


#### NOTE

The TUSB215 compensates for DC attenuation in the signal path according to the configuration of the DC\_BOOST pin. This pin is not 5V tolerant and therefore when selecting the highest DC boost level, the voltage level at DC\_BOOST pin must be less than 3.6V.

Placement of the device is also dependent on the application goal. [Table 4](#) summarizes our recommendations.

**Table 4. Platform Placement Guideline**

| PLATFORM GOAL                                          | SUGGESTED DEVICE PLACEMENT           |
|--------------------------------------------------------|--------------------------------------|
| Pass USB Near End Mask                                 | Close to measurement point           |
| Pass USB Far End Eye Mask                              | Close to USB PHY                     |
| Cascade multiple devices to improve device enumeration | Midway between each USB interconnect |

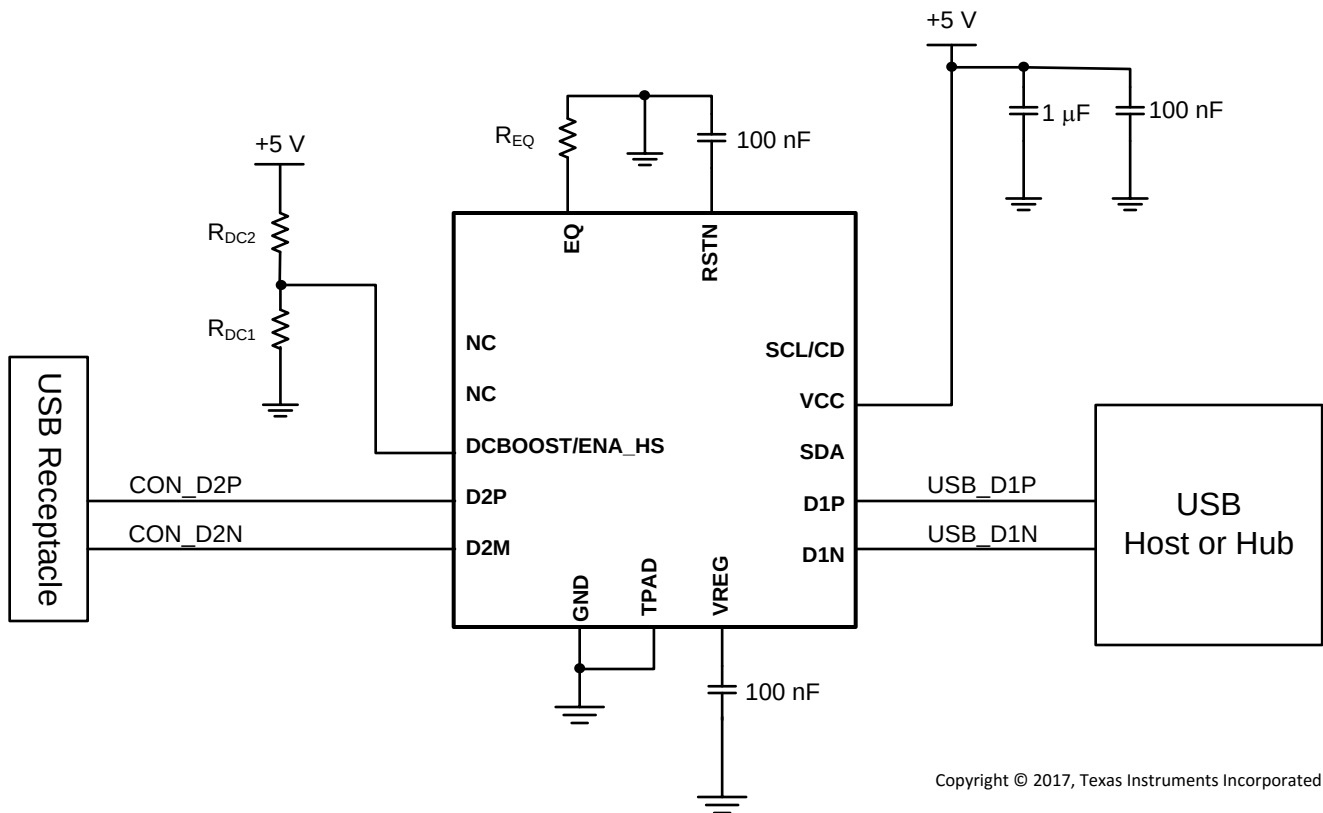

Copyright © 2017, Texas Instruments Incorporated

**Figure 7. Reference Schematic**

### **8.2.2.1 Test Procedure to Construct USB High Speed Eye Diagram**

#### **NOTE**

USB-IF certification tests for High Speed eye masks require the *mandated use* of the USB-IF developed test fixtures. These test fixtures do not require the use of oscilloscope probes. Instead they use SMA cables. More information can be found at the USB-IF Compliance Updates Page. It is located under the 'Electricals' section, ID 86 dated March 2013.

The following procedure must be followed before using any oscilloscope compliance software to construct a USB High Speed Eye Mask:

#### **8.2.2.1.1 For a Host Side Application**

1. Configure the TUSB215 to the desired AC and DC Boost settings
2. Power on (or toggle the RSTN pin if already powered on) the TUSB215
3. Using SMA cables, connect the oscilloscope and the USB-IF host-side test fixture to the TUSB215
4. Enable the host to transmit USB TEST\_PACKET
5. Execute the oscilloscope USB compliance software.
6. Repeat the above steps in order to re-test TUSB215 with a different settings

#### **8.2.2.1.2 For a Device Side Application**

1. Configure the TUSB215 to the desired AC and DC Boost settings
2. Power on (or toggle the RSTN pin if already powered on) the TUSB215
3. Connect a USB host, the USB-IF device-side test fixture, and USB device to the TUSB215. Ensure that the USB-IF device test fixture is configured to the 'INIT' position
4. Allow the host to enumerate the device
5. Enable the device to transmit USB TEST\_PACKET
6. Using SMA cables, connect the oscilloscope to the USB-IF device-side test fixture and ensure that the device-side test fixture is configured to the 'TEST' position.
7. Execute the oscilloscope USB compliance software.
8. Repeat the above steps in order to re-test TUSB215 with a different settings

### 8.2.3 Application Curves

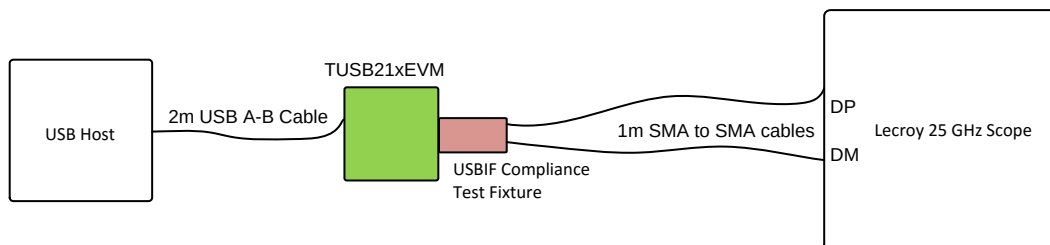


**Figure 8. Eye Diagram Bench Setup**

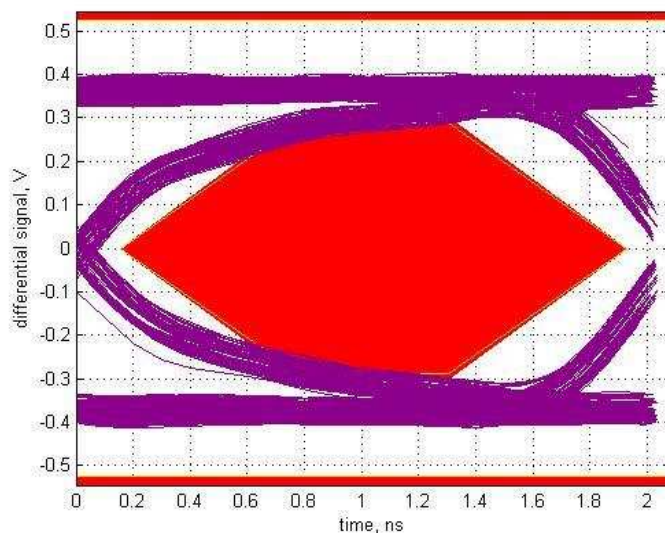
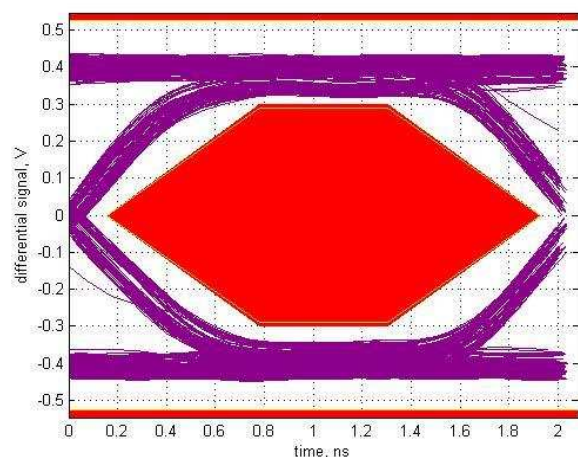
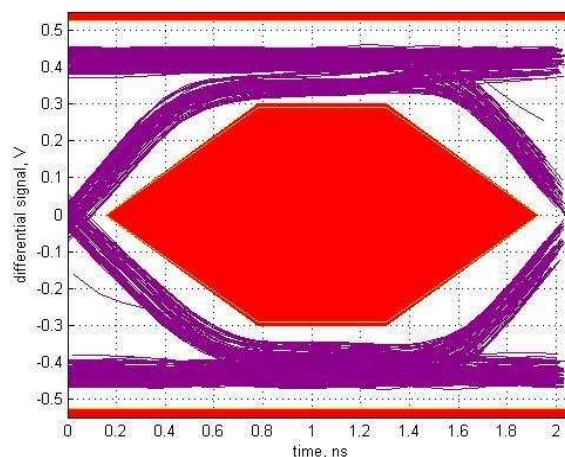
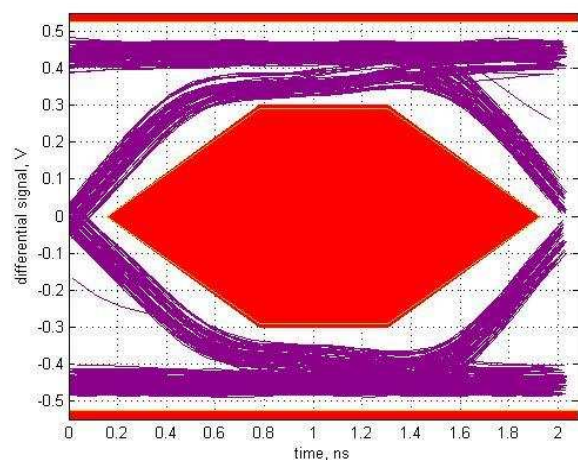
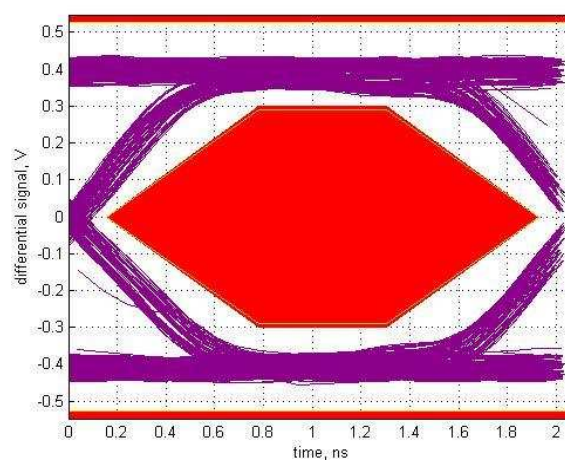
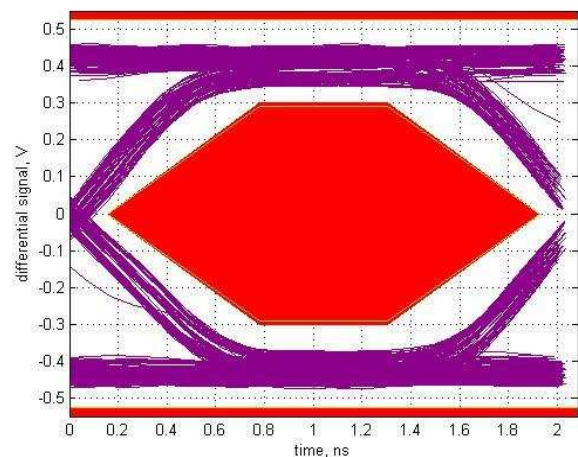
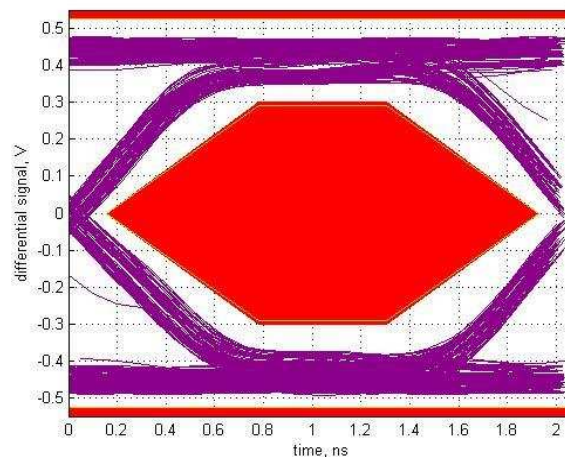


**Figure 9. No TUSB215**


**Figure 10. Low DC Boost, AC Boost Level 0**

**Figure 11. Mid DC Boost, AC Boost Level 0**

**Figure 12. High DC Boost, AC Boost Level 0**

**Figure 13. Low DC Boost, AC Boost Level 1**

**Figure 14. Mid DC Boost, AC Boost Level 1**

**Figure 15. High DC Boost, AC Boost Level 1**

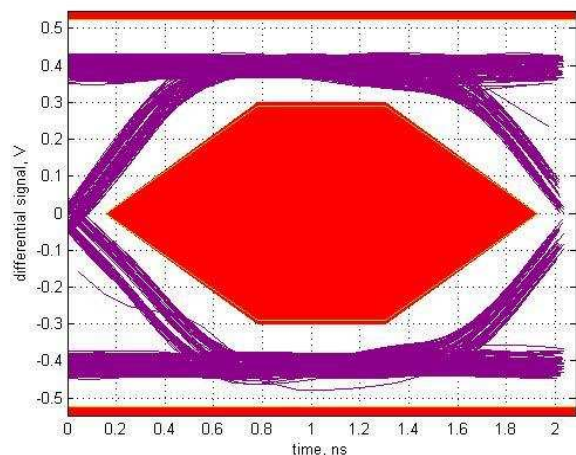


**Figure 16. Low DC Boost, AC Boost Level 2**

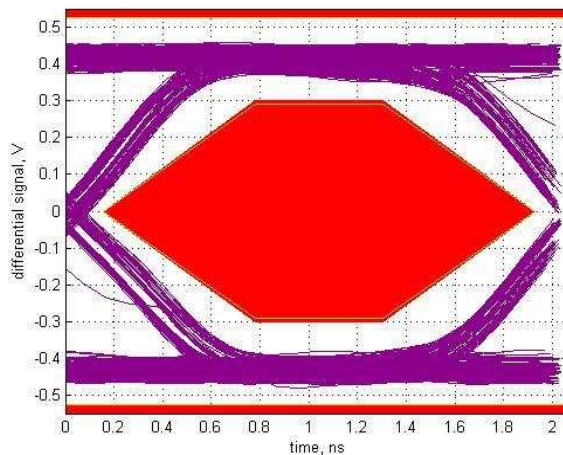


**Figure 17. Mid DC Boost, AC Boost Level 2**

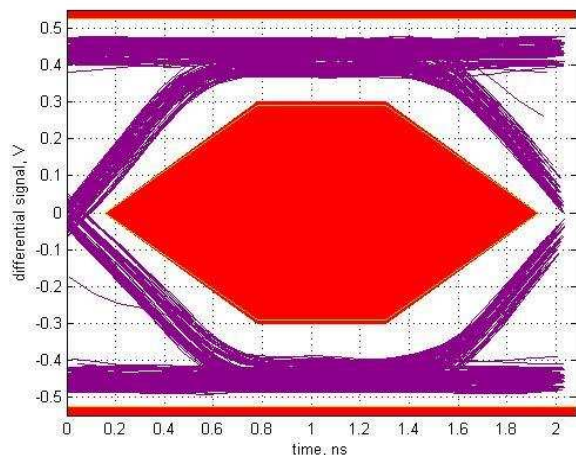


**Figure 18. High DC Boost, AC Boost Level 2**

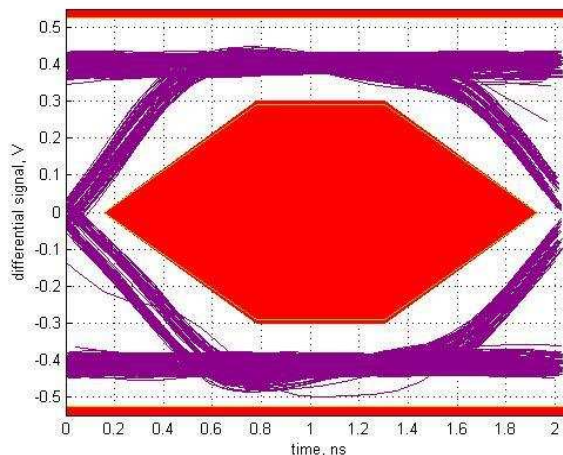


**Figure 19. Low DC Boost, AC Boost Level 3**

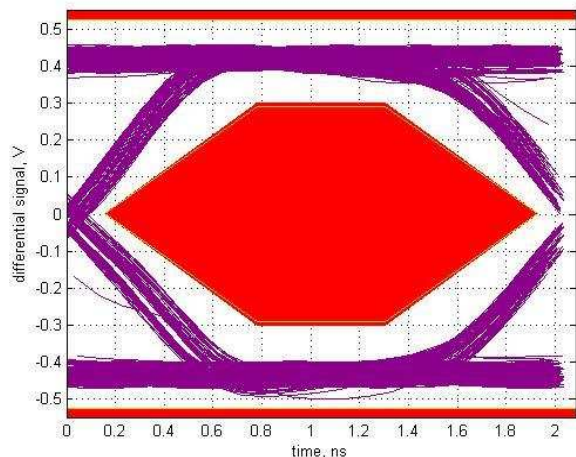


**Figure 20. Mid DC Boost, AC Boost Level 3**

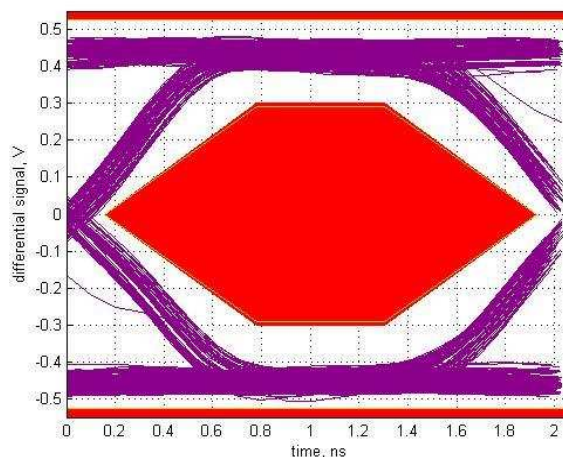


**Figure 21. High DC Boost, AC Boost Level 3**

## 9 Power Supply Recommendations

On power up, the interaction of the RSTN pin and power on ramp could result in digital circuits not being set correctly. The device should not be enabled until the power on ramp has settled to 4.4 V or higher to ensure a correct power on reset of the digital circuitry. If RSTN cannot be held low by microcontroller or other circuitry until the power on ramp has settled, then an external capacitor from the RSTN pin to GND is required to hold the device in the low power reset state.

The RC time constant should be larger than five times of the power on ramp time (0 to  $V_{CC}$ ). With a typical internal pullup resistance of 500 k $\Omega$ , the recommended minimum external capacitance is calculated as:

$$C_{RSTN} = [\text{Ramp Time} \times 5] \div [500 \text{ k}\Omega] \quad (1)$$

## 10 Layout

### 10.1 Layout Guidelines

To avoid the need for signal vias, it is highly recommend to route the High Speed traces on the same surface layer than the TUSB215 is placed. shows an example how one could layout the PCB for TUSB215.

The layout should use impedance controlled traces to maintain 90  $\Omega$  differential impedance for the whole signal path as required per USB 2.0 specification. General guidelines for highspeed signal routing apply.

### 10.2 Layout Example

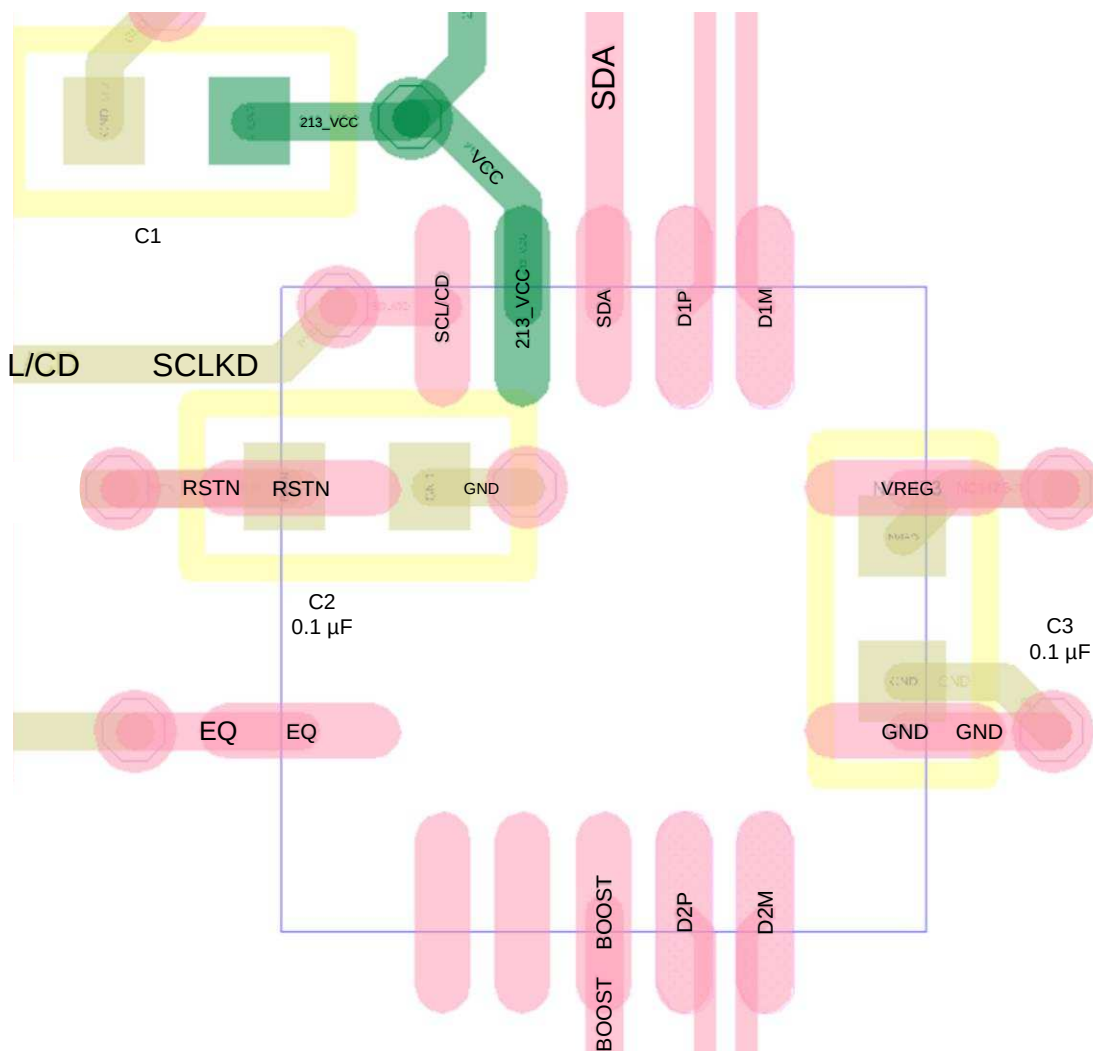


**Figure 22. Layout Example**

## 11 Device and Documentation Support

### 11.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 11.2 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 11.3 Trademarks

E2E is a trademark of Texas Instruments.  
All other trademarks are the property of their respective owners.

### 11.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 11.5 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 12 Mechanical, Packaging, and Orderable Information


The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.



## PACKAGE OUTLINE

### VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

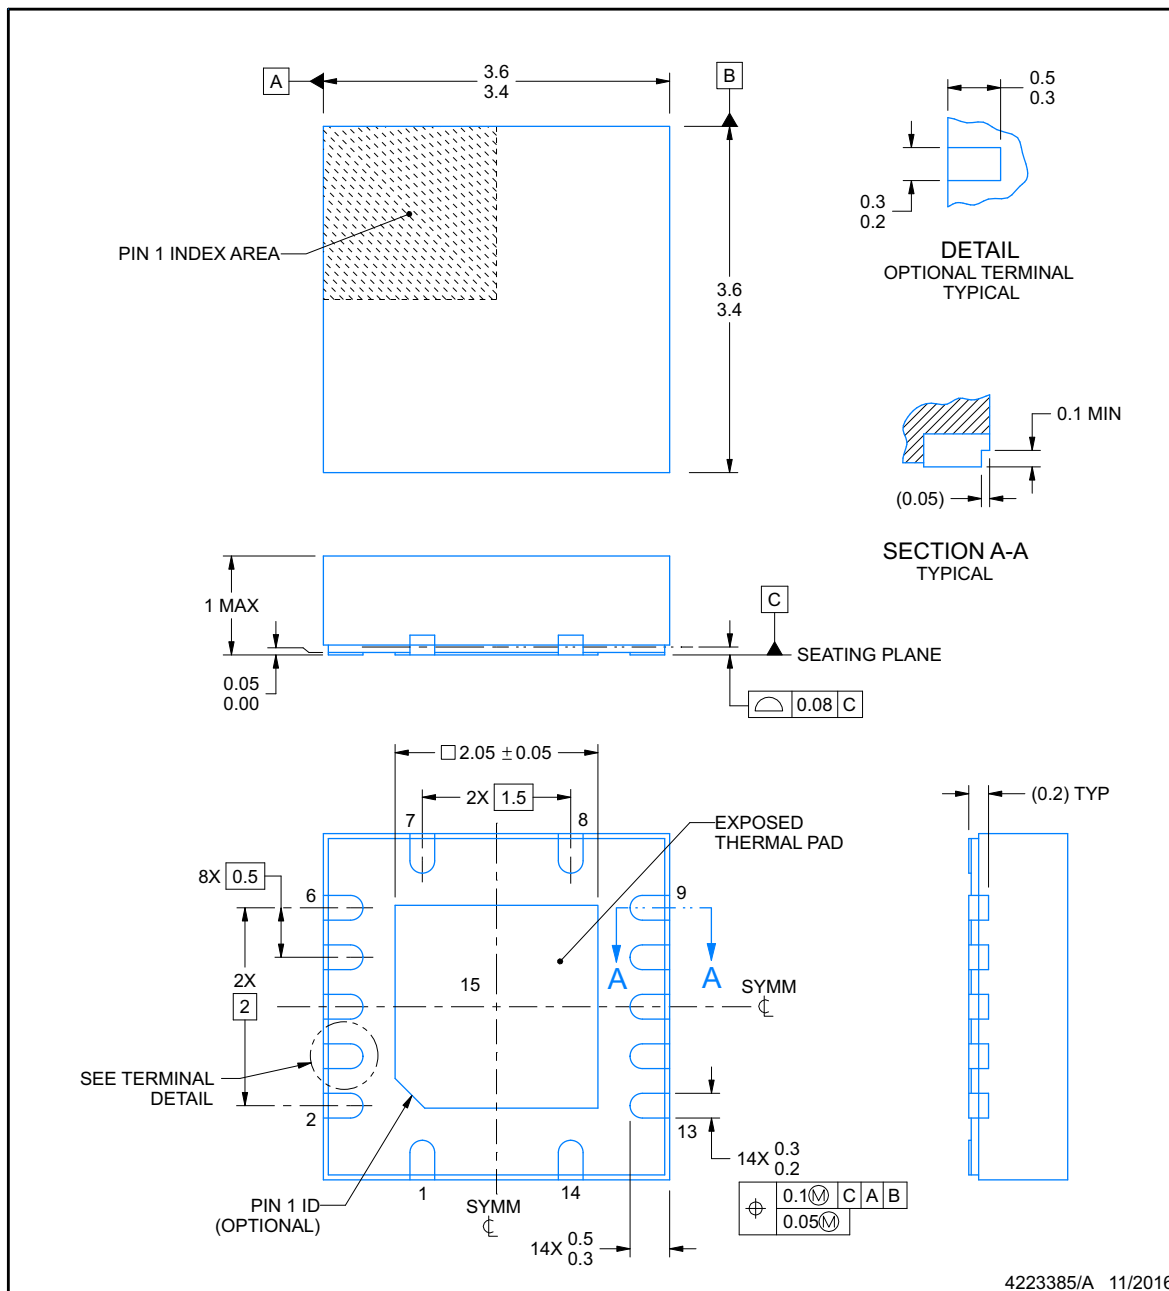


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.


## EXAMPLE BOARD LAYOUT

**RGY0014B**
**VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

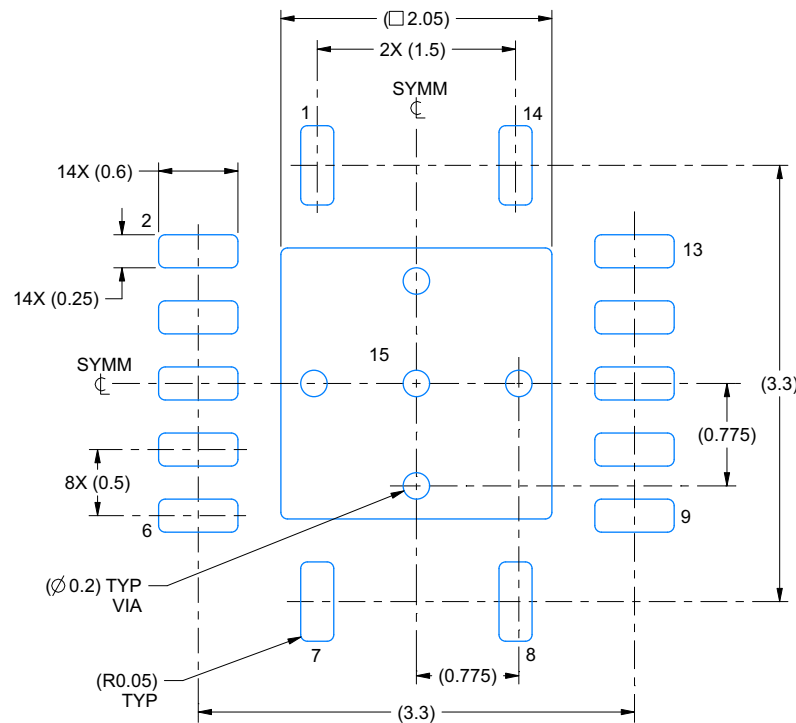

LAND PATTERN EXAMPLE  
SCALE:20X

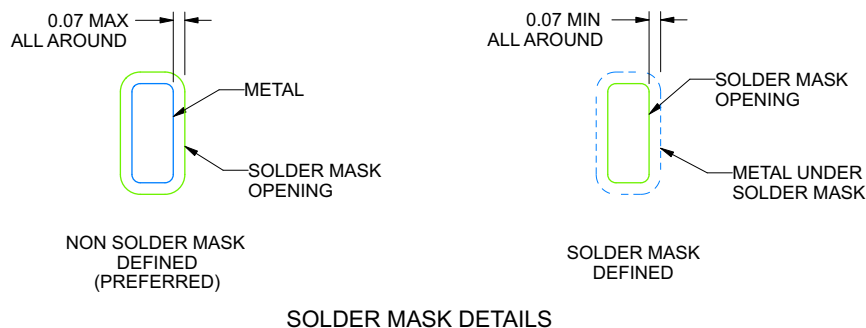

SOLDER MASK DETAILS

4223385/A 11/2016

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

## EXAMPLE STENCIL DESIGN

**RGY0014B**

**VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

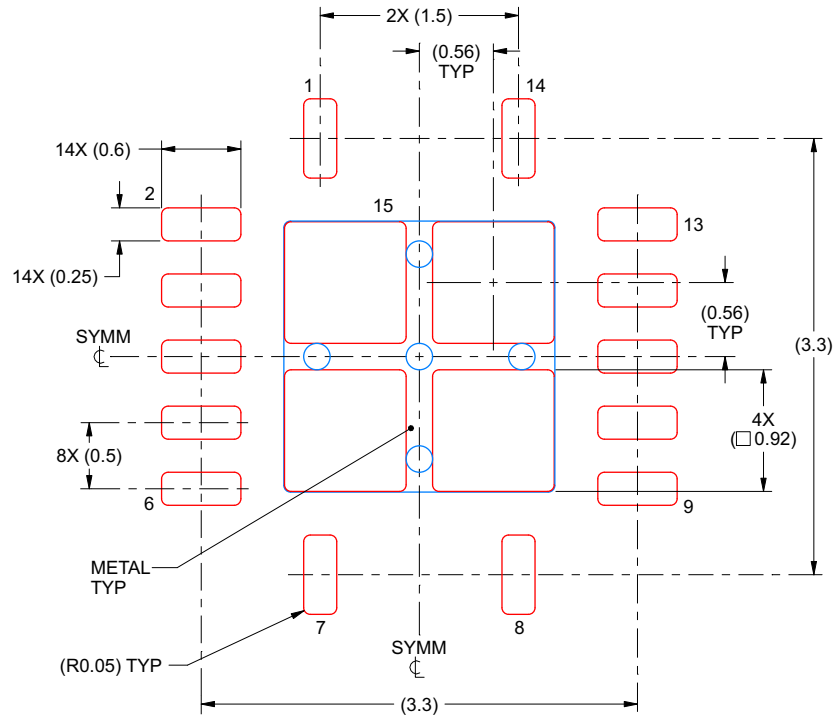

**SOLDER PASTE EXAMPLE**  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 15  
80% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE:20X

4223385/A 11/2016

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## PACKAGING INFORMATION

| Orderable part number        | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TUSB215IRGYR</a> | Active        | Production           | VQFN (RGY)   14 | 3000   LARGE T&R      | Yes         | SN                                   | Level-2-260C-1 YEAR               | -40 to 85    | USB215              |
| TUSB215IRGYR.A               | Active        | Production           | VQFN (RGY)   14 | 3000   LARGE T&R      | Yes         | SN                                   | Level-2-260C-1 YEAR               | -40 to 85    | USB215              |
| <a href="#">TUSB215IRGYT</a> | Active        | Production           | VQFN (RGY)   14 | 250   SMALL T&R       | Yes         | SN                                   | Level-2-260C-1 YEAR               | -40 to 85    | USB215              |
| TUSB215IRGYT.A               | Active        | Production           | VQFN (RGY)   14 | 250   SMALL T&R       | Yes         | SN                                   | Level-2-260C-1 YEAR               | -40 to 85    | USB215              |
| <a href="#">TUSB215RGYR</a>  | Active        | Production           | VQFN (RGY)   14 | 3000   LARGE T&R      | Yes         | SN                                   | Level-2-260C-1 YEAR               | 0 to 70      | USB215              |
| TUSB215RGYR.A                | Active        | Production           | VQFN (RGY)   14 | 3000   LARGE T&R      | Yes         | SN                                   | Level-2-260C-1 YEAR               | 0 to 70      | USB215              |
| <a href="#">TUSB215RGYT</a>  | Active        | Production           | VQFN (RGY)   14 | 250   SMALL T&R       | Yes         | SN                                   | Level-2-260C-1 YEAR               | 0 to 70      | USB215              |
| TUSB215RGYT.A                | Active        | Production           | VQFN (RGY)   14 | 250   SMALL T&R       | Yes         | SN                                   | Level-2-260C-1 YEAR               | 0 to 70      | USB215              |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TUSB215 :**

- Automotive : [TUSB215-Q1](#)

NOTE: Qualified Version Definitions:


- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

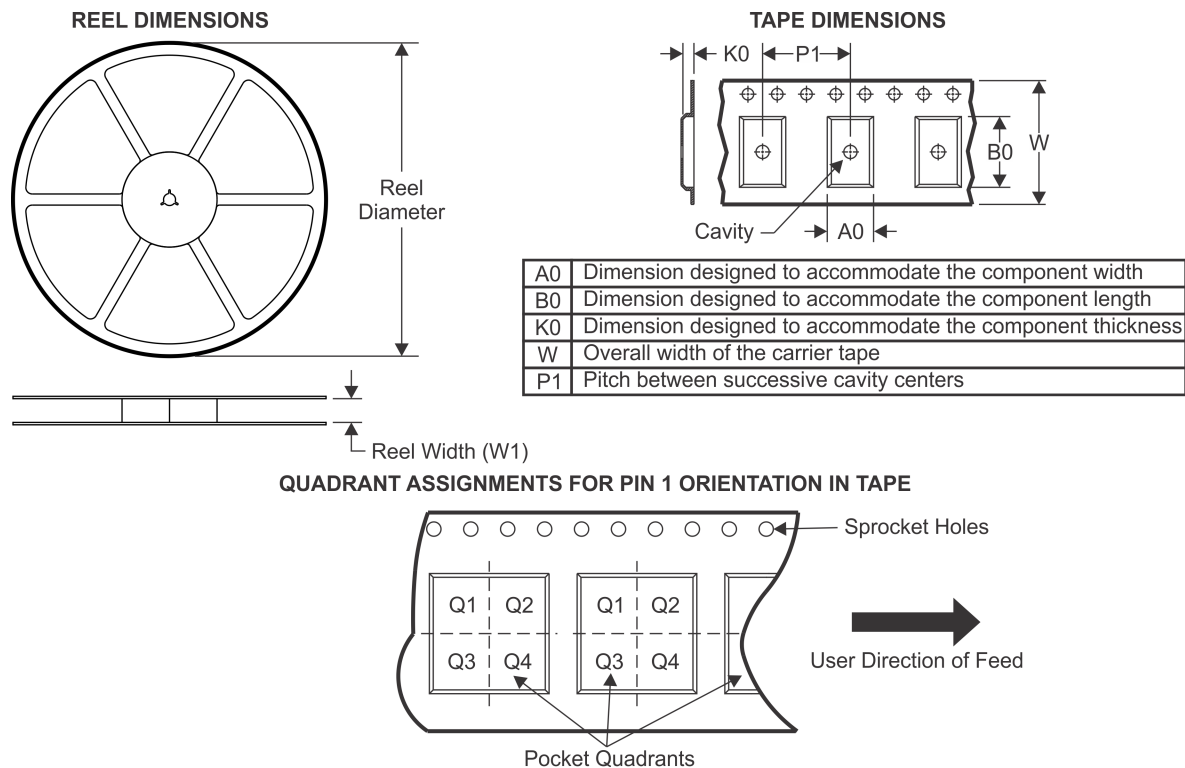**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TUSB215IRGYR | VQFN         | RGY             | 14   | 3000 | 330.0              | 12.4               | 3.75    | 3.75    | 1.15    | 8.0     | 12.0   | Q2            |
| TUSB215IRGYT | VQFN         | RGY             | 14   | 250  | 180.0              | 12.4               | 3.75    | 3.75    | 1.15    | 8.0     | 12.0   | Q2            |
| TUSB215RGYR  | VQFN         | RGY             | 14   | 3000 | 330.0              | 12.4               | 3.75    | 3.75    | 1.15    | 8.0     | 12.0   | Q2            |
| TUSB215RGYT  | VQFN         | RGY             | 14   | 250  | 180.0              | 12.4               | 3.75    | 3.75    | 1.15    | 8.0     | 12.0   | Q2            |

## TAPE AND REEL BOX DIMENSIONS

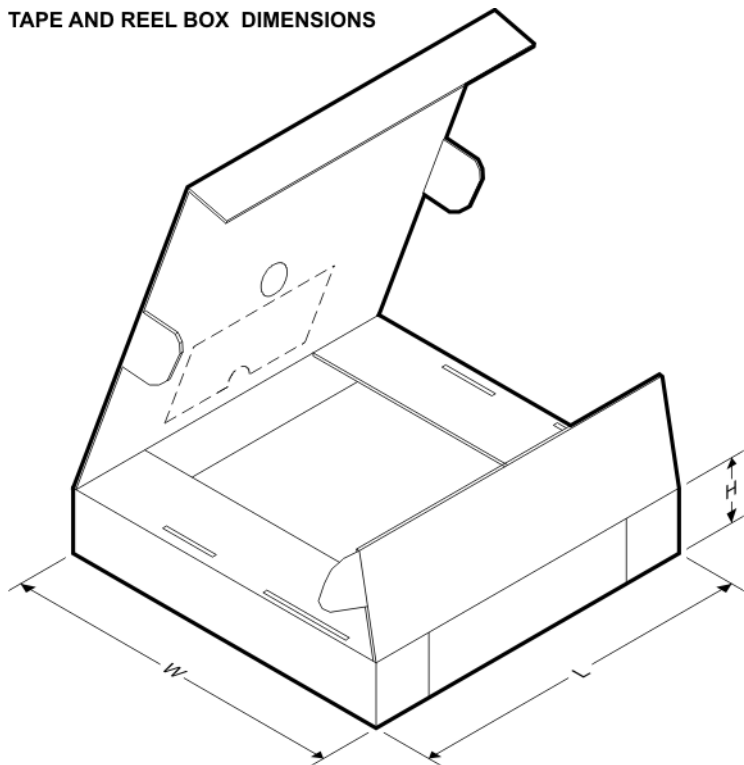

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TUSB215IRGYR | VQFN         | RGY             | 14   | 3000 | 367.0       | 367.0      | 38.0        |
| TUSB215IRGYT | VQFN         | RGY             | 14   | 250  | 213.0       | 191.0      | 35.0        |
| TUSB215RGYR  | VQFN         | RGY             | 14   | 3000 | 367.0       | 367.0      | 38.0        |
| TUSB215RGYT  | VQFN         | RGY             | 14   | 250  | 213.0       | 191.0      | 35.0        |

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated