

TPS22950-Q1 5-V, 2.7-A, 34-mΩ Automotive Load Switch With Adjustable Current Limit

1 Features

- Qualified for automotive applications
- AEC-Q100 qualified:
 - Device temperature grade 1: -40°C to 125°C ambient operating temperature range
- Input operating voltage range (V_{IN}): 1.8 V – 5.5 V
- Output current limit (I_{LIMIT}): 0.05 A – 3.5 A (typ)
- Thermal shutdown (TSD)
- ON-resistance (R_{ON}):
 - R_{ON} at $V_{\text{IN}} = 5\text{ V}$: 34 mΩ (typ)
 - R_{ON} at $V_{\text{IN}} = 3.3\text{ V}$: 41 mΩ (typ)
- Slow turn-ON timing limits inrush current (typ):
 - t_{ON} at $V_{\text{IN}} = 5\text{ V}$: 832 μs
 - t_{ON} at $V_{\text{IN}} = 3.3\text{ V}$: 695 μs
- Always-ON true reverse current blocking (RCB)
- Fault indication (FLT)
- Quick output discharge (QOD): 130 Ω
- Smart ON pin pulldown ($R_{\text{PD,ON}}$):
 - $\text{ON} \geq V_{\text{IH}}$ (I_{ON}): 50 nA (max)
 - $\text{ON} \leq V_{\text{IL}}$ ($R_{\text{PD,ON}}$): 500 kΩ (typ)
- Low power consumption:
 - ON state (I_{Q}): 40 μA (typ)
 - OFF state (I_{SD}): 0.2 μA (typ)
- UL 2367 recognition – file no. E169910
 - Certified from $I_{\text{LIM}} = 66\text{ mA}$ to 2.46 A

2 Applications

- [Infotainment and cluster head unit](#)
- [Automotive cluster display](#)
- [ADAS surround view system ECU](#)
- [Body control module and gateway](#)

3 Description

The TPS22950-Q1 is a small, single channel load switch with robust protection against fault cases with adjustable output current limiting, reverse current blocking, and thermal shutdown.


The switch ON state is controlled by a digital input that is capable of interfacing directly with low-voltage control signals. When power is first applied, a smart pulldown is used to keep the ON pin from floating until system sequencing is complete. After the pin is deliberately driven high ($>V_{\text{IH}}$), the smart pulldown is disconnected to prevent unnecessary power loss.

TPS22950-Q1 is available in a standard SOT package characterized for operation over an ambient temperature range of -40°C to 125°C .

Package Information

PART NUMBER ⁽¹⁾	PACKAGE	BODY SIZE (NOM)
TPS22950-Q1	DDC (SOT, 6)	2.90 mm × 2.80 mm

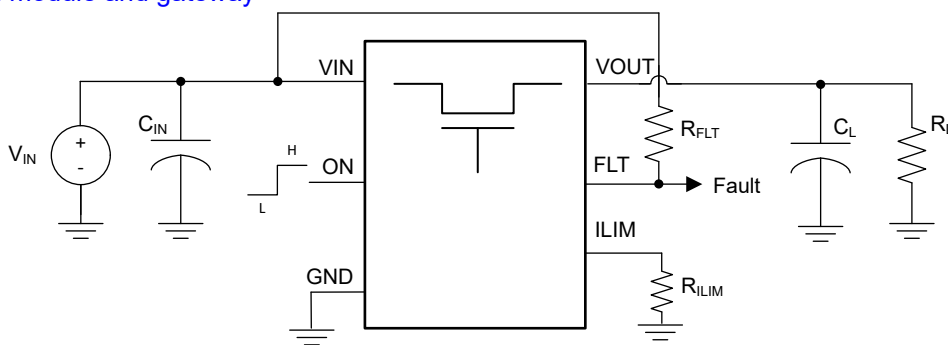(1) For all available packages, see the orderable addendum at the end of the data sheet.



Typical Application



Table of Contents

1 Features	1	8.2 Functional Block Diagram.....	10
2 Applications	1	8.3 Feature Description.....	10
3 Description	1	8.4 Device Functional Modes.....	12
4 Revision History	2	9 Application and Implementation	13
5 Pin Configuration and Functions	3	9.1 Application Information.....	13
6 Specifications	4	9.2 Typical Application.....	13
6.1 Absolute Maximum Ratings.....	4	9.3 Power Supply Recommendations.....	14
6.2 ESD Ratings.....	4	9.4 Layout.....	14
6.3 Recommended Operating Conditions.....	4	10 Device and Documentation Support	16
6.4 Thermal Information.....	4	10.1 Receiving Notification of Documentation Updates..	16
6.5 Electrical Characteristics.....	5	10.2 Support Resources.....	16
6.6 Switching Characteristics.....	6	10.3 Trademarks.....	16
6.7 Typical Characteristics.....	7	10.4 Electrostatic Discharge Caution.....	16
7 Parameter Measurement Information	9	10.5 Glossary.....	16
8 Detailed Description	10	11 Mechanical, Packaging, and Orderable Information	17
8.1 Overview.....	10		

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision * (September 2022) to Revision A (December 2022)	Page
• Changed device status from <i>Advance Information</i> to <i>Production Data</i>	1

5 Pin Configuration and Functions

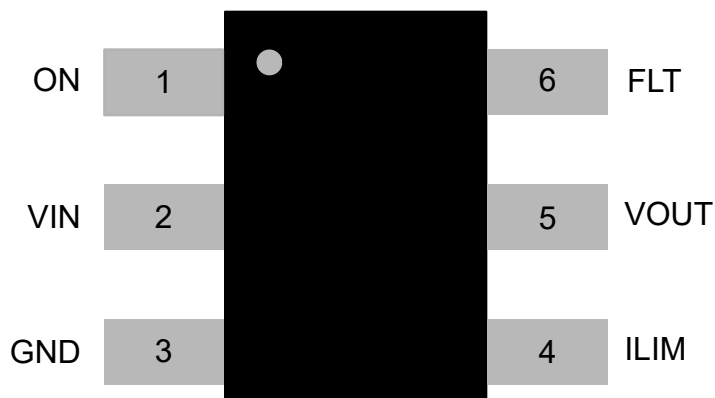


Figure 5-1. TPS22950-Q1, DDC Package 6-Pin SOT (Top View)

Table 5-1. Pin Functions

PIN		I/O ⁽¹⁾	DESCRIPTION
NAME	NO.		
ON	1	I	Active high switch control input. Do not leave floating
VIN	2	I	Switch Input
GND	3	GND	Device Ground
ILIM	4	O	Adjusts device current limit through a resistor to ground
VOUT	5	O	Switch Output
FLT	6	O	Open-drain output, pulled low during thermal shutdown or reverse current-conditions

(1) Signal Types: I = Input, O = Output, GND = Ground.

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
V _{IN}	Maximum Input Voltage Range	−0.3	6	V
V _{OUT}	Maximum Output Voltage Range	−0.3	6	V
V _{ON}	Maximum ON Pin Voltage Range	−0.3	6	V
V _{FLT}	Maximum FLT Pin Voltage	−0.3	6	V
I _{MAX}	Maximum Continuous Output Current		2.7	A
I _{MAX,PLS}	Maximum Pulsed Output Current (T _J = 85°C, duty cycle = 2%)		4.1	A
T _{STG}	Storage temperature	−65	150	°C
T _{LEAD}	Maximum Lead Temperature (10 s soldering time)		300	°C

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

6.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human-body model (HBM), per AEC Q100-002 ⁽¹⁾ HBM ESD classification level 1C	±2000	V
		Charged-device model (CDM), per AEC Q100-011 CDM ESD classification level C4A	±500	

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	TYP	MAX	UNIT
V _{IN}	Input Voltage Range	1.8		5.5	V
V _{OUT}	Output Voltage Range	0		5.5	V
V _{IH}	ON Pin High Voltage Range	1		5.5	V
V _{IL}	ON Pin Low Voltage Range	0		0.35	V
I _{LIM}	Output Current Limit	0.05		3.5	A
T _A	Ambient temperature	−40		125	°C
T _J	Junction temperature	−40		150	°C

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TPS22950-Q1	UNIT
		DDC(SOT)	
		6 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	104.8	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	57.6	°C/W
R _{θJB}	Junction-to-board thermal resistance	36.3	°C/W
Ψ _{JT}	Junction-to-top characterization parameter	12.8	°C/W

6.4 Thermal Information (continued)

THERMAL METRIC ⁽¹⁾		TPS22950-Q1	UNIT
		DDC(SOT)	
		6 PINS	
Ψ_{JB}	Junction-to-board characterization parameter	36.0	°C/W

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.5 Electrical Characteristics

Unless otherwise noted, the characteristics in the following table apply across the recommended operating input voltage range with a load of $C_L = 0.1 \mu F$, $R_L = 100 \Omega$. Typical Values are at 5V and $T_A = 25^\circ C$.

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
Input Supply (VIN)							
IQ, VIN	VIN Quiescent Current	VON ≥ VIH, VOUT = Open	−40 °C to 85 °C	40	60		μA
			−40 °C to 125 °C		60		μA
ISD, VIN	VIN Shutdown Current	VON ≤ VIL, VOUT = GND	25 °C	0.2	0.4		μA
			−40 °C to 85 °C		9		μA
			−40 °C to 125 °C		46		μA
ON-Resistance (RON)							
RON	ON-State Resistance	VIN = 5V, IOUT = -200 mA	25 °C	34	41		mΩ
			−40 °C to 85 °C		49		mΩ
			−40 °C to 125 °C		54		mΩ
RON	ON-State Resistance	VIN = 3.3V, IOUT = -200 mA	25 °C	41	51		mΩ
			−40 °C to 85 °C		62		
			−40 °C to 125 °C		68		
RON	ON-State Resistance	VIN = 1.8V, IOUT = -200 mA	25 °C	65	90		mΩ
			−40 °C to 85 °C		105		mΩ
			−40 °C to 125 °C		116		mΩ
Output Current Limit (ILIM)							
ILIM	Output Current Limit	RI LIM = 610Ω VOUT - VIN = 0.3V	−40 °C to 125 °C	1.54	2	2.46	A
		RI LIM = 1.15kΩ VOUT - VIN = 0.3V	−40 °C to 125 °C	0.75	1	1.25	A
		RI LIM = 2.21kΩ VOUT - VIN = 0.3V	−40 °C to 125 °C	0.38	0.5	0.62	A
		RI LIM = 19.2kΩ VOUT - VIN = 0.3V	−40 °C to 125 °C	0.034	0.05	0.066	A
tLIM	Current Limit Response Time	Output hard short (IOUT > ILIM)	−40 °C to 125 °C	5			μs
Reverse Current Blocking (RCB)							
VRCB	Activation Threshold	VOUT Rising; VOUT > VIN	−40 °C to 125 °C	44			mV
	Release Threshold	VOUT Falling; VOUT > VIN	−40 °C to 125 °C	16			mV
tRCB	Response Time	VOUT = VIN + 1V	−40 °C to 125 °C	3			μs
IOUT,RCB	Reverse Leakage Current into VOUT	VON ≤ VIL VIN = 0V, VOUT = 5V	−40 °C to 125 °C		38		μA
Fault Indication (FLT)							
VOL, FLT	Output Low Voltage	IFLT = 1 mA	−40 °C to 125 °C		0.1		V
tD,FLT	Fault Delay Time	VON ≥ VIH	−40 °C to 125 °C	10			μs
IFLT	Off State Leakage	VON ≤ VIL	−40 °C to 125 °C		50		nA

6.5 Electrical Characteristics (continued)

Unless otherwise noted, the characteristics in the following table apply across the recommended operating input voltage range with a load of $C_L = 0.1 \mu\text{F}$, $R_L = 100 \Omega$. Typical Values are at 5V and $T_A = 25^\circ\text{C}$.

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
Enable Pin (ON)							
R _{PD, ON}	Smart Pull Down Resistance	V _{ON} ≤ V _{IL}	−40 °C to 125 °C	500	650		kΩ
I _{ON}	ON Pin Leakage	V _{ON} ≥ V _{IH}	−40 °C to 125 °C		50		nA
R _{QOD}	Quick Output Discharge Resistance	V _{IN} = 5V V _{ON} ≤ V _{IL}	−40 °C to 125 °C	120	160		Ω
R _{QOD}	Quick Output Discharge Resistance	V _{IN} = 3.3V V _{ON} ≤ V _{IL}	−40 °C to 125 °C	130	185		Ω
R _{QOD}	Quick Output Discharge Resistance	V _{IN} = 1.8V V _{ON} ≤ V _{IL}	−40 °C to 125 °C	200	355		Ω
Thermal Shutdown (TSD)							
TSD	Thermal Shutdown	Rising	N/A	170			°C
		Falling (Hysteresis)	N/A	150			°C

6.6 Switching Characteristics

Unless otherwise noted, the typical characteristics in the following table applies at 25°C with a load of $C_L = 1 \mu\text{F}$, $R_L = 100 \Omega$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{ON}	Turn ON Time	$V_{IN} = 5\text{V}$		1037		μs
t_{ON}	Turn ON Time	$V_{IN} = 3.3\text{V}$		892		μs
t_{ON}	Turn ON Time	$V_{IN} = 1.8\text{V}$		730		μs
t_R	Output Rise Time	$V_{IN} = 5\text{V}$		621		μs
t_R	Output Rise Time	$V_{IN} = 3.3\text{V}$		474		μs
t_R	Output Rise Time	$V_{IN} = 1.8\text{V}$		313		μs
t_D	Output Delay Time	$V_{IN} = 5\text{V}$		415		μs
t_D	Output Delay Time	$V_{IN} = 3.3\text{V}$		415		μs
t_D	Output Delay Time	$V_{IN} = 1.8\text{V}$		415		μs
t_{OFF}	Turn OFF Time	$V_{IN} = 5\text{V}$		19		μs
t_{OFF}	Turn OFF Time	$V_{IN} = 3.3\text{V}$		14		μs
t_{OFF}	Turn OFF Time	$V_{IN} = 1.8\text{V}$		16		μs
t_{FALL}	Output Fall Time	$V_{IN} = 5\text{V}$		118		μs
t_{FALL}	Output Fall Time	$V_{IN} = 3.3\text{V}$		120		μs
t_{FALL}	Output Fall Time	$V_{IN} = 1.8\text{V}$		130		μs

6.7 Typical Characteristics

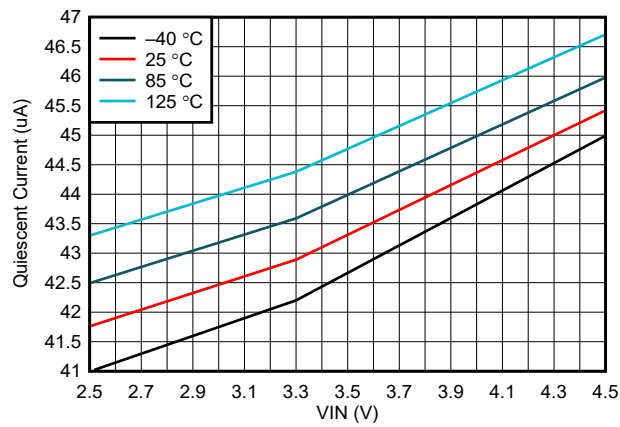


Figure 6-1. Quiescent Current vs Input Voltage

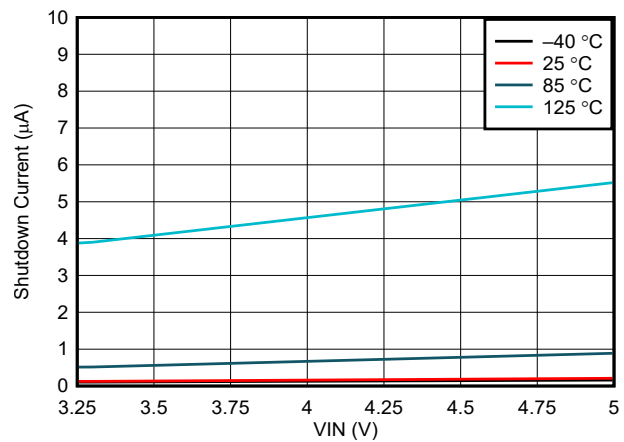


Figure 6-2. Shutdown Current vs Input Voltage

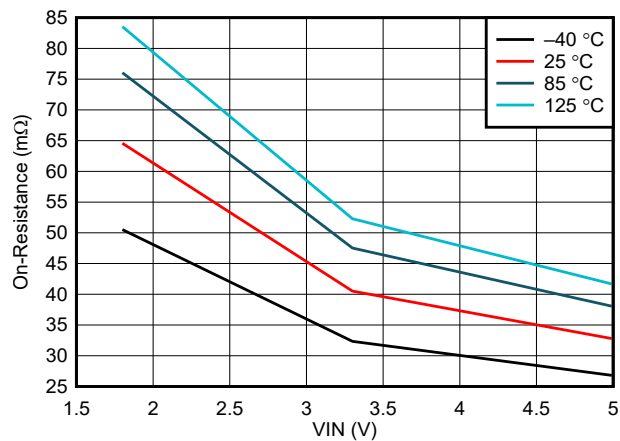


Figure 6-3. On-Resistance vs Input Voltage

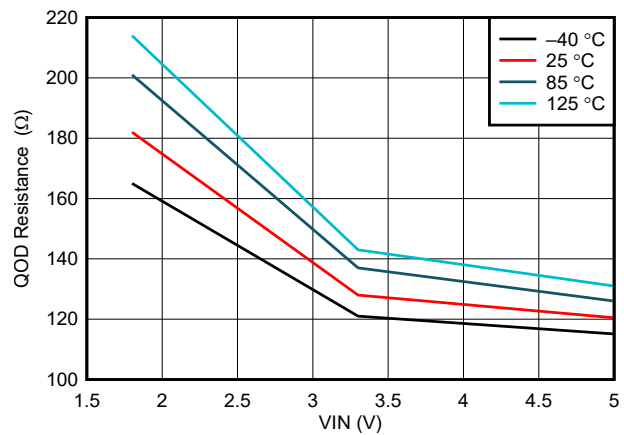


Figure 6-4. QOD Resistance vs Input Voltage

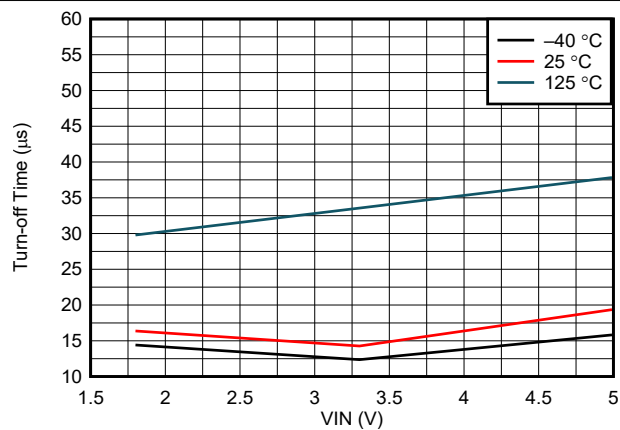


Figure 6-5. Turn-off Time vs Input Voltage

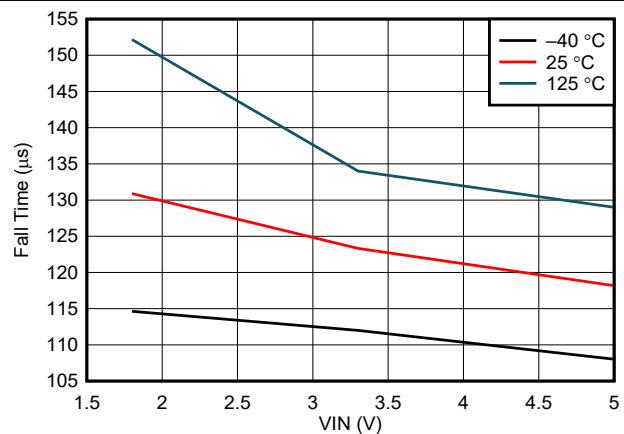


Figure 6-6. Fall Time vs Input Voltage

6.7 Typical Characteristics (continued)


 $C_L = 0.1\mu\text{F}$

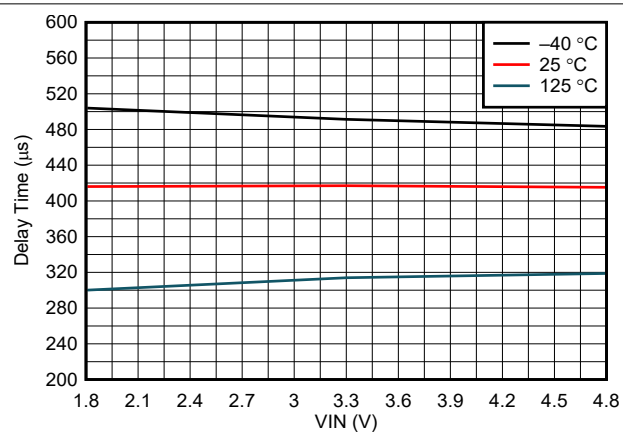Figure 6-7. Delay Time vs Input Voltage

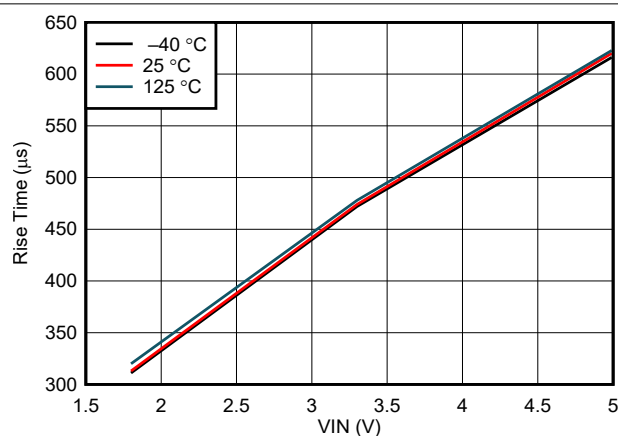
 $C_L = 0.1\mu\text{F}$

Figure 6-8. Rise Time vs Input Voltage

7 Parameter Measurement Information

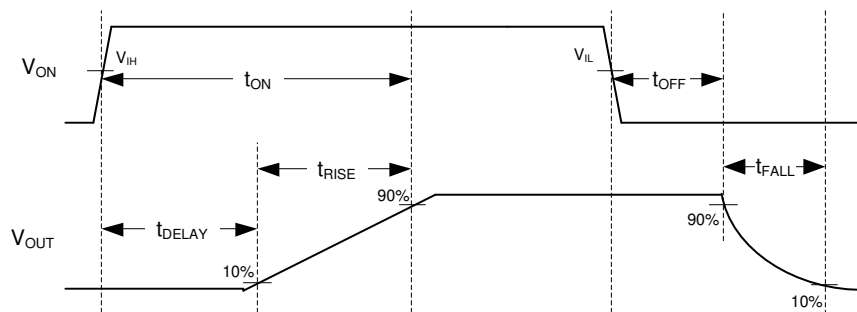



Figure 7-1. Timing Waveform

8 Detailed Description

8.1 Overview

The TPS22950-Q1 is a single channel load switch with a 34-mΩ power MOSFET capable of driving loads up to 2.7 A. While on, the device provides protection against fault cases through its adjustable output current limiting and thermal shutdown. The TPS22950-Q1 responds to overcurrent events with auto-retry behavior. The TPS22950 also provides reverse current blocking for when VOUT exceeds VIN. The switch ON state is controlled by a digital input that is capable of interfacing directly with low-voltage control signals, and a smart pulldown is used to keep the ON pin from floating until system sequencing is complete. When the device is turned off, quick output discharge is enabled, pulling the output voltage down to 0 V through a resistive path to GND.

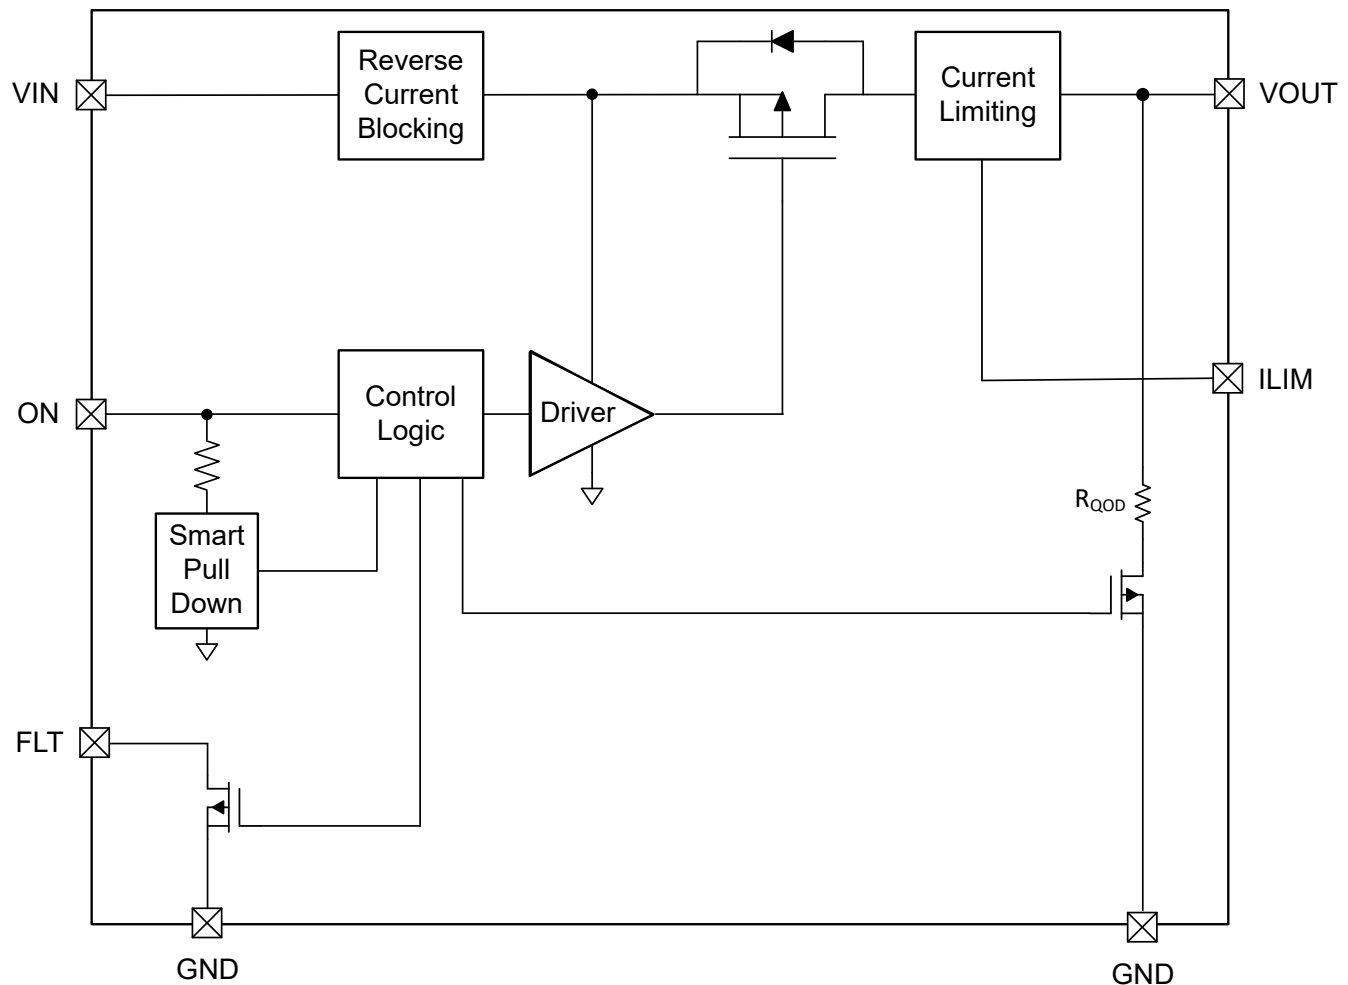8.2 Functional Block Diagram



8.3 Feature Description

8.3.1 Current Limiting

The TPS22950-Q1 responds to overcurrent conditions by limiting its output current to the I_{LIM} level shown in [Figure 8-1](#).

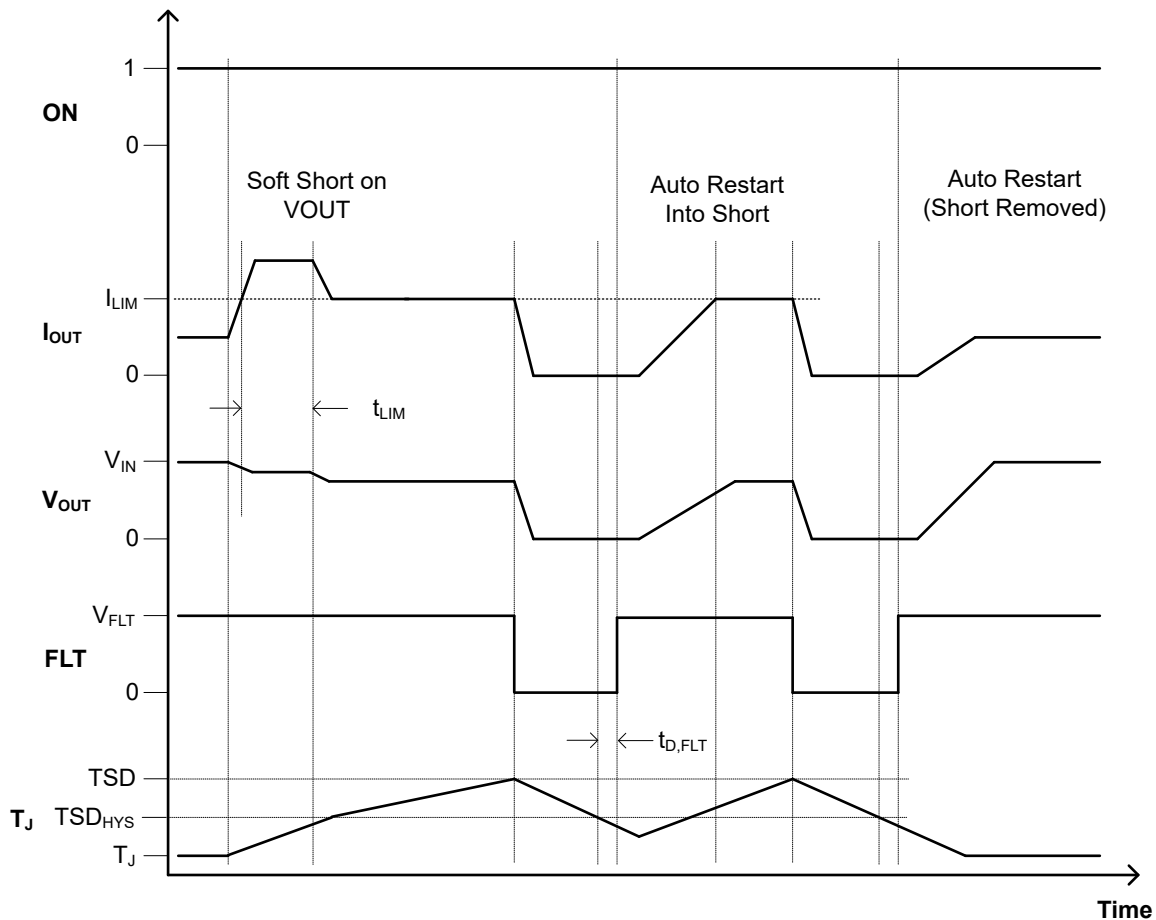
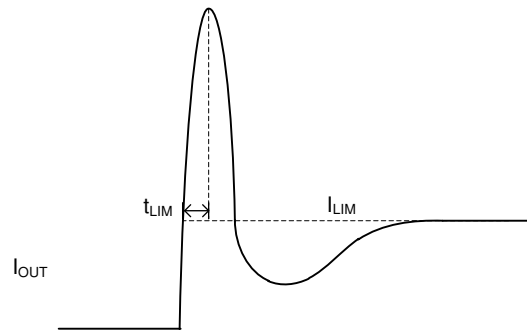


Figure 8-1. Output Current Limit for Short-Circuit Protection (t_{LIM})

When an overcurrent condition is detected, the device maintains a constant output current and reduces the output voltage accordingly. Two possible overload conditions can occur.

The first condition is when a short circuit or partial short circuit is present on the output and the ON pin is toggled high, turning the device on. The output voltage is held near zero potential with respect to ground and the TPS22950-Q1 ramps the output current to I_{LIM} . The TPS22950-Q1 device limits the current to I_{LIM} until the overload condition is removed or the internal junction temperature of the device reaches thermal shutdown and the device turns itself off. The device remains off until the junction temperature has lowered to TSD_{HYS} , and the device turns itself back on. This action cycles until the overload condition is removed.

The second condition is when a short circuit, partial short circuit, or transient overload occurs after the device has been fully powered on. The device responds to the overcurrent condition within time t_{LIM} , as shown in [Figure 8-2](#), and before the current is able to exceed I_{LIM} . In the case of a fast transient, the current-sense amplifier is overdriven and momentarily disables the internal power FET. The current-sense amplifier recovers and limits the output current to I_{LIM} . Similar to the previous case, the TPS22950-Q1 limits the current to I_{LIM} until the overload condition is removed or the internal junction temperature of the device reaches thermal shutdown and begins thermally cycling on and off.

**Figure 8-2. Transient Current Limit Waveform****8.3.1.1 Adjusting the Current Limit**

The current limit is adjusted by connecting an external resistor from the ILIM pin to GND. Use [Equation 1](#) to choose the current limit resistor:

$$I_{LIM} = 1.18 \times (R_{ILIM})^{-1.072} \quad (1)$$

8.3.2 Reverse Current Blocking (RCB)

In a scenario where the device is enabled and V_{OUT} is greater than V_{IN} , there is potential for reverse current to flow through the pass FET or the body diode. When the reverse current threshold is exceeded (about 900 mA), there is a delay time (t_{RCB}) before the switch turns off to stop the current flow. The switch remains off and block reverse current as long as the reverse voltage condition exists. After V_{OUT} has dropped below the release voltage threshold (V_{RCB}) the device turns back on. When the ON pin is pulled low, the device constantly blocks reverse current.

8.4 Device Functional Modes

[Table 8-1](#) summarizes the device functional modes.

Table 8-1. Output Connection Table

ON	Fault Condition	VOUT State	FLT State
L	N/A	Hi-Z	Hi-Z
H	None	VIN (through R_{ON})	Hi-Z
H	Output short	Current limited	Hi-Z
H	Thermal shutdown	Hi-Z	L
H	Reverse current	Hi-Z	L

**Table 8-2. Smart
ON Functional Modes
($R_{PD,ON}$)**

ON	ON Pin
$\leq V_{IL}$	Pulldown active
$\geq V_{IH}$	No pulldown

9 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

This section highlights some of the design considerations when implementing this device in various applications.

9.2 Typical Application

This typical application demonstrates how the TPS22950-Q1 device can be used to set an adjustable current limit.

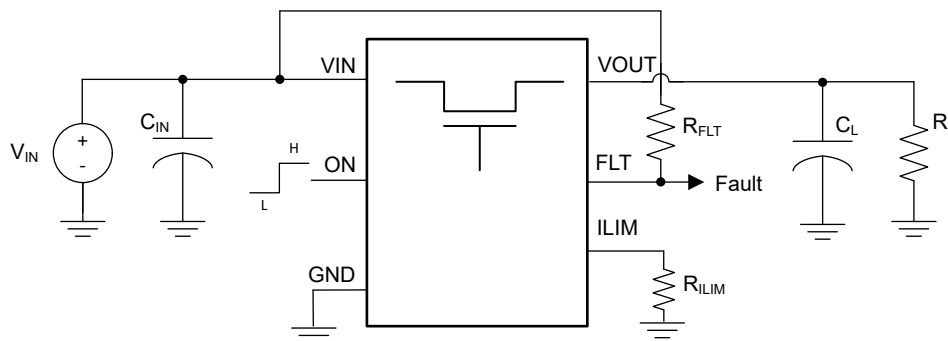


Figure 9-1. Typical Application

9.2.1 Design Requirements

For this example, the values in [Table 9-1](#) are used as the design parameters.

Table 9-1. Design Parameters

PARAMETER	VALUE
Input voltage (V_{IN})	5 V
Load current (mA)	100 mA
Typical current limit (mA)	500 mA

9.2.2 Detailed Design Procedure

In this example, the nominal load current is 100 mA, so the current limit can be set to 500 mA without disrupting normal operation. Use [Equation 2](#) to calculate the resistor needed on the ILIM pin.

$$I_{LIM} = 1.18 \times (R_{ILIM})^{-1.072} \quad (2)$$

where

- I_{LIM} = Typical current limit setting
- R_{ILIM} = Resistor on the ILIM pin

Based on [Equation 2](#), a 2.21-k Ω resistor must be used on the ILIM pin to set a typical current limit of 500 mA.

9.2.3 Application Curves

Figure 9-2 shows the device turning on into a fault condition and limiting the current to the specified amount of 500 mA.

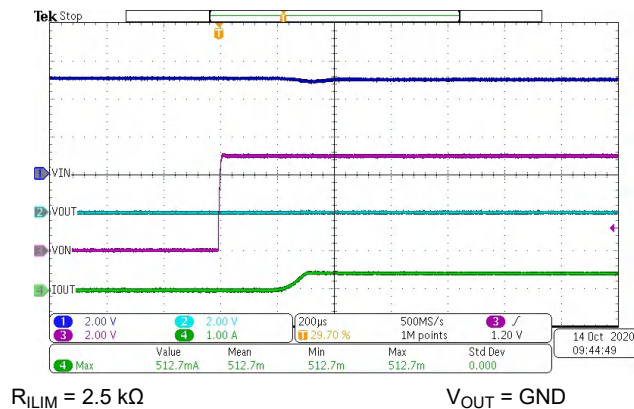


Figure 9-2. TPS22950-Q1 Turning On Into an Output Short

9.3 Power Supply Recommendations

The device is designed to operate with a VIN range of 1.8 V to 5.5 V. The VIN power supply must be well regulated and placed as close to the device terminal as possible. The power supply must be able to withstand all transient load current steps. In most situations, using an input capacitance (CIN) of 1 μF is sufficient to prevent the supply voltage from dipping when the switch is turned on. In cases where the power supply is slow to respond to a large transient current or large load current step, additional bulk capacitance can be required on the input.

9.4 Layout

9.4.1 Layout Guidelines

PCB layout is a critical piece of a good power supply design. To maximize the device performance, please use the following recommendations:

- Place R_{ILIM} as close as possible to the device and minimize the current loop to ground.
- Input and output capacitors must be placed close to the device to minimize the effects that parasitic trace inductance can have on normal operation.
- Use wide traces for VIN, VOUT, and GND. This helps minimize the parasitic electrical effects and maximizes the thermal capability of the device.

9.4.2 Layout Example

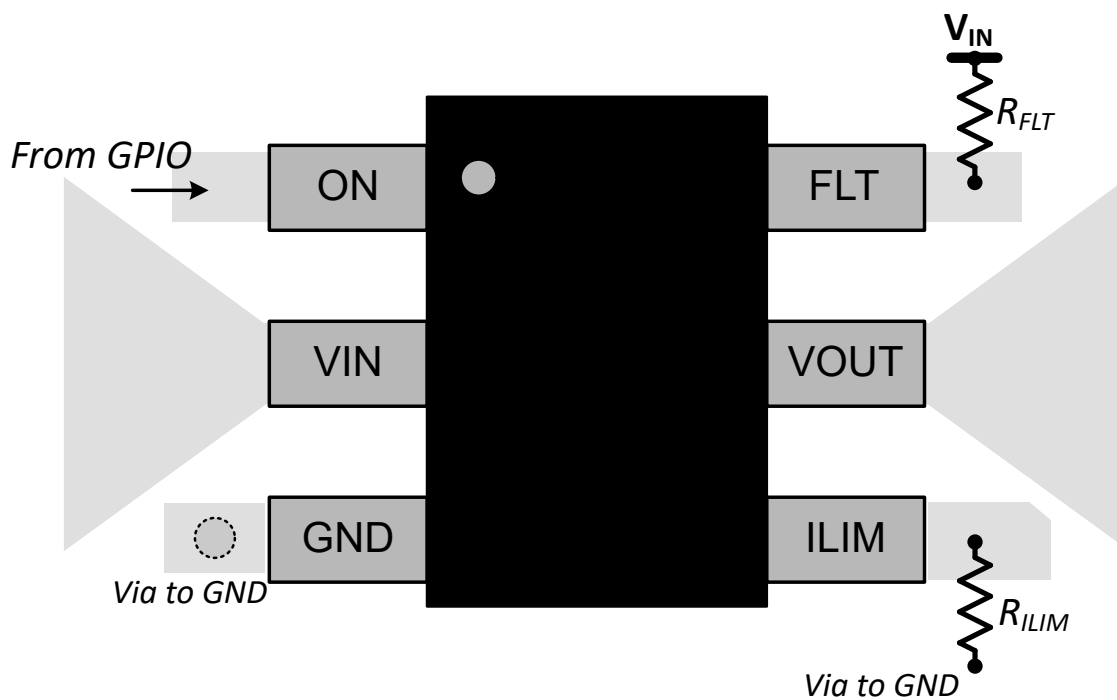


Figure 9-3. TPS22950-Q1 Layout Example

10 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

10.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

10.2 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

10.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

10.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

10.5 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
PTPS22950CQDDCRQ1	Active	Preproduction	SOT-23-THIN (DDC) 6	3000 LARGE T&R	-	Call TI	Call TI	-40 to 125	
PTPS22950CQDDCRQ1.A	Active	Preproduction	SOT-23-THIN (DDC) 6	3000 LARGE T&R	-	Call TI	Call TI	-40 to 125	
TPS22950CQDDCRQ1	Active	Production	SOT-23-THIN (DDC) 6	3000 LARGE T&R	Yes	Call TI Sn	Level-1-260C-UNLIM	-40 to 125	950Q
TPS22950CQDDCRQ1.A	Active	Production	SOT-23-THIN (DDC) 6	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	950Q

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

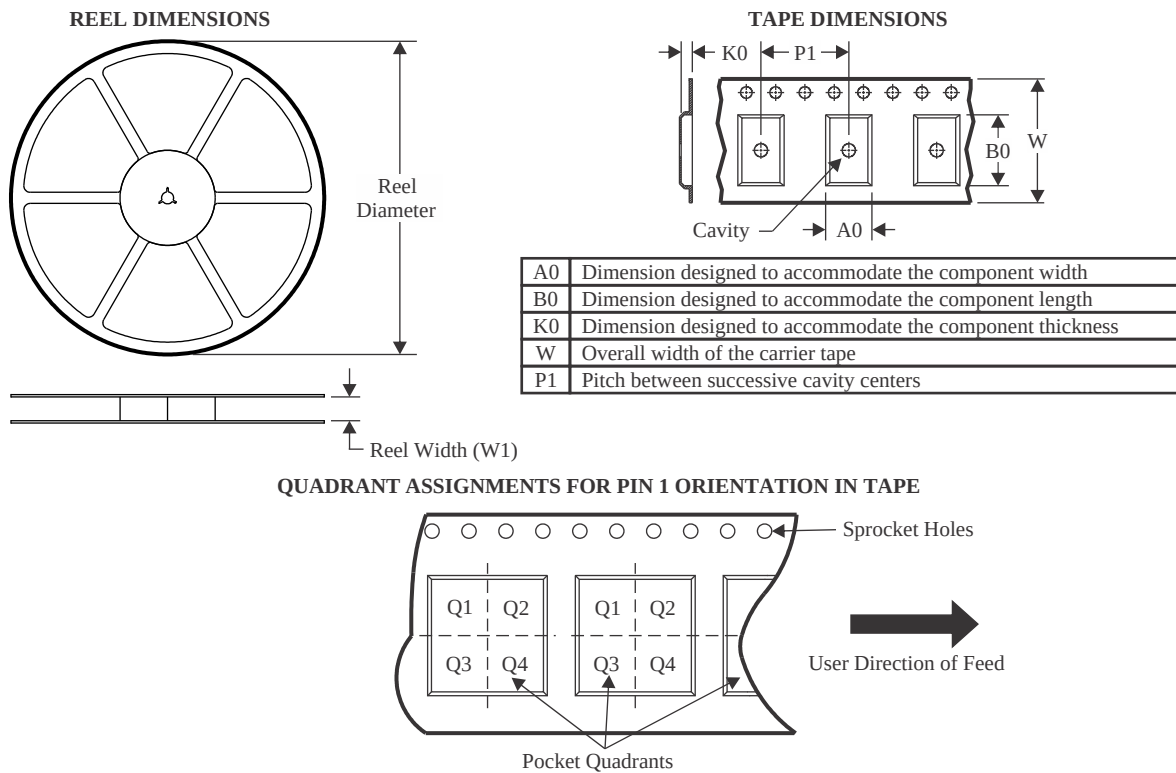
OTHER QUALIFIED VERSIONS OF TPS22950-Q1 :

- Catalog : [TPS22950](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product


TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS22950CQDDCRQ1	SOT-23-THIN	DDC	6	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3

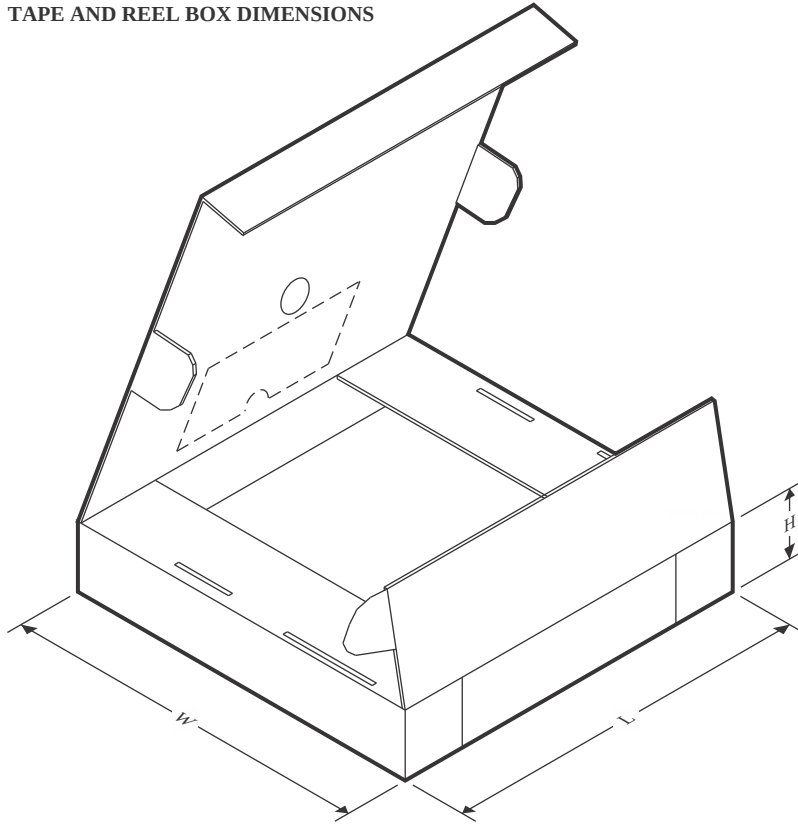TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS22950CQDDCRQ1	SOT-23-THIN	DDC	6	3000	210.0	185.0	35.0

EXAMPLE BOARD LAYOUT


DDC0006A

SOT-23 - 1.1 max height

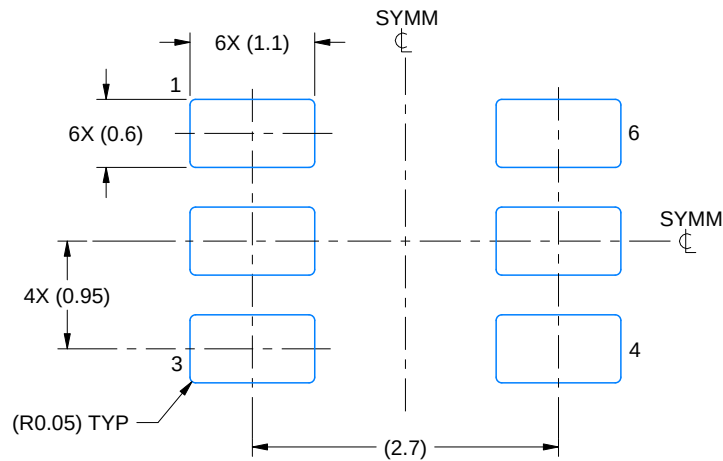SMALL OUTLINE TRANSISTOR



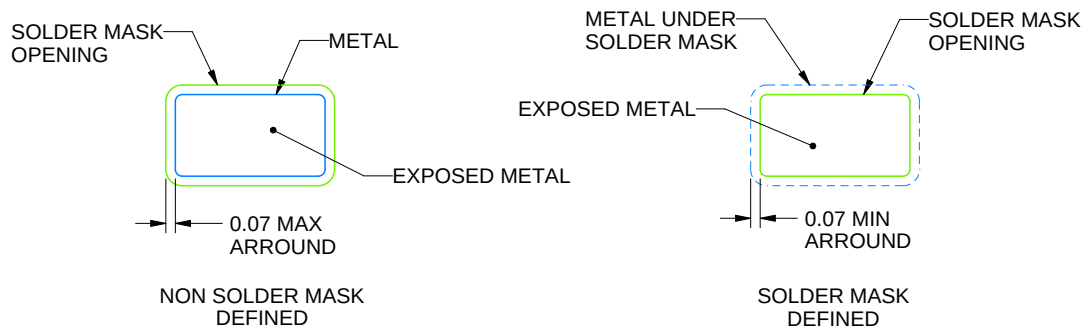LAND PATTERN EXAMPLE
EXPLODED METAL SHOWN
SCALE:15X




SOLDERMASK DETAILS

4214841/E 08/2024

NOTES: (continued)

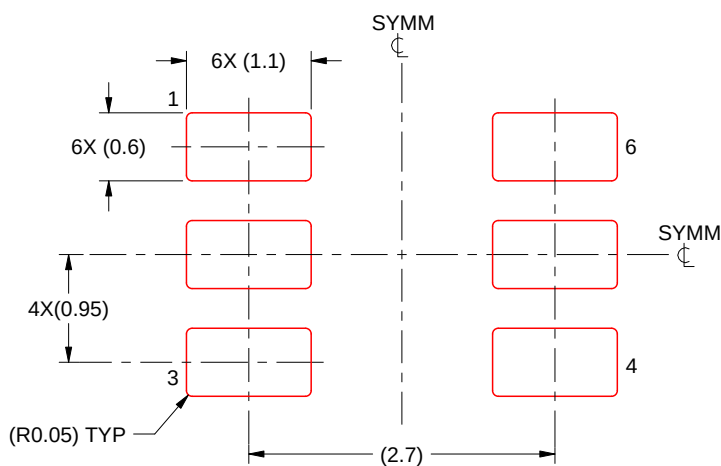4. Publication IPC-7351 may have alternate designs.
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOLDER PASTE EXAMPLE
BASED ON 0.125 THICK STENCIL
SCALE:15X

4214841/E 08/2024

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
7. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated