Dual Channel USB3.0 Redriver/Equalizer

Check for Samples: SN65LVPE502CP

FEATURES

- **Single Lane USB 3.0 Equalizer/Redriver**
- **Selectable Equalization, De-Emphasis and Output Swing Control**
- **Integrated Termination**
- **Hot-Plug Capable**
- **Low Active Power (U0 state)**
  - **315 mW (TYP), V_{CC} = 3.3V**
- **USB 3.0 Low Power Support**
  - **7 mW (TYP) When no Connection Detected**
  - **70 mW (TYP) When Link in U2/U3 Mode**
- **Excellent Jitter and Loss Compensation Capability:**
  - **>40" of Total 4 mil Stripline on FR4**
- **Small Foot Print – 24 Pin (4mm x 4mm) QFN Package**
- **High Protection Against ESD Transient**
  - **HBM: 5,000 V**
  - **CDM: 1,500 V**
  - **MM: 200 V**

APPLICATIONS

- **Notebooks, Desktops, Docking Stations, Active Cable, Backplane and Active Cable**

DESCRIPTION

The SN65LVPE502CP is a dual channel, single lane USB 3.0 redriver and signal conditioner supporting data rates of 5.0Gbps. The device complies with USB 3.0 spec revision 1.0, supporting electrical idle condition and low frequency periodic signals (LFPS) for USB 3.0 power management modes.

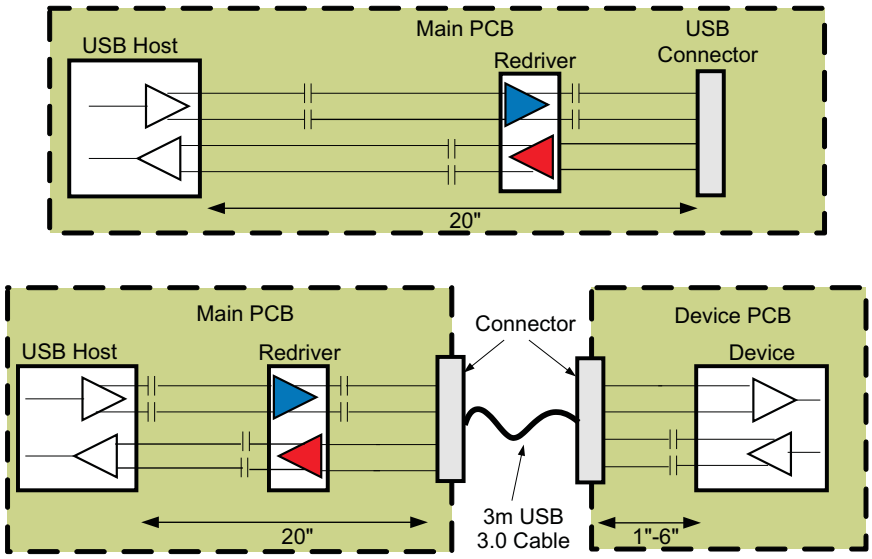

Figure 1. Typical Application

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2011–2012, Texas Instruments Incorporated

These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

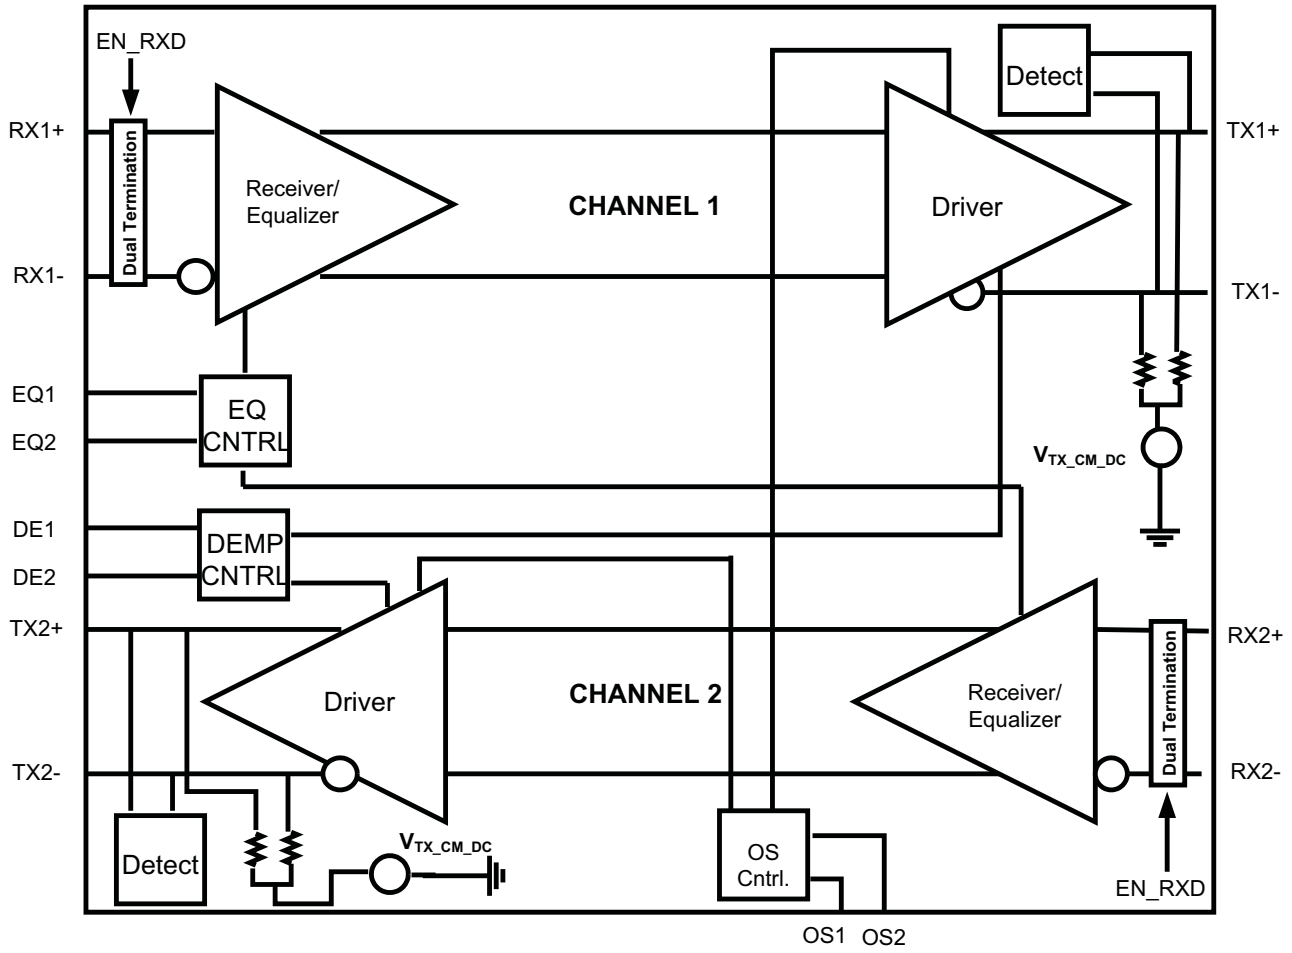

Figure 2. Data Flow Block Diagram

ORDERING INFORMATION(1)

PART NUMBER	PART MARKING	PACKAGE
SN65LVPE502CPRGER	502CP	24-pin RGE Reel (Large)
SN65LVPE502CPRGET	502CP	24-pin RGE Reel (Small)

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.

Copyright © 2011–2012, Texas Instruments Incorporated

ABSOLUTE MAXIMUM RATINGS(1)

over operating free-air temperature range (unless otherwise noted)

		VALUE		UNIT
		MIN	MAX	
Supply voltage range(2)	V_{CC}	–0.5	4	V
Voltage range	Differential I/O	–0.5	4	V
	Control I/O	–0.5	VCC + 0.5	V
Electrostatic discharge	Human body model(3)	±5000		V
	Charged-device model(4)	±1500		V
	Machine model(5)	±200		V
Continuous power dissipation		See Thermal Table		

(1) Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any conditions beyond those indicated under recommended operating conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) All voltage values, except differential voltages, are with respect to network ground terminal.
(3) Tested in accordance with JEDEC Standard 22, Test Method A114-B
(4) Tested in accordance with JEDEC Standard 22, Test Method C101-A
(5) Tested in accordance with JEDEC Standard 22, Test Method A115-A

THERMAL INFORMATION

THERMAL METRIC(1)		SN65LVPE502CP RGE PACKAGE 24 PINS	UNITS
θ_{JA}	Junction-to-ambient thermal resistance	46	°C/W
θ_{JCtop}	Junction-to-case (top) thermal resistance	42	
θ_{JB}	Junction-to-board thermal resistance	13	
θ_{JCbot}	Junction-to-case (bottom) thermal resistance	4	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, SPRA953.

THERMAL CHARACTERISTICS

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX(1)	UNIT
P_D	Device power dissipation	RSVD, EN_RXD, EQ cntrl pins = NC, K28.5 pattern at 5 Gbps, V_{ID} = 1000mV_{p-p}		330	450	mW
P_{Slp}	Device power dissipation in sleep mode	EN_RXD= GND		0.3	1	mW

(1) The maximum rating is simulated under 3.6V VCC.

Device Power

The SN65LVPE502CP is designed to operate from a single 3.3V supply.

Copyright © 2011–2012, Texas Instruments Incorporated

RECOMMENDED OPERATING CONDITIONS

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNITS
V_{CC}	Supply voltage		3	3.3	3.6	V
$C_{COUPLING}$	AC Coupling capacitor		75		200	nF
	Operating free-air temperature		0		85	°C
DEVICE PARAMETERS						
I_{CC}	Supply current	EN_RXD, RSVD, EQ cntrl = NC, K28.5 pattern at 5 Gbps, VID = 1000mVp-p		100	120	mA
$ICC_{Rx.Detect}$		In Rx.Detect mode		2	5	
ICC_{sleep}		EN_RXD = GND		0.01	0.1	
ICC_{U2-U3}		Link in USB low power state		21		
	Maximum data rate				5	Gbps
t_{ENB}	Device enable time	Sleep mode exit time EN_RXD L → H With Rx termination present			100	µs
t_{DIS}	Device disable time	Sleep mode entry time EN_RXD H → L			2	µs
$T_{RX.DETECT}$	Rx.Detect start event	Power-up time			100	µs
CONTROL LOGIC						
V_{IH}	High level input voltage		1.4		V_{CC}	V
V_{IL}	Low level input voltage		–0.3		0.5	V
V_{HYS}	Input hysteresis			150		mV
I_{IH}	High level input current	OSx, EQx, DEx = V_{CC}			30	µA
		EN_RXD = V_{CC}			1	
		RSVD = V_{CC}			30	
I_{IL}	Low level input current	OSx, EQx, DEx = GND	–30			µA
		EN_RXD = GND	–30			
		RSVD = GND	–1			

Copyright © 2011–2012, Texas Instruments Incorporated

ELECTRICAL CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNITS
RECEIVER AC/DC						
Vin_{diff_p-p}	RX1, RX2 input voltage swing	AC coupled differential RX peak to peak signal	100		1200	mVp-p
VCM_RX	RX1, RX2 common mode voltage			3.3		V
Vin_{COM_P}	RX1, RX2 AC peak common mode voltage	Measured at Rx pins with termination enabled			150	mVP
Z_{DC_RX}	DC common mode impedance		18	26	30	Ω
Z_{diff_RX}	DC differential input impedance		72	80	120	Ω
$Z_{RX_High_IMP+}$	DC Input high impedance	Device in sleep mode Rx termination not powered measured with respect to GND over 500mV max	50	85		kΩ
$V_{RX-LFPS-DETpp}$	Low voltage periodic signaling (LFPS) detect threshold	Measured at receiver pin, below minimum output is squelched, above max input signal is passed to output	100		300	mVpp
$RL_{RX-DIFF}$	Differential return loss	50 MHz – 1.25 GHz	10	11		dB
		1.25 GH – 2.5 GHz	6	7		
RL_{RX-CM}	Common mode return loss	50 MHz– 2.5 GHz	11	13		dB
TRANSMITTER AC/DC						
$V_{TXDIFF_TB_P-P}$	Differential peak-to-peak output voltage (VID = 800, 1200 mVpp, 5Gbps)	R_L = 100 Ω ±1%, DEx, OSx = NC, **Transition Bit**	800	1042	1200	mV
		R_L = 100 Ω ±1%, DEx = NC, OSx = GND **Transition Bit**		908		
		R_L = 100 Ω ±1%, DEx = NC, OSx = VCC **Transition Bit**		1127		
$V_{TXDIFF_NTB_P-P}$		R_L = 100 Ω ±1%, DEx=NC, OSx = 0,1,NC **Non-Transition Bit**		1042		mV
		R_L = 100 Ω ±1%, DEx=0 OSx = 0,1,NC **Non-Transition Bit**		661		
		R_L = 100 Ω ±1%, DEx=1 OSx = 0,1,NC **Non-Transition Bit**		507		
DE	De-emphasis level OS1,2 = NC (for OS1, 2 = 1 and 0 see Table 2)	DE1/DE2 = NC		0		dB
		DE1/DE2 = 0	–3.0	–3.5	–4.0	
		DE1/DE2 = 1		–6.0		
T_{DE}	De-emphasis width			0.85		UI
Z_{diff_TX}	DC differential impedance		72	90	120	Ω
Z_{CM_TX}	DC common mode impedance	Measured w.r.t to AC ground over 0-500mV	18	23	30	Ω
RL_{diff_TX}	Differential return loss	f = 50 MHz – 1.25 GHz	9	10		dB
		f = 1.25 GHz – 2.5 GHz	6	7		
RL_{CM_TX}	Common mode return loss	f = 50 MHz – 2.5 GHz	11	12		dB
I_{TX_SC}	TX short circuit current	TX± shorted to GND			60	mA
$V_{TX_CM_DC}$	Transmitter DC common-mode voltage		2.0	2.6	3.0	V
$V_{TX_CM_AC_Active}$	TX AC common mode voltage active			30	100	mVpp
$VT_{X_idle_diff-AC-pp}$	Electrical idle differential peak to peak output voltage	HPF to remove DC	0		10	mVpp
$V_{TX_CM_DeltaU1-U0}$	Absolute delta of DC CM voltage during active and idle states			35	200	mV
$V_{TX_idle_diff-DC}$	DC Electrical idle differential output voltage	Voltage must be low pass filtered to remove any AC component	0		10	mV
V_{detect}	Voltage change to allow receiver detect	Positive voltage to sense receiver termination			600	mV
t_R, t_F	Output rise/fall time	20%–80% of differential voltage measured 1" from the output pin	30	65		ps
t_{RF_MM}	Output rise/fall time mismatch	20%–80% of differential voltage measured 1" from the output pin		1.5	20	ps
T_{diff_LH}, T_{diff_HL}	Differential propagation delay	De-Emphasis = –3.5 dB (CH 0 and CH 1). Propagation delay between 50% level at input and output		305	370	ps
$t_{idleEntry}$, $t_{idleExit}$	Idle entry and exit times	See Figure 4		4	6	ns
C_{TX}	Tx input capacitance to GND	At 2.5 GHz		1.25		pF

Copyright © 2011–2012, Texas Instruments Incorporated

ELECTRICAL CHARACTERISTICS (continued)

over recommended operating conditions (unless otherwise noted)

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNITS
EQUALIZATION						
T_{TX-EYE} (1)(2)	**Total jitter (Tj) at point A**	Device setting: OS1 = L, DE1 = –6 dB, EQ1 = 7 dB		0.23	0.5	UI(3) p-p
DJ_{TX} (2)	Deterministic jitter (Dj)			0.14	0.3	
RJ_{TX} (2)(4)	Random jitter (Rj)			0.08	0.2	
T_{TX-EYE} (1)(2)	**Total jitter (Tj) at point B**	Device setting: OS2 = H, DE2 = –6 dB, EQ2 = 7dB		0.15	0.5	UI(3) p-p
DJ_{TX} (2)	Deterministic jitter (Dj)			0.07	0.3	
RJ_{TX} (2)(4)	Random jitter (Rj)			0.08	0.2	

(1) Includes RJ at 10^{-12} BER
(2) Determininstic jitter measured with K28.5 pattern, Random jitter measured with K28.5 pattern at the ends of reference channel in Figure 6, VID=1000mVpp, 5Gbps, –3.5dB DE from source
(3) UI = 200ps
(4) Rj calculated as 14.069 times the RMS random jitter for 10^{-12} BER

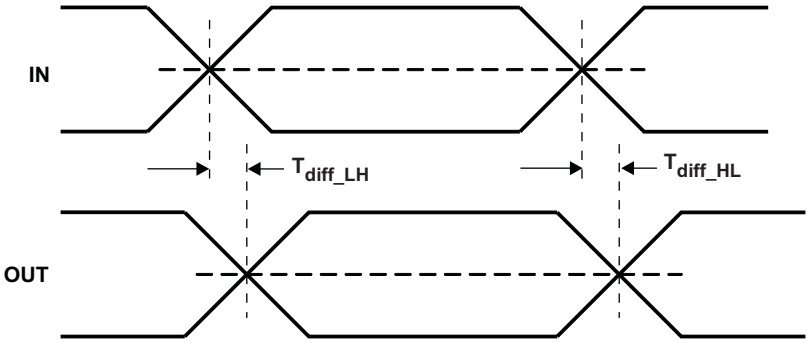

Figure 3. Propagation Delay

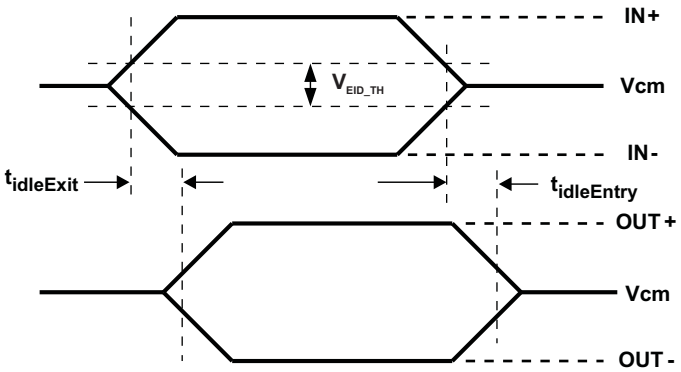

Figure 4. Electrical Idle Mode Exit and Entry Delay

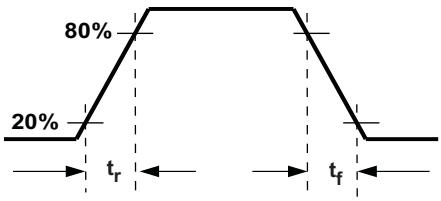

Figure 5. Ouput Rise and Fall Times

Copyright © 2011–2012, Texas Instruments Incorporated

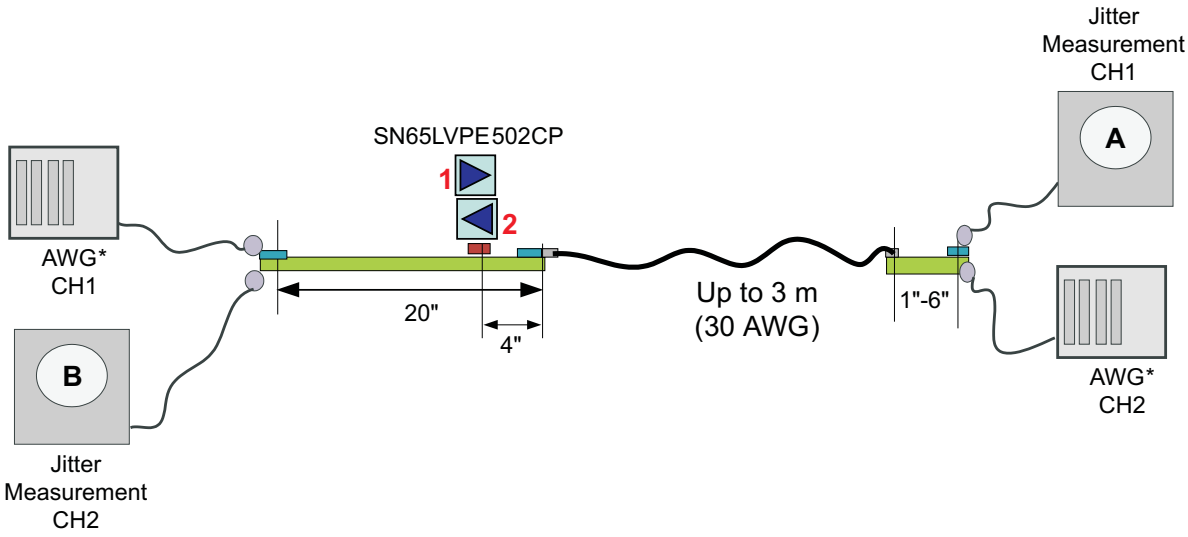

Figure 6. Jitter Measurement Setup

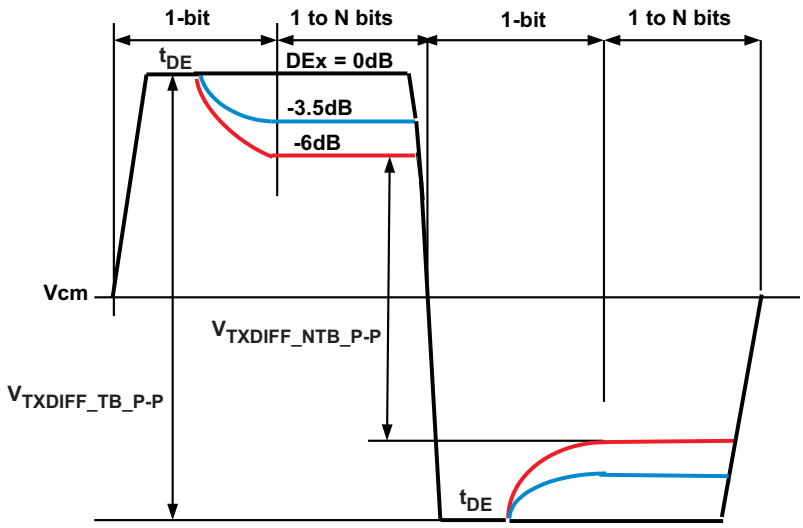

Figure 7. Output De-Emphasis Levels OSx = NC

DEVICE INFORMATION

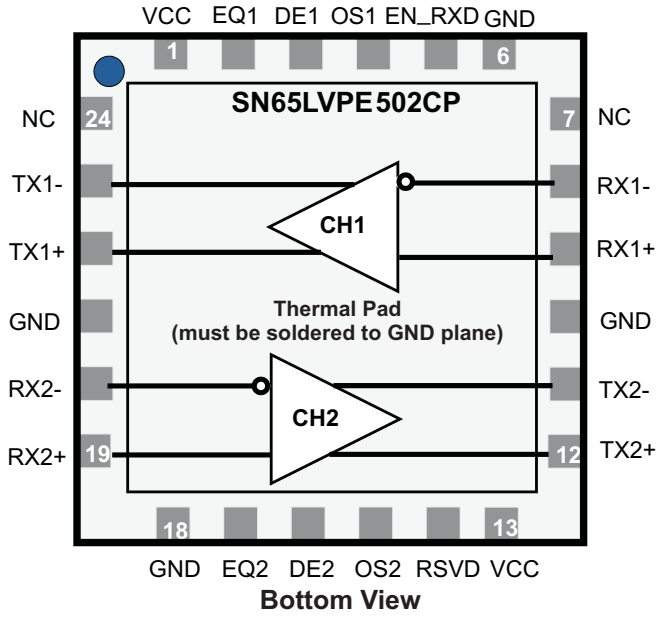

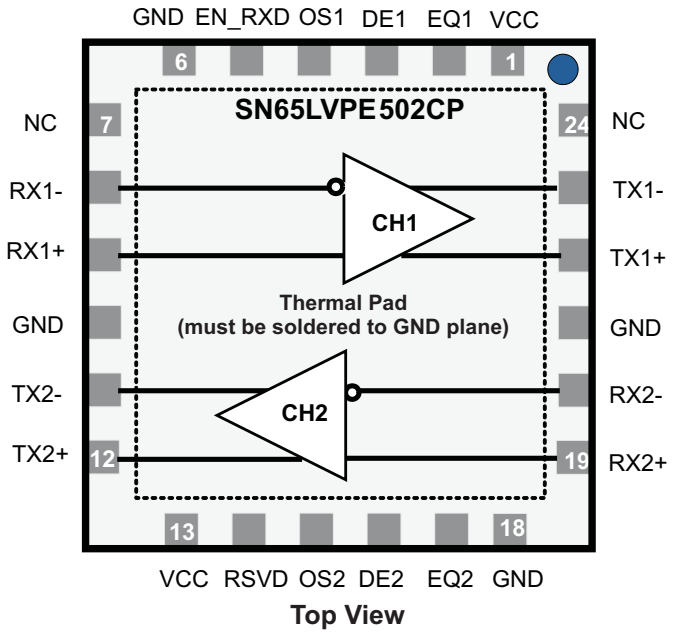

Figure 8. Flow-Through Pin-Out

Table 1. Pin Functions

PIN		I/O Type	Description
Number	Name		
HIGH SPEED DIFFERENTIAL I/O PINS			
8	RX1–	I, CML	Non-inverting and inverting CML differential input for CH 1 and CH 2. These pins are tied to an internal voltage bias by dual termination resistor circuit.
9	RX1+	I, CML	
20	RX2–	I, CML	
19	RX2+	I, CML	

Copyright © 2011–2012, Texas Instruments Incorporated

Table 1. Pin Functions (continued)

PIN		I/O Type	Description
Number	Name		
23	TX1–	O, VML	Non-inverting and inverting VML differential output for CH 1 and CH 2. These pins are internally tied to voltage bias by termination resistors.
22	TX1+	O, VML	
11	TX2–	O, VML	
12	TX2+	O, VML	
DEVICE CONTROL PIN			
5	EN_RXD	I, LVCMOS	Sets device operation modes per Table 2. Internally pulled to VCC
14	RSVD	I, LVCMOS	RSVD, internally pulled to GND. Can be left as No-connect.
7, 24	NC	No-connect	Pads are not internally connected
EQ CONTROL PINS(1)			
3, 16	DE1, DE2	I, LVCMOS	Selects de-emphasis settings for CH 1 and CH 2 per Table 2. Internally tied to Vcc/2
2, 17	EQ1, EQ2	I, LVCMOS	Selects equalization settings for CH 1 and CH 2 per Table 2. Internally tied to Vcc/2
4, 15	OS1, OS2	I, LVCMOS	Selects output amplitude for CH 1 and CH 2 per Table 2. Internally tied to Vcc/2
POWER PINS			
1,13	VCC	Power	Positive supply should be 3.3V ± 10%
6, 10, 18, 21	GND	Power	Supply ground

(1) Internally biased to Vcc/2 with >200kΩ pull-up/pull-down. When pins are left as NC board leakage at this pin pad must be < 1 µA otherwise drive to Vcc/2 to assert mid-level state

Table 2. Signal Control Pin Setting

OUTPUT SWING AND EQ CONTROL (at 2.5 GHz)			
OSx(1)	**TRANSISTION BIT AMPLITUDE (TYP mVpp)**	**EQx(1)**	**EQUALIZATION (dB)**
NC (default)	1042	NC (default)	0
0	908	0	7
1	1127	1	15
OUTPUT DE CONTROL (at 2.5 GHz)			
DEx(1)	**OSx(1) = NC**	**OSx(1) = 0**	**OSx(1) = 1**
NC (default)	0 dB	0 dB	0 dB
0	–3.5 dB	–2.2 dB	–4.4 dB
1	–6.0 dB	–5.2 dB	–6.0 dB
CONTROL PINS SETTINGS			
EN_RXD	**DEVICE FUNCTION**		
1 (default)	Normal Operation		
0	Sleep Mode		

(1) Where x = Channel 1 or Channel 2

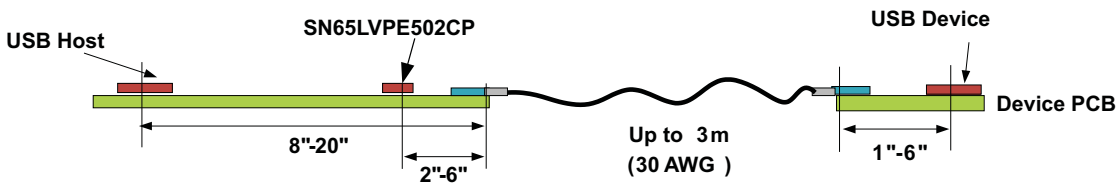

NOTE: For more detailed placement example of redriver see typical eye diagrams and jitter plots at end of data sheet.

Figure 9. Redriver Placement Example

DETAILED DESCRIPTION

Programmable EQ, De-Emphasis and Amplitude Swing

The SN65LVPE502CP is designed to minimize signal degradation effects such as crosstalk and inter-symbol interference (ISI) that limits the interconnect distance between two devices. The input stage of each channel offers selectable equalization settings that can be programmed to match loss in the channel. The differential outputs provide selectable de-emphasis to compensate for the anticipated distortion USB 3.0 signal will experience. Level of de-emphasis will depend on the length of interconnect and its characteristics. The SN65LVPE502CP provides a unique way to tailor output de-emphasis on a per channel basis with use of DE and OS pins. All Rx and Tx equalization settings supported by the device are programmed by six 3-state pins as shown in Table 2.

Low Power Modes

Device supports three low power modes as described below

1. Sleep Mode

   Initiated anytime EN_RXD undergoes a high to low transition and stays low or when device powers up with EN_RXD set low. In sleep mode both input and output terminations are held at HiZ and device ceases operation to conserve power. Sleep mode max power consumption is 1mW, entry time is 2µs, device exits sleep mode to Rx.Detect mode after EN_RXD is driven to Vcc, exit time is 100µs max.

2. RX Detect Mode--When no remote device is connected

   Anytime LVPE502CP detects a break in link (i.e. when upstream device is disconnected) or after power-up fails to find a remote device, LVPE502CP goes to Rx Detect mode and conserves power by shutting down majority of its internal circuitry. In this mode input termination for both channels are driven to Hi-Z. In Rx Detect mode device power is <10mW (TYP) or less than 5% of its normal operating power . This feature is very useful in saving system power in mobile applications like notebook PC where battery life is critical.

   Anytime an upstream device gets reconnected the redriver automatically senses the connection and goes to normal operating mode. This operation requires no setting to the device.

3. U2/U3 Mode

   With the help of internal timers the device tracks when link enters USB 3.0 low power modes U2 and U3; in these modes link is in electrical idle state. LVPE502CP will selectively turn-off internal circuitry to save on power. Typical power saving is about 75% lower than normal operating mode. The device will automatically revert to active mode when signal activity (LFPS) is detected.

Receiver Detection

At Power Up or Reset

After power-up or anytime EN_RXD is toggled, RX.Detect cycle is performed by first setting Rx termination for each channel to Hi-Z, device then starts sensing for receiver termination that may be attached at the other end of each TX.

If receiver is detected on both channel

- The TX and RX terminations are switched to Z_{DIFF_TX}, Z_{DIFF_RX} respectively.

If no receiver is detected on one or both channels

- The transmitter is pulled to Hi-Z
- The channel is put in low power mode
- Device attempts to detect Rx termination in 12 ms (TYP) interval until termination is found or device is put in sleep mode

During U2/U3 Link State

Rx detection is also performed periodically when link is in U2/U3 states. However in these states during Rx detection, input termination is not automatically disabled before performing Rx.Detect. If termination is found device goes back to its low power state if termination is not found then device disables its input termination and then jumps to power-up RX.Detect state.

Copyright © 2011–2012, Texas Instruments Incorporated

Electrical Idle Support

Electrical idle support is needed for low frequency periodic signaling (LFPS) used in USB 3.0 side band communication. A link is in an electrical idle state when the TX± voltage is held at a steady constant value like the common mode voltage. LVPE502CP detects an electrical idle state when RX± voltage at the device pin falls below VRX_LFPS_DIFFp-p min. After detection of an idle state in a given channel the device asserts electrical idle state in its corresponding TX. When RX± voltage exceeds VRX_LFPS_DIFFp-p max normal operation is restored and output start passing input signal. Electrical idle exit and entry time is speccified at < 6ns.

TYPICAL EYE DIAGRAM AND PERFORMANCE CURVES

Measurement equipment details:

- Generator (source) LeCroy PERT3,
- Signal: 5Gbps, 1000mVp-p, 3.5 dB De-Emphasis
- Tj and Dj measurements based on CP0 (USB 3 compliance pattern) which is D0.0 or logical idle with SKP sequences removed
- Rj measurements based on CP1 or D10.2 symbol containing alternating 0s and 1s at Nyquist frequency
- Oscilloscope (Sink) LeCroy 25GHz Real Time Oscilloscope
- LeCroy QualiPHY software used to measure jitter and collect compliance eye diagrams

Device Operating Conditions: VCC = 3.3 V, Temp = 25°C, EQx/DEx/OSx set to their default value when not mentioned

Copyright © 2011–2012, Texas Instruments Incorporated

PLOT #1 FIXED OUTPUT TRACE +3m USB 3 CABLE WITH VARIABLE INPUT TRACE

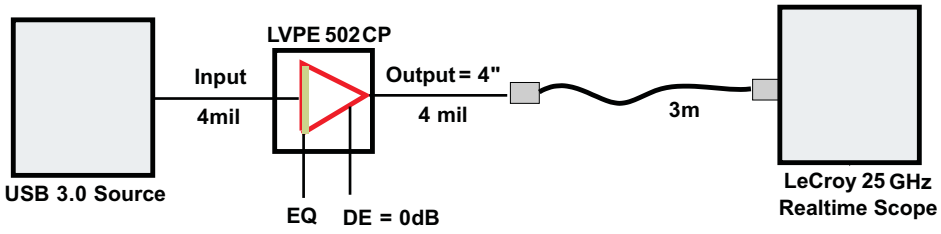

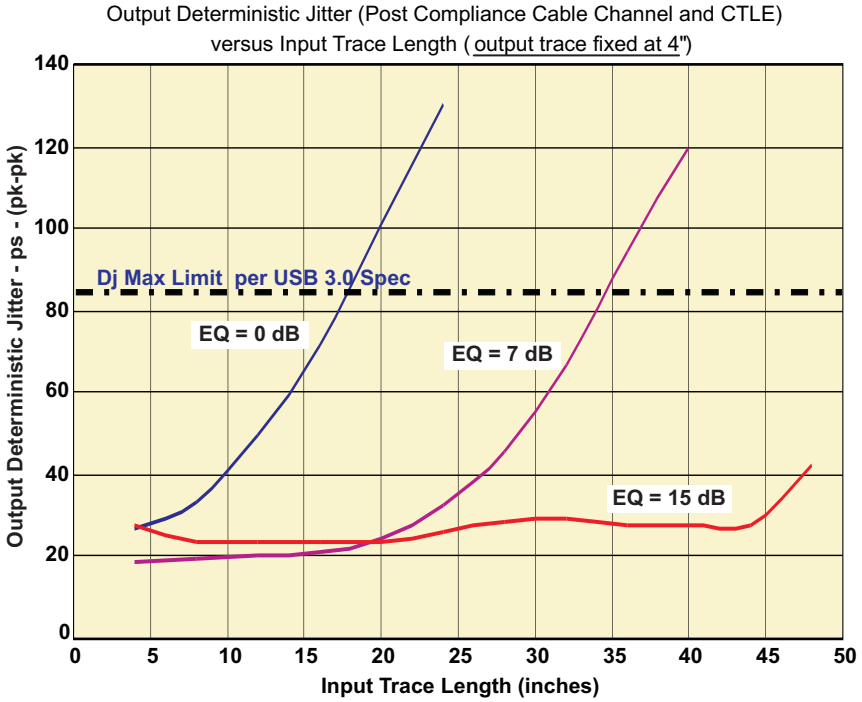

Copyright © 2011–2012, Texas Instruments Incorporated

PLOT #2 FIXED INPUT TRACE WITH VARIABLE OUTPUT TRACE and +3m USB 3.0 CABLE

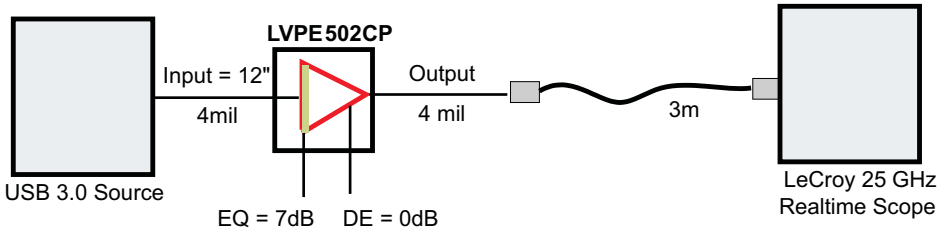

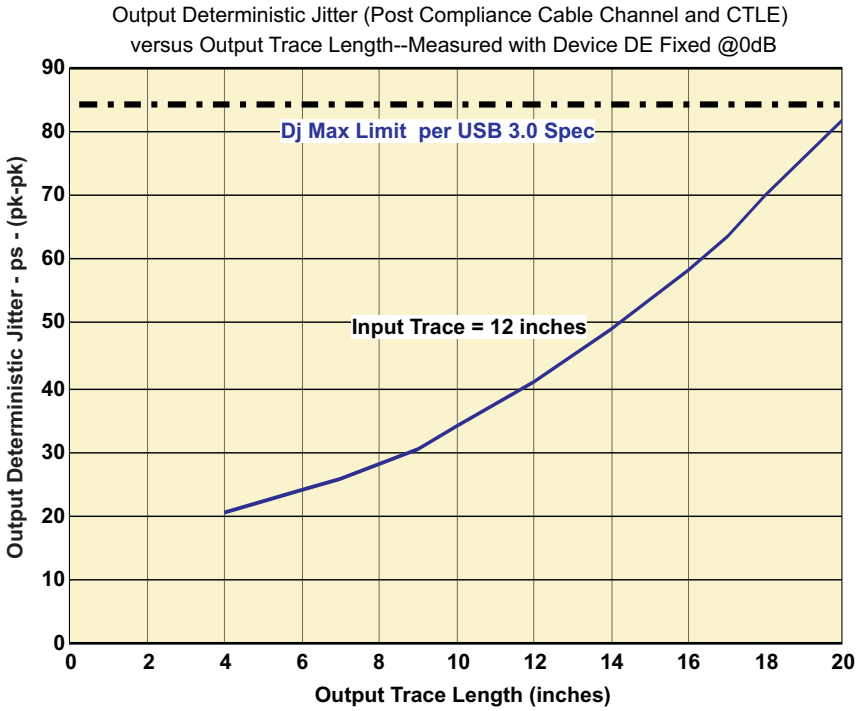

PLOT #3 FIXED INPUT TRACE WITH VARIABLE OUTPUT TRACE and (No Cable)

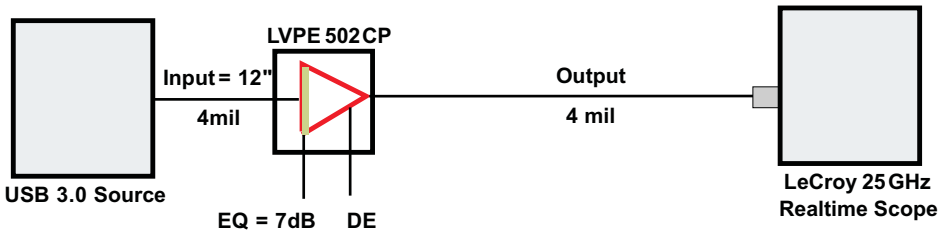

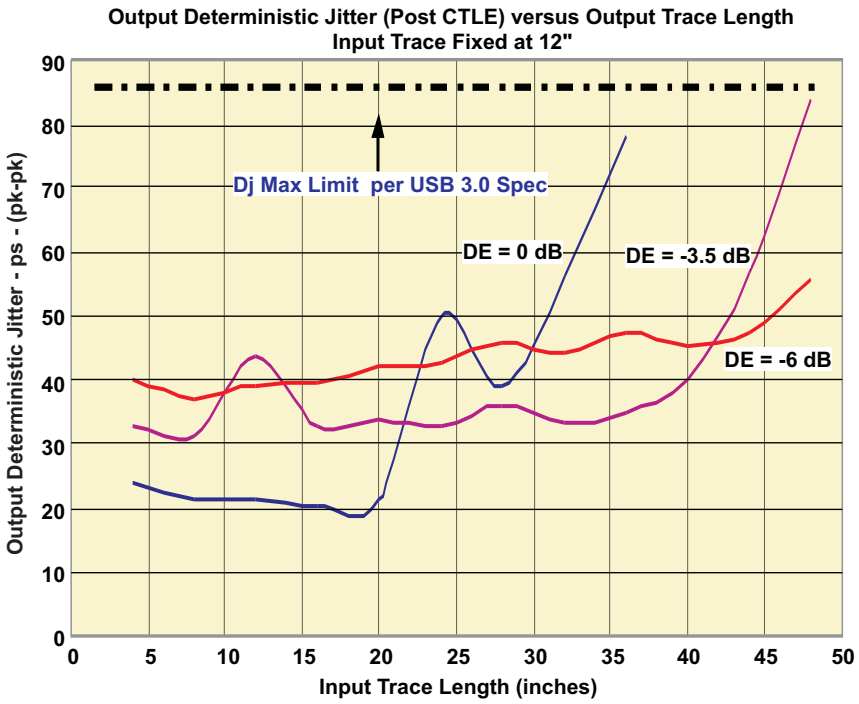

Copyright © 2011–2012, Texas Instruments Incorporated

USB 3.0 MASK EYE DIAGRAM TEST

CASE I FIXED OUTPUT AND VARIABLE INPUT TRACE

DE= 0dB, EQ = 0dB, Input = 4", Output = 4" + 3m Cable

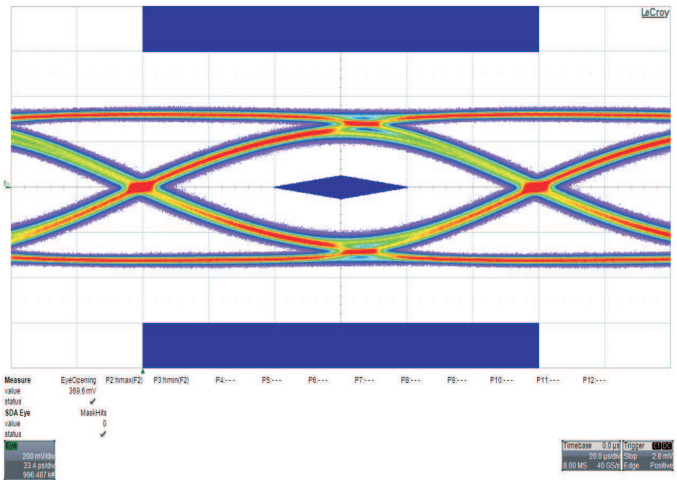

DE= 0dB, EQ = 0dB, Input = 8", Output = 4" + 3m Cable

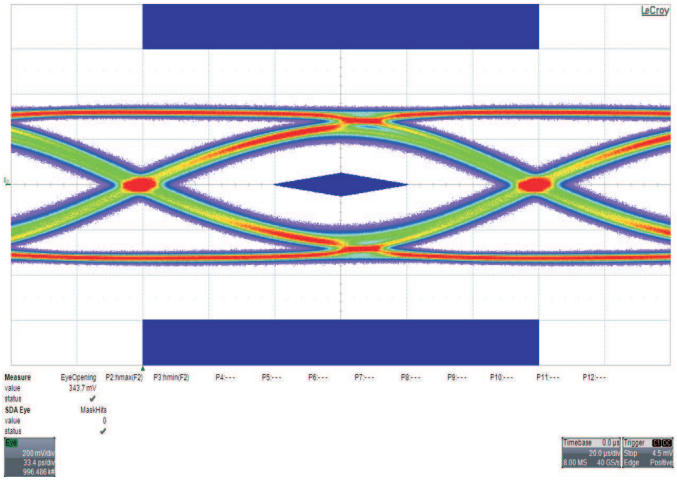

DE= 0dB, EQ = 0dB, Input = 12”, Output = 4” + 3m Cable

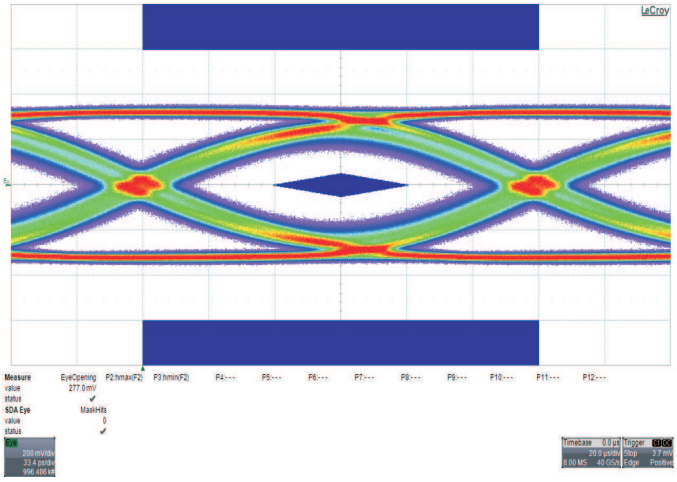

DE= 0dB, EQ = 0dB, Input = 16”, Output = 4” + 3m Cable

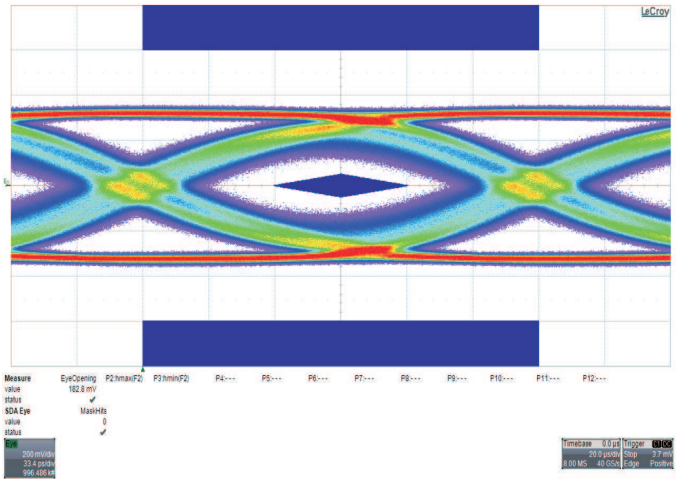

DE= 0dB, EQ = 0dB, Input = 20”, Output = 4” + 3m Cable

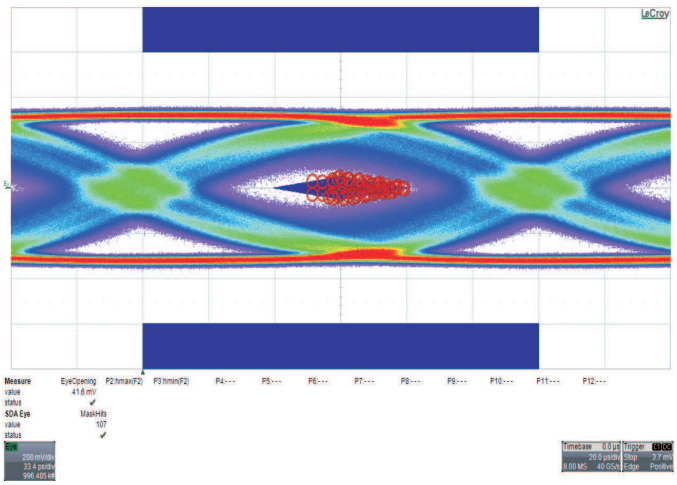

Copyright © 2011–2012, Texas Instruments Incorporated

DE= 0dB, EQ = 7dB, Input = 24”, Output = 4” + 3m Cable

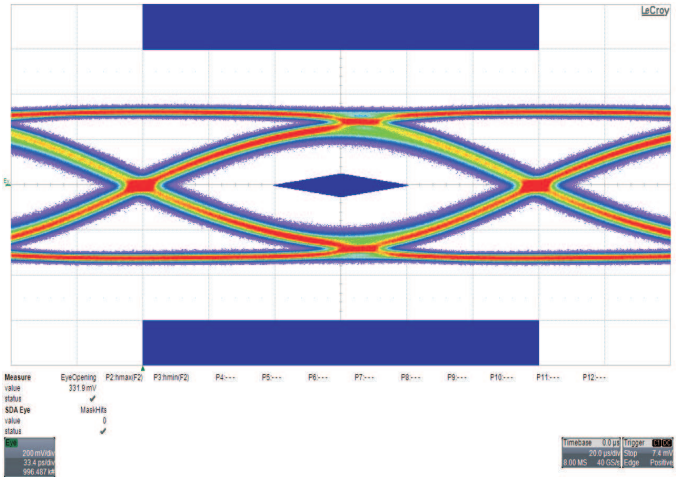

DE= 0dB, EQ = 7dB, Input = 32”, Output = 4” + 3m Cable

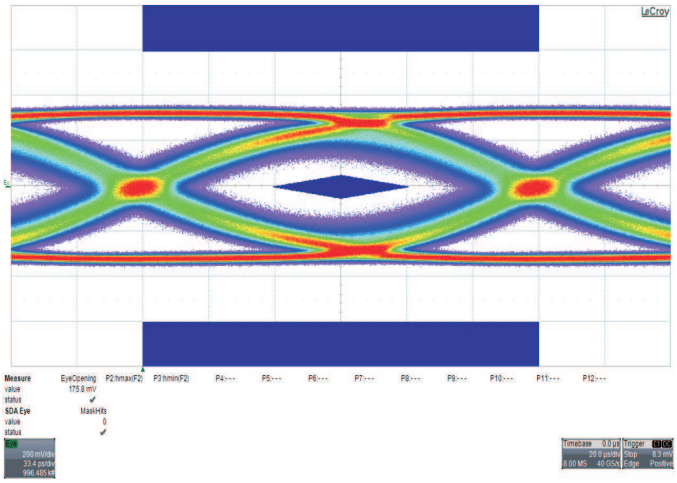

DE= 0dB, EQ = 7dB, Input = 36”, Output = 4” + 3m Cable

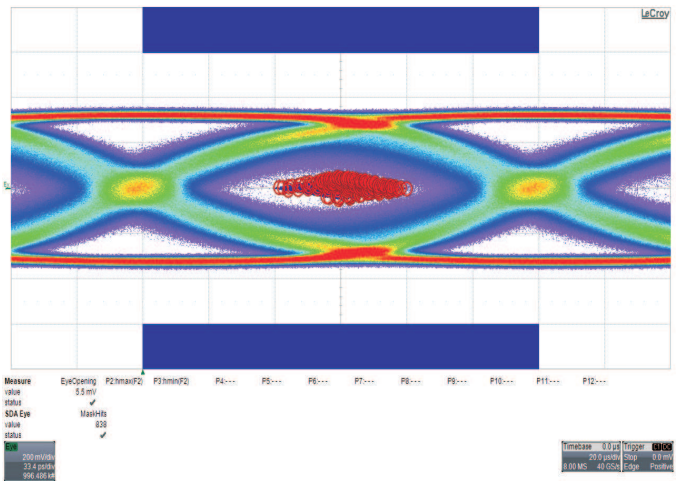

Copyright © 2011–2012, Texas Instruments Incorporated

DE= 0dB, EQ = 15dB, Input = 36”, Output = 4” + 3m Cable

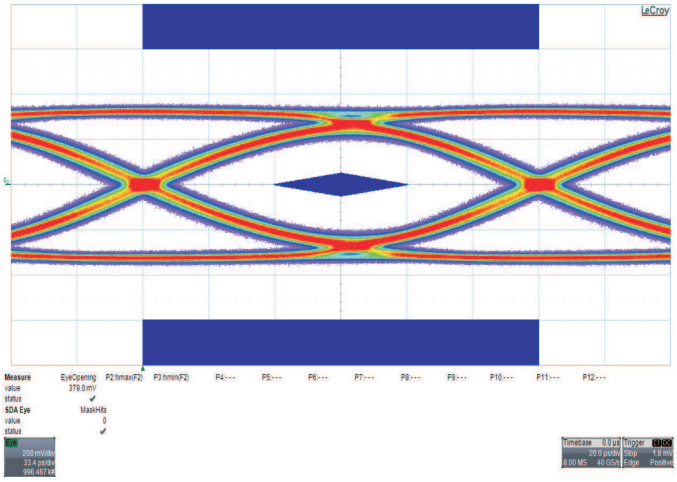

DE= 0dB, EQ = 15dB, Input = 48”, Output = 4” + 3m Cable

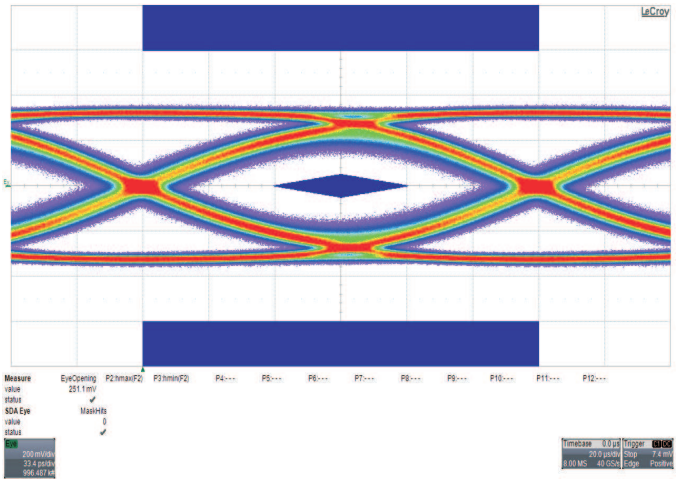

CASE II FIXED INPUT AND VARIABLE OUTPUT TRACE+ 3m CABLE

DE= 0dB, EQ = 7dB, Input = 12”, Output = 4” + 3m Cable

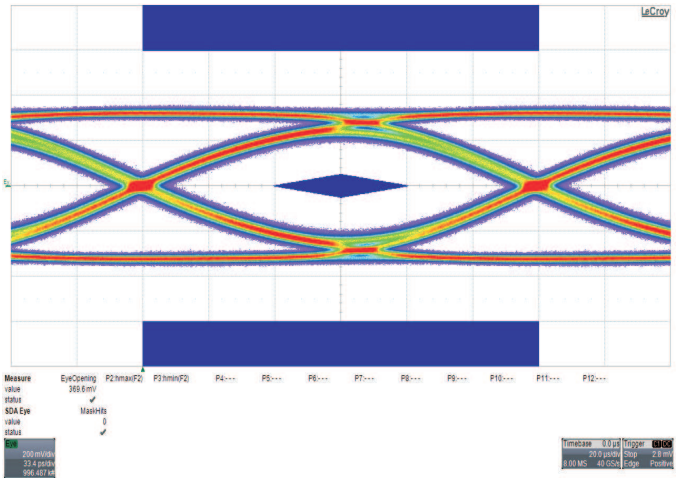

Copyright © 2011–2012, Texas Instruments Incorporated

DE= 0dB, EQ = 7dB, Input = 12”, Output = 8” + 3m Cable

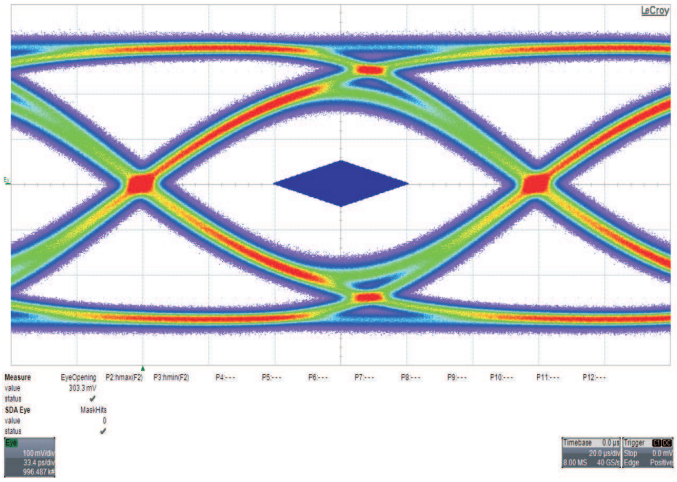

DE= 0dB, EQ = 7dB, Input = 12”, Output = 12” + 3m Cable

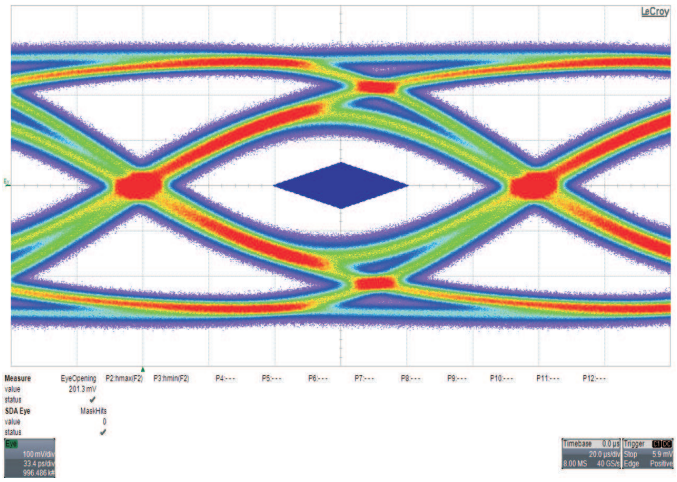

DE= 0dB, EQ = 7dB, Input = 12”, Output = 16” + 3m Cable

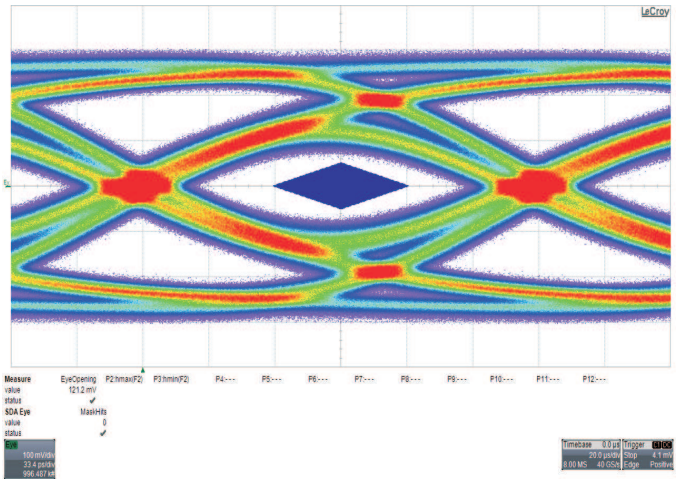

Copyright © 2011–2012, Texas Instruments Incorporated

DE= 0dB, EQ = 7dB, Input = 12" , Output = 20" + 3m Cable

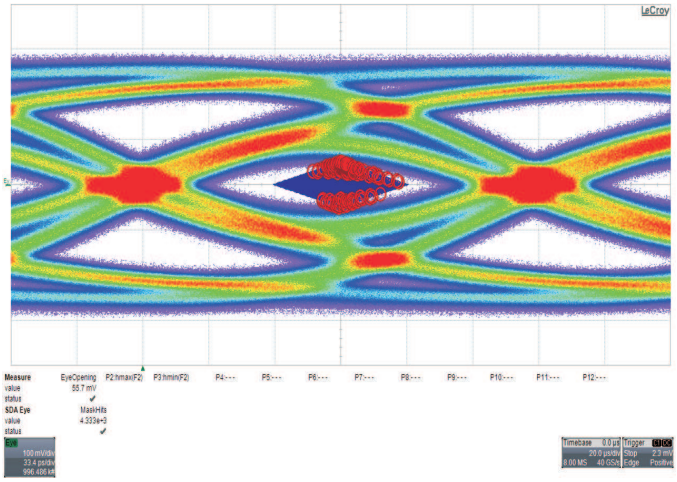

CASE III FIXED INPUT AND VARIABLE OUTPUT TRACE (No Cable)

DE= 0dB, EQ = 7dB, Input = 12" , Output = 8"

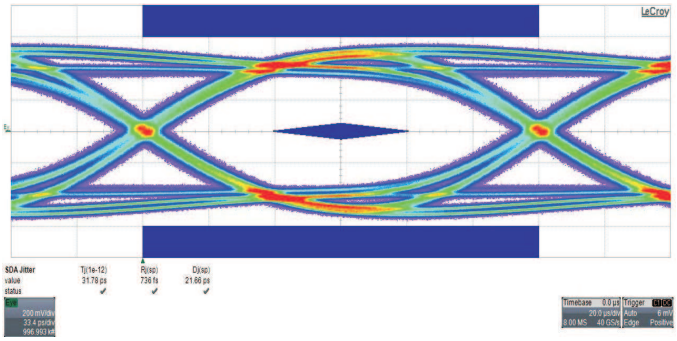

DE= 0dB, EQ = 7dB, Input = 12" , Output = 32"

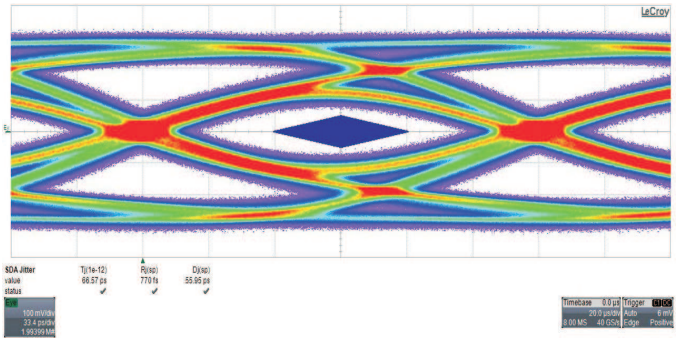

Copyright © 2011–2012, Texas Instruments Incorporated

DE= 0dB, EQ = 7dB, Input = 12”, Output = 36”

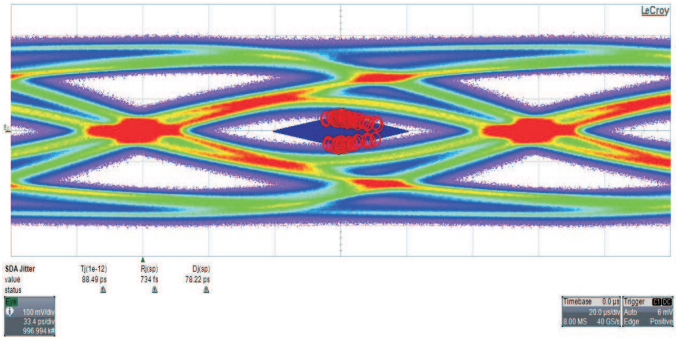

DE= -3.5dB, EQ = 7dB, Input = 12”, Output = 36”

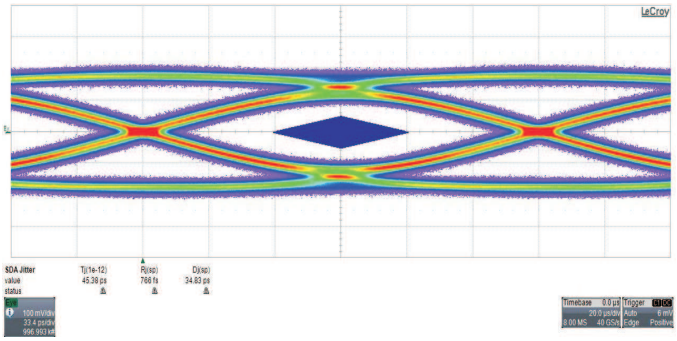

DE= -6.0dB, EQ = 7dB, Input = 12”, Output = 40”

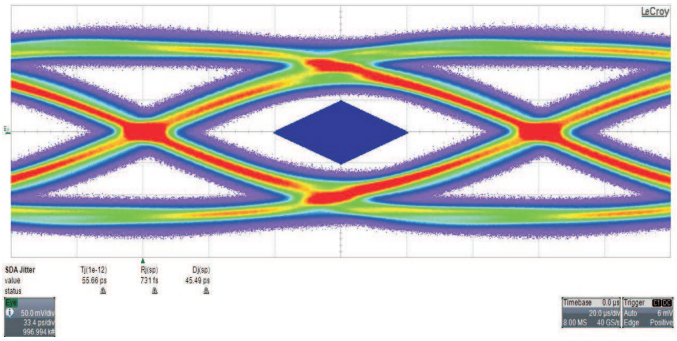

DE= -6.0dB, EQ = 7dB, Input = 12”, Output = 44”

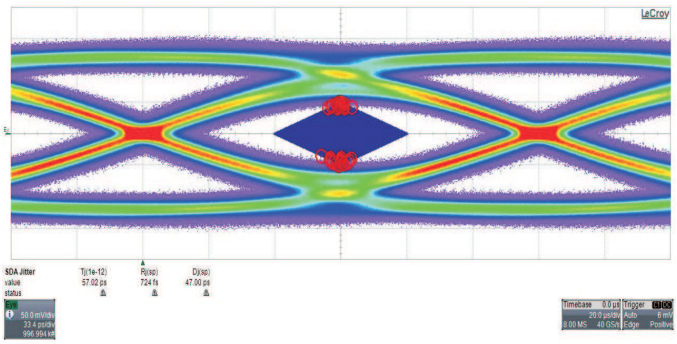

Copyright © 2011–2012, Texas Instruments Incorporated

REVISION HISTORY

Changes from Original (March 2011) to Revision A **Page**

- Changed the Block Diagram label From: CM/EN_RXD To: EN_RXD 2
- Changed From: CM To: RSVD in the THERMAL CHARACTERISTICS table Test Conditions 3
- Changed From: CM To: RSVD in the RECOMMENDED OPERATING CONDITIONS table Test Conditions 4
- Changed pin name From: CM To: RSVD in the Flow-Through Pin-Out illustration 8
- Changed pin name and description From: CM To: RSVD in the Pin Functions table 9
- Deleted CM and Device Functions columns from the Control Pins Settings of Table 2 9
- Deleted the USB Compliance Mode section 11

Changes from Revision A (September 2011) to Revision B **Page**

- Changed the I/O type for the TX pins (11, 12, 22, 23) From: O, CML To: O, VML 9
- Changed the pin Description for the TX pins (11, 12, 22, 23) From: Non-inverting and inverting CML differential output for CH 1 and CH 2 To: Non-inverting and inverting VML differential output for CH 1 and CH 2 9

Copyright © 2011–2012, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
SN65LVPE502CPRGER	NRND	Production	VQFN (RGE) | 24	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	0 to 85	502CP
SN65LVPE502CPRGER.B	NRND	Production	VQFN (RGE) | 24	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	0 to 85	502CP
SN65LVPE502CPRGET	NRND	Production	VQFN (RGE) | 24	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	0 to 85	502CP
SN65LVPE502CPRGET.B	NRND	Production	VQFN (RGE) | 24	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	0 to 85	502CP

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

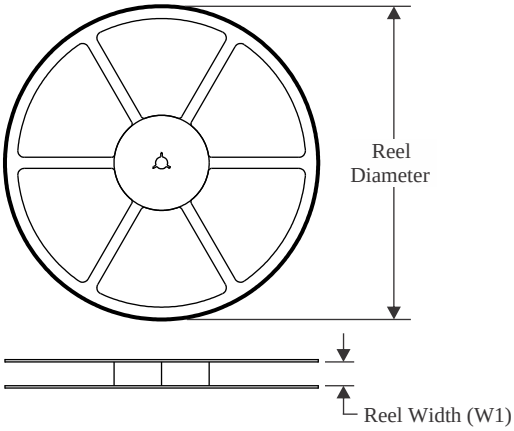

TAPE DIMENSIONS

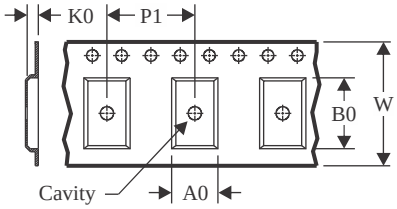

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

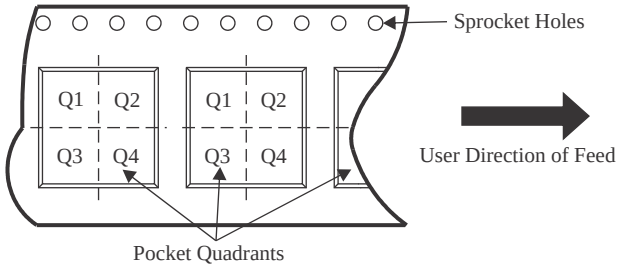

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN65LVPE502CPRGER	VQFN	RGE	24	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2
SN65LVPE502CPRGET	VQFN	RGE	24	250	180.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2

TAPE AND REEL BOX DIMENSIONS

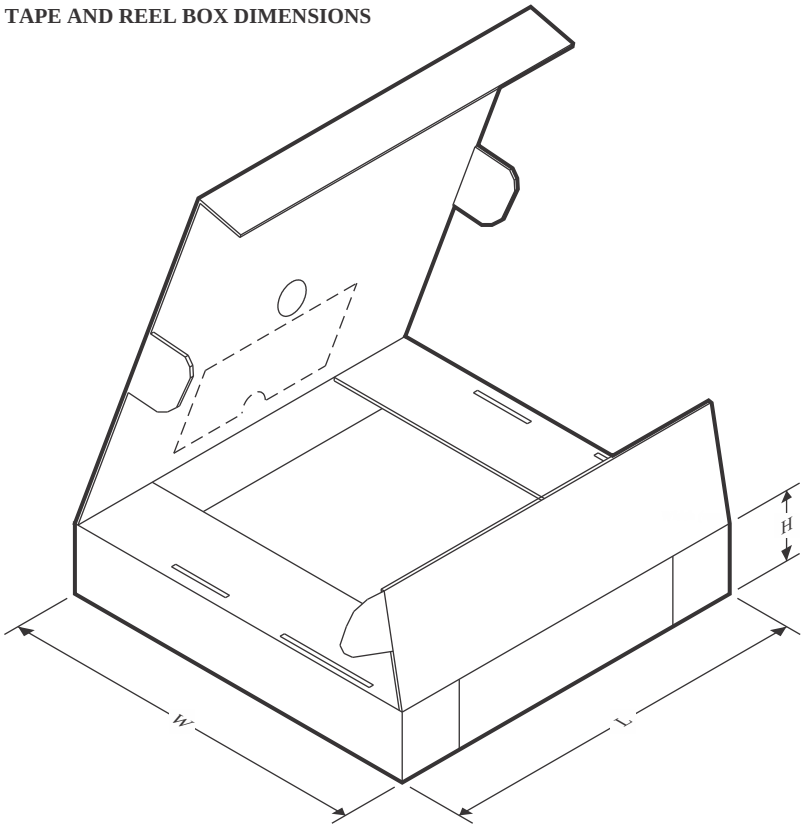

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN65LVPE502CPRGER	VQFN	RGE	24	3000	356.0	356.0	35.0
SN65LVPE502CPRGET	VQFN	RGE	24	250	213.0	191.0	35.0

RGE 24

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

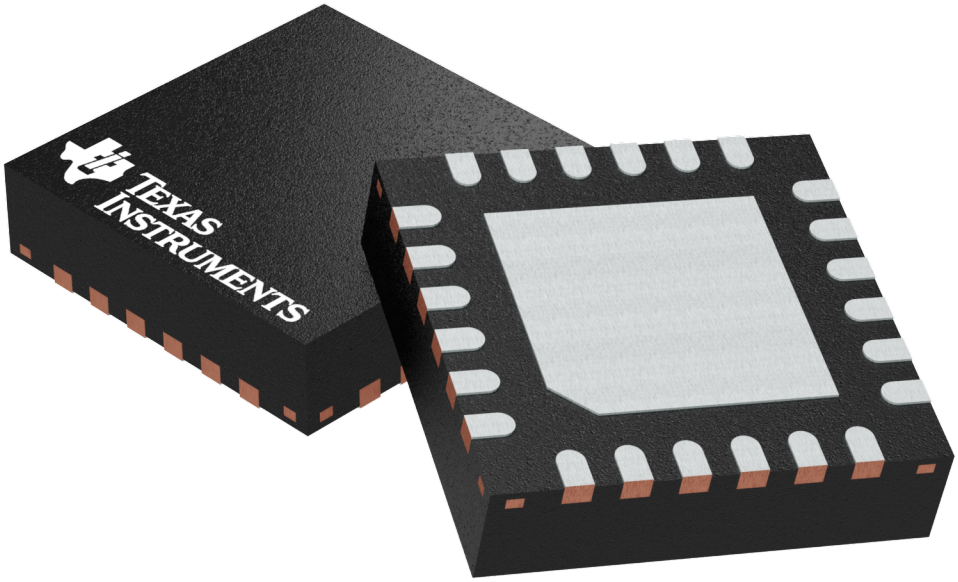

Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

PACKAGE OUTLINE

RGE0024C

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK- NO LEAD

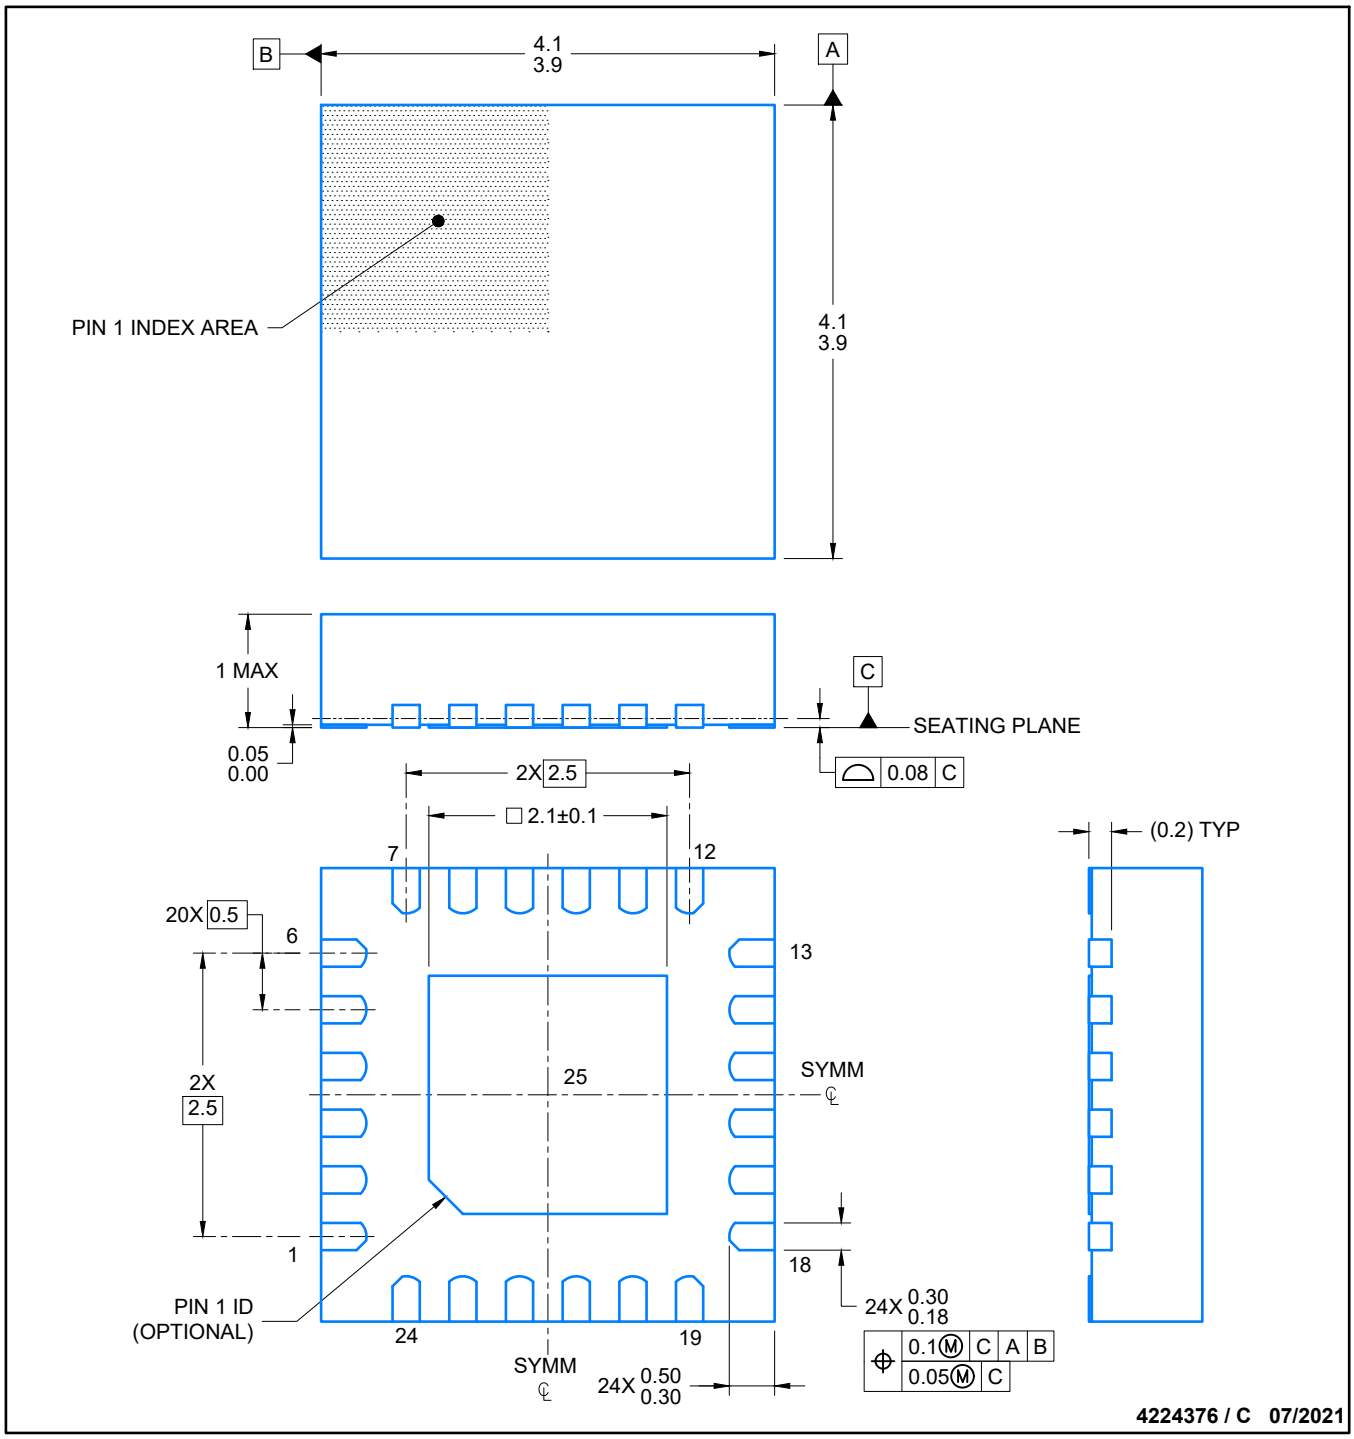

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

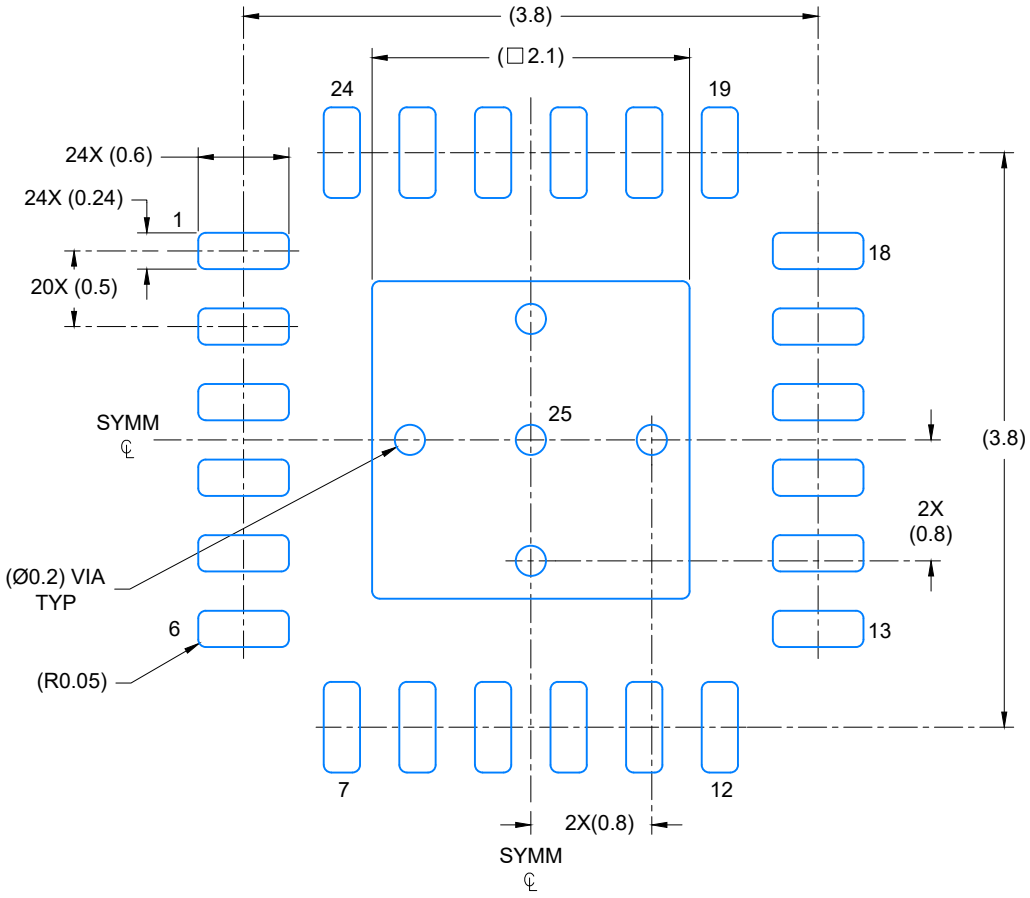

LAND PATTERN EXAMPLE

SCALE: 20X

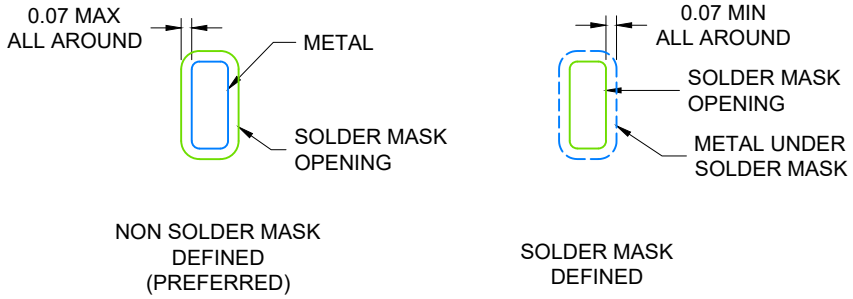

SOLDER MASK DETAILS

4224376 / C 06/2021

NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

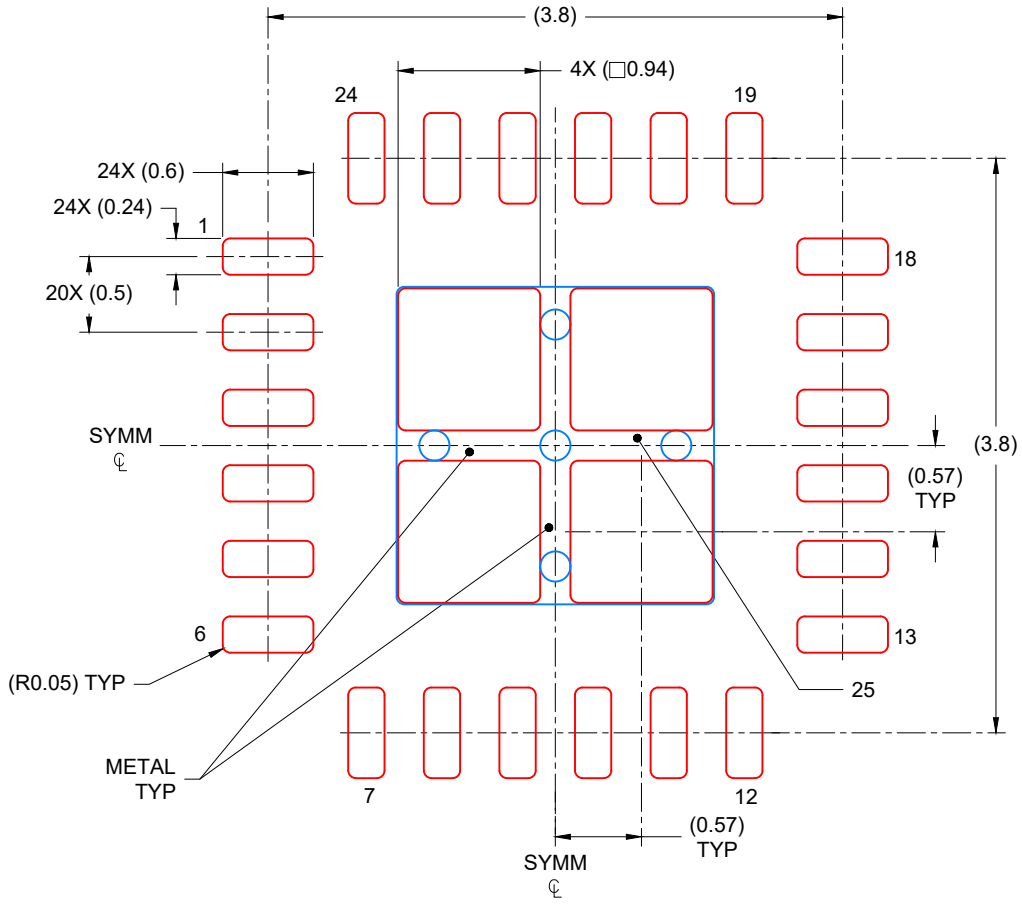

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD
80% PRINTED COVERAGE BY AREA
SCALE: 20X

4224376 / C 06/2021

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations..

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated