ADVANCED POWER TECHNOLOGY®

600V
APT65GP60L2DQ2
APT65GP60L2DQ2G*

***G Denotes RoHS Compliant, Pb Free Terminal Finish.**

POWER MOS 7® IGBT



The POWER MOS 7® IGBT is a new generation of high voltage power IGBTs. Using Punch Through Technology this IGBT is ideal for many high frequency, high voltage switching applications and has been optimized for high frequency switchmode power supplies.

- **Low Conduction Loss**
- **Low Gate Charge**
- **Ultrafast Tail Current shutoff**
- **100 kHz operation @ 400V, 54A**
- **50 kHz operation @ 400V, 76A**
- **SSOA Rated**



MAXIMUM RATINGS

All Ratings: T_C = 25°C unless otherwise specified.

Symbol	Parameter	APT65GP60L2DQ2	UNIT
V_{CES}	Collector-Emitter Voltage	600	Volts
V_{GE}	Gate-Emitter Voltage	±30	
I_{C1}	Continuous Collector Current ⑦ @ T_C = 25°C	198	Amps
I_{C2}	Continuous Collector Current @ T_C = 110°C	96	
I_{CM}	Pulsed Collector Current ① @ T_C = 150°C	250	
SSOA	Switching Safe Operating Area @ T_J = 150°C	250A @ 600V	
P_D	Total Power Dissipation	833	Watts
T_J,T_{STG}	Operating and Storage Junction Temperature Range	-55 to 150	°C
T_L	Max. Lead Temp. for Soldering: 0.063" from Case for 10 Sec.	300	

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	Units
$V_{(BR)CES}$	Collector-Emitter Breakdown Voltage (V_{GE} = 0V, I_C = 1000μA)	600			Volts
$V_{GE(TH)}$	Gate Threshold Voltage (V_{CE} = V_{GE}, I_C = 2.5mA, T_j = 25°C)	3	4.5	6	
$V_{CE(ON)}$	Collector-Emitter On Voltage (V_{GE} = 15V, I_C = 65A, T_j = 25°C)		2.2	2.7	
	Collector-Emitter On Voltage (V_{GE} = 15V, I_C = 65A, T_j = 125°C)		2.1		
I_{CES}	Collector Cut-off Current (V_{CE} = 600V, V_{GE} = 0V, T_j = 25°C) ②			1250	μA
	Collector Cut-off Current (V_{CE} = 600V, V_{GE} = 0V, T_j = 125°C) ②			5500	
I_{GES}	Gate-Emitter Leakage Current (V_{GE} = ±20V)			±100	nA

CAUTION: These Devices are Sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

APT Website - http://www.advancedpower.com

050-7454 Rev A 6-2005

DYNAMIC CHARACTERISTICS

Symbol	Characteristic	Test Conditions	MIN	TYP	MAX	UNIT
C_{ies}	Input Capacitance	**Capacitance** V_{GE} = 0V, V_{CE} = 25V f = 1 MHz		7400		pF
C_{oes}	Output Capacitance			580		
C_{res}	Reverse Transfer Capacitance			35		
V_{GEP}	Gate-to-Emitter Plateau Voltage	Gate Charge V_{GE} = 15V V_{CE} = 300V I_C = 65A		7.5		V
Q_g	Total Gate Charge ③			210		nC
Q_{ge}	Gate-Emitter Charge			50		
Q_{gc}	Gate-Collector ("Miller") Charge			65		
SSOA	Switching Safe Operating Area	T_J = 150°C, R_G = 5Ω, V_{GE} = 15V, L = 100μH, V_{CE} = 600V	250			A
$t_{d(on)}$	Turn-on Delay Time	**Inductive Switching (25°C)** V_{CC} = 400V V_{GE} = 15V I_C = 65A R_G = 5Ω T_J = +25°C		30		ns
t_r	Current Rise Time			55		
$t_{d(off)}$	Turn-off Delay Time			90		
t_f	Current Fall Time			65		
E_{on1}	Turn-on Switching Energy ④			605		μJ
E_{on2}	Turn-on Switching Energy (Diode) ⑤			1410		
E_{off}	Turn-off Switching Energy ⑥			895		
$t_{d(on)}$	Turn-on Delay Time	**Inductive Switching (125°C)** V_{CC} = 400V V_{GE} = 15V I_C = 65A R_G = 5Ω T_J = +125°C		30		ns
t_r	Current Rise Time			55		
$t_{d(off)}$	Turn-off Delay Time			130		
t_f	Current Fall Time			90		
E_{on1}	Turn-on Switching Energy ④			605		μJ
E_{on2}	Turn-on Switching Energy (Diode) ⑤			1925		
E_{off}	Turn-off Switching Energy ⑥			1470		

THERMAL AND MECHANICAL CHARACTERISTICS

Symbol	Characteristic	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction to Case **(IGBT)**			.15	°C/W
$R_{\theta JC}$	Junction to Case **(DIODE)**			.67	
W_T	Package Weight		5.9		gm

① Repetitive Rating: Pulse width limited by maximum junction temperature.

② For Combi devices, I_{ces} includes both IGBT and FRED leakages

③ See MIL-STD-750 Method 3471.

④ E_{on1} is the clam ped inductive turn-on-energy of the IGBT only, without the effect of a commutating diode reverse recovery current adding to the IGBT turn-on loss. (See Figure 24.)

⑤ E_{on2} is the clamped inductive turn-on energy that includes a commutating diode reverse recovery current in the IGBT turn-on switching loss. (See Figures 21, 22.)

⑥ E_{off} is the clamped inductive turn-off energy measured in accordance with JEDEC standard JESD24-1. (See Figures 21, 23.)

⑦ Continuous current limited by package lead temperature.

APT Reserves the right to change, without notice, the specifications and information contained herein.

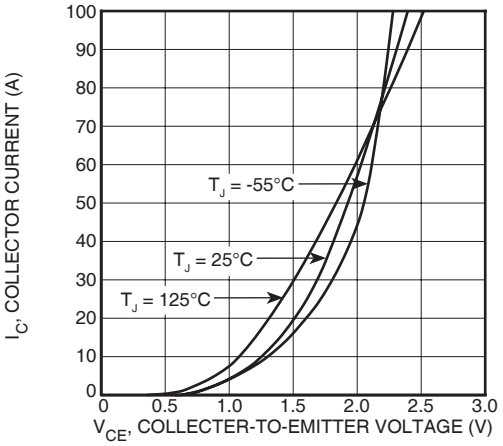

FIGURE 1, Output Characteristics(T_J = 25°C)

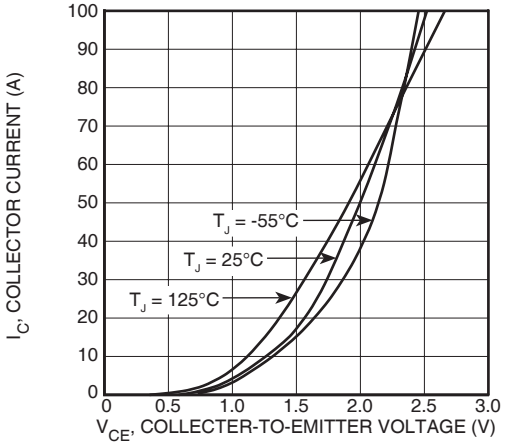

FIGURE 2, Output Characteristics (T_J = 125°C)

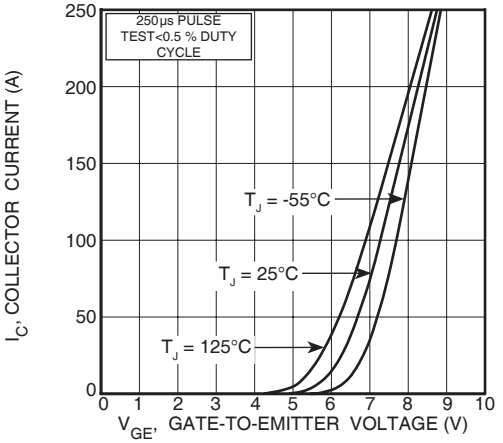

FIGURE 3, Transfer Characteristics

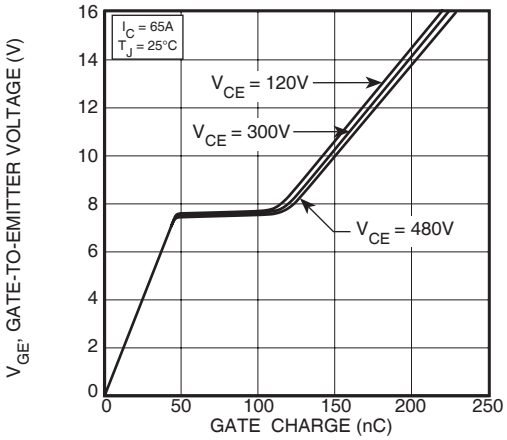

FIGURE 4, Gate Charge

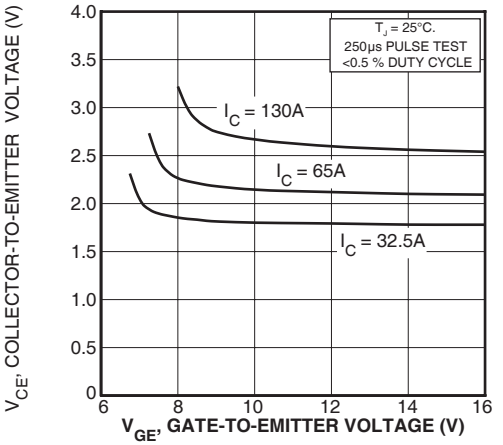

FIGURE 5, On State Voltage vs Gate-to- Emitter Voltage

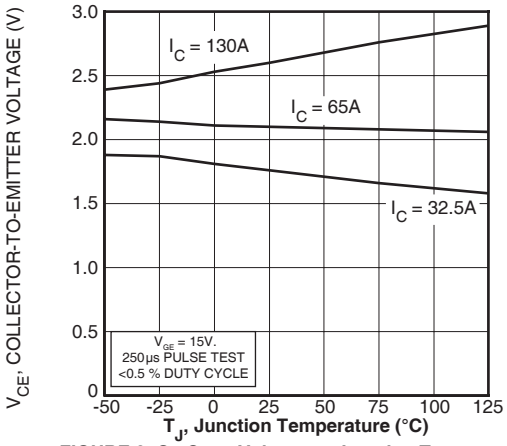

FIGURE 6, On State Voltage vs Junction Temperature

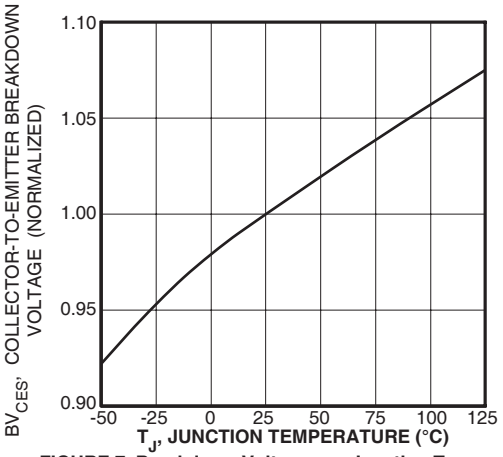

FIGURE 7, Breakdown Voltage vs. Junction Temperature

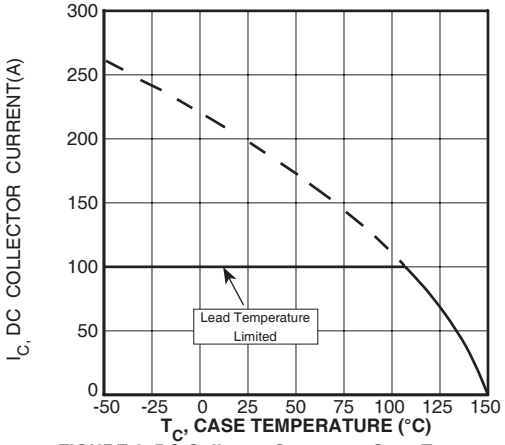

FIGURE 8, DC Collector Current vs Case Temperature

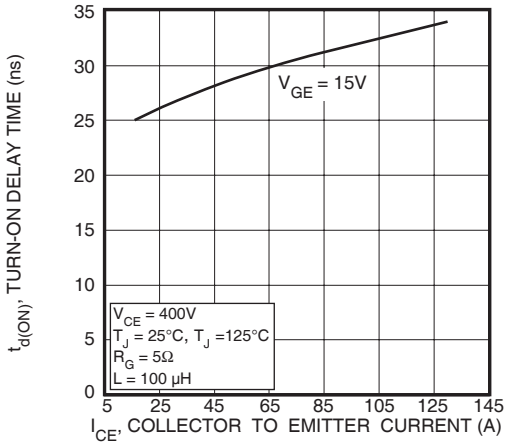

FIGURE 9, Turn-On Delay Time vs Collector Current

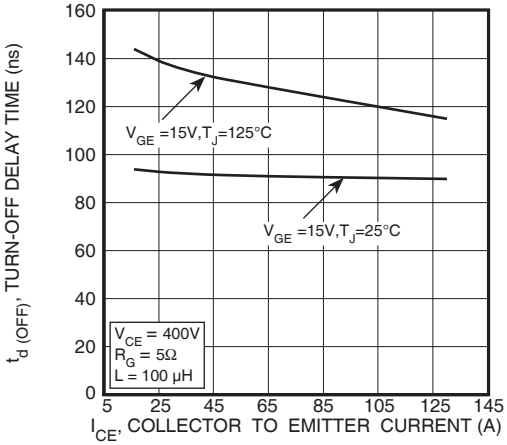

FIGURE 10, Turn-Off Delay Time vs Collector Current

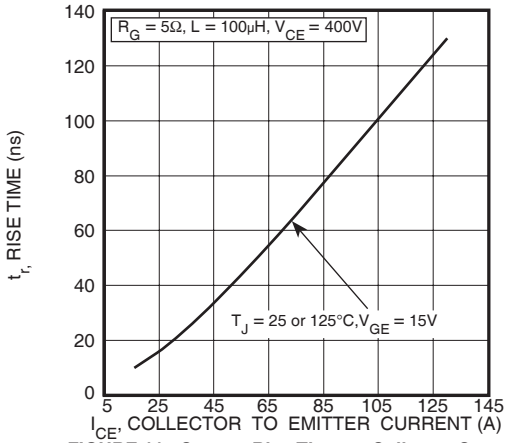

FIGURE 11, Current Rise Time vs Collector Current

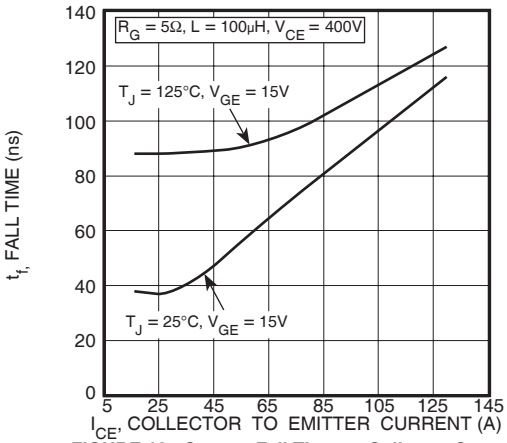

FIGURE 12, Current Fall Time vs Collector Current

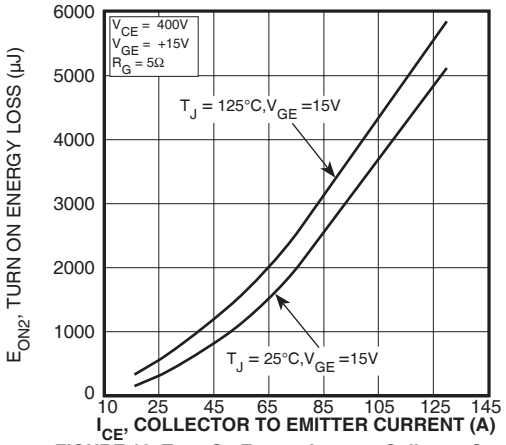

FIGURE 13, Turn-On Energy Loss vs Collector Current

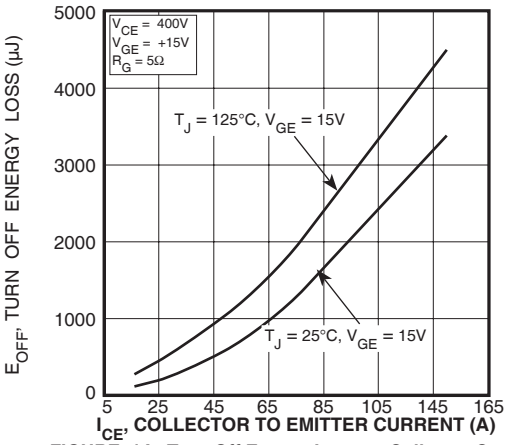

FIGURE 14, Turn Off Energy Loss vs Collector Current

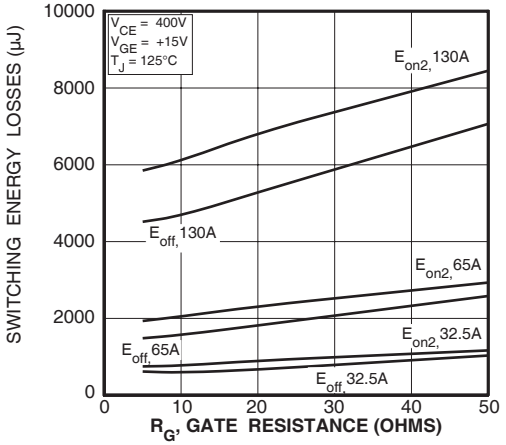

FIGURE 15, Switching Energy Losses vs. Gate Resistance

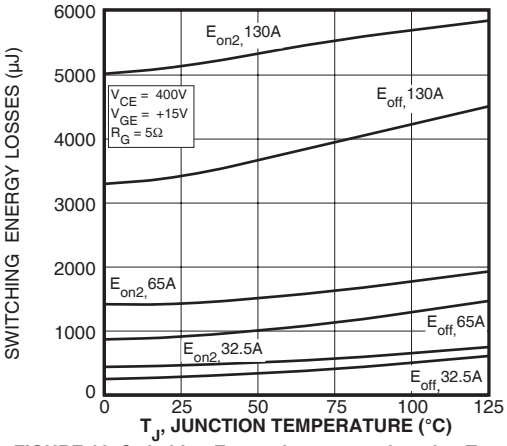

FIGURE 16, Switching Energy Losses vs Junction Temperature

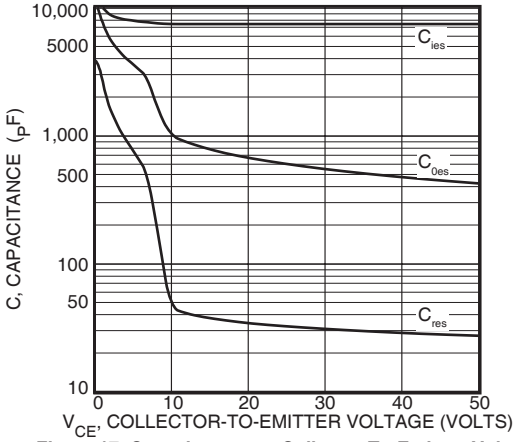

Figure 17, Capacitance vs Collector-To-Emitter Voltage

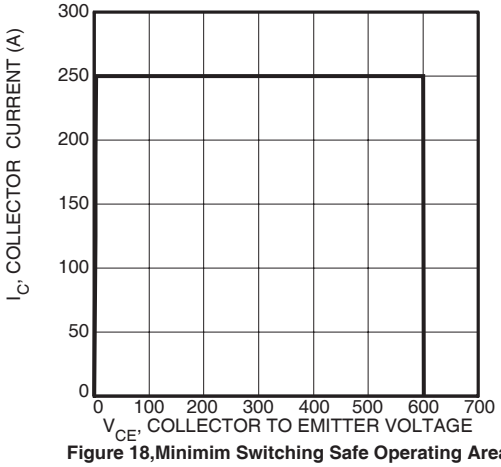

Figure 18,Minimim Switching Safe Operating Area

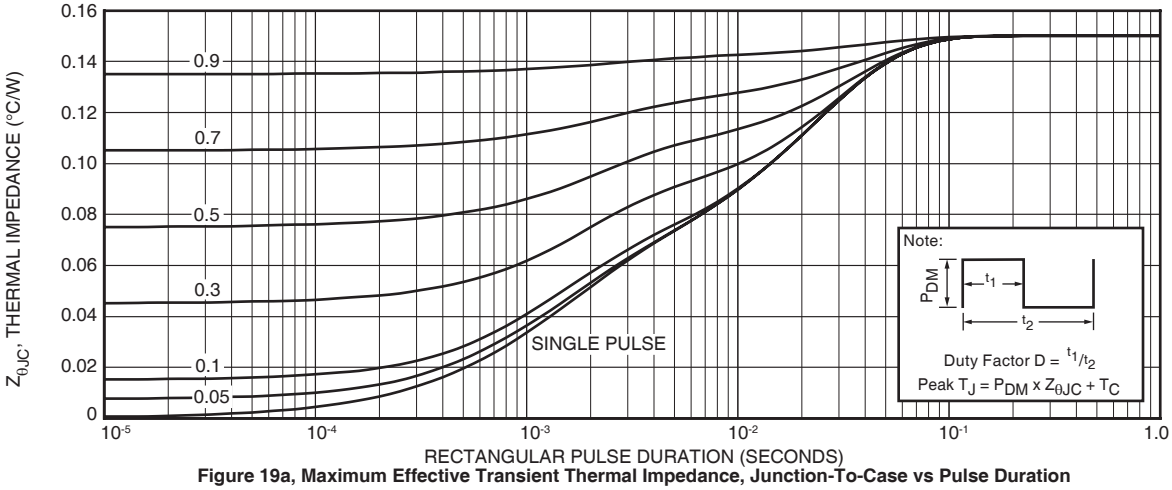

Figure 19a, Maximum Effective Transient Thermal Impedance, Junction-To-Case vs Pulse Duration

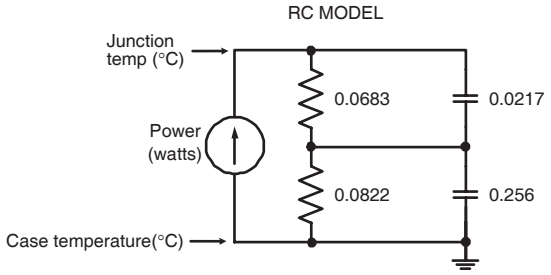

FIGURE 19b, TRANSIENT THERMAL IMPEDANCE MODEL

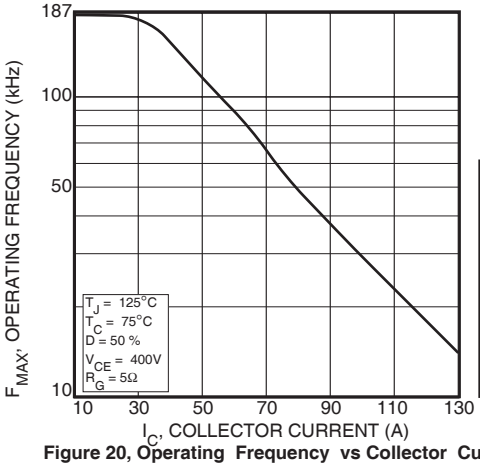

$$F_{max} = \min(f_{max}, f_{max2})$$

$$f_{max1} = \frac{0.05}{t_{d(on)} + t_r + t_{d(off)} + t_f}$$

$$f_{max2} = \frac{P_{diss} - P_{cond}}{E_{on2} + E_{off}}$$

$$P_{diss} = \frac{T_J - T_C}{R_{\theta JC}}$$

Figure 20, Operating Frequency vs Collector Current

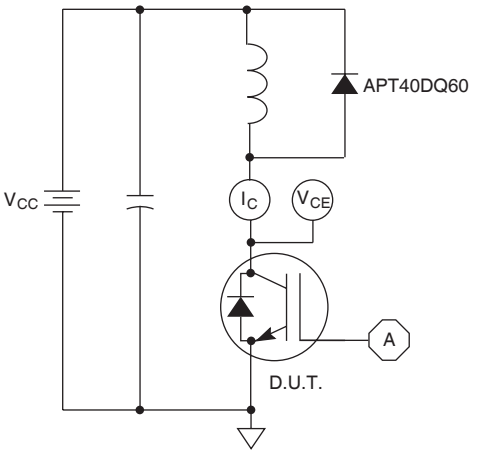

Figure 21, Inductive Switching Test Circuit

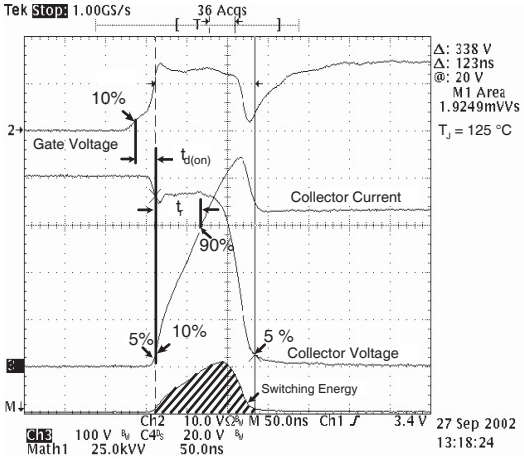

Figure 22, Turn-on Switching Waveforms and Definitions

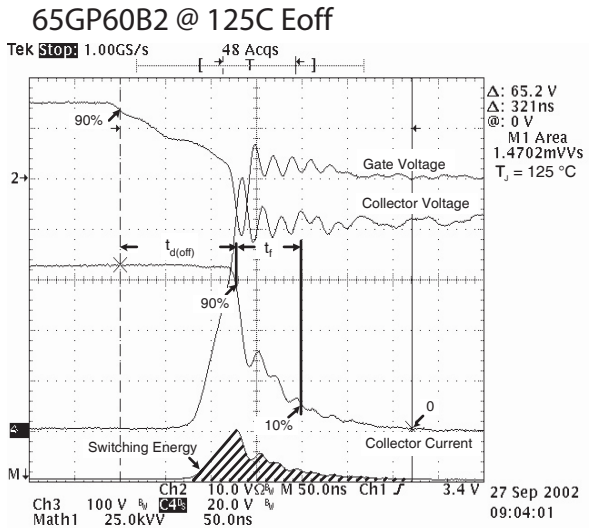

Figure 23, Turn-off Switching Waveforms and Definitions

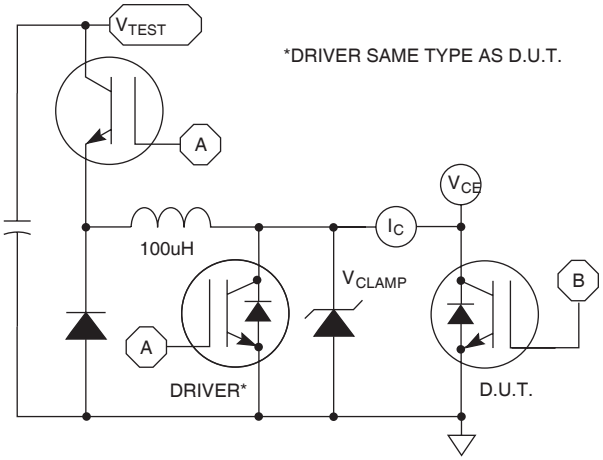

Figure 24, E_{ON1} Test Circuit

ULTRAFAST SOFT RECOVERY ANTI-PARALLEL DIODE

MAXIMUM RATINGS

All Ratings: T_C = 25°C unless otherwise specified.

Symbol	Characteristic / Test Conditions	APT65GP60L2DQ2			UNIT
$I_F(AV)$	Maximum Average Forward Current (T_C = 111°C, Duty Cycle = 0.5)		40		Amps
$I_F(RMS)$	RMS Forward Current (Square wave, 50% duty)		63		
I_{FSM}	Non-Repetitive Forward Surge Current (T_J = 45°C, 8.3ms)		320		

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions		MIN	TYP	MAX	UNIT
V_F	Forward Voltage	I_F = 65A		2.3		Volts
		I_F = 130A		2.9		
		I_F = 65A, T_J = 125°C		1.4		

DYNAMIC CHARACTERISTICS

Symbol	Characteristic	Test Conditions	MIN	TYP	MAX	UNIT
t_{rr}	Reverse Recovery Time	I_F = 1A, di_F/dt = -100A/µs, V_R = 30V, T_J = 25°C	-	22		ns
t_{rr}	Reverse Recovery Time	I_F = 40A, di_F/dt = -200A/µs, V_R = 400V, T_C = 25°C	-	25		ns
Q_{rr}	Reverse Recovery Charge		-	35		nC
I_{RRM}	Maximum Reverse Recovery Current		-	3	-	Amps
t_{rr}	Reverse Recovery Time	I_F = 40A, di_F/dt = -200A/µs, V_R = 400V, T_C = 125°C	-	160		ns
Q_{rr}	Reverse Recovery Charge		-	480		nC
I_{RRM}	Maximum Reverse Recovery Current		-	6	-	Amps
t_{rr}	Reverse Recovery Time	I_F = 40A, di_F/dt = -1000A/µs, V_R = 400V, T_C = 125°C	-	85		ns
Q_{rr}	Reverse Recovery Charge		-	920		nC
I_{RRM}	Maximum Reverse Recovery Current		-	20		Amps

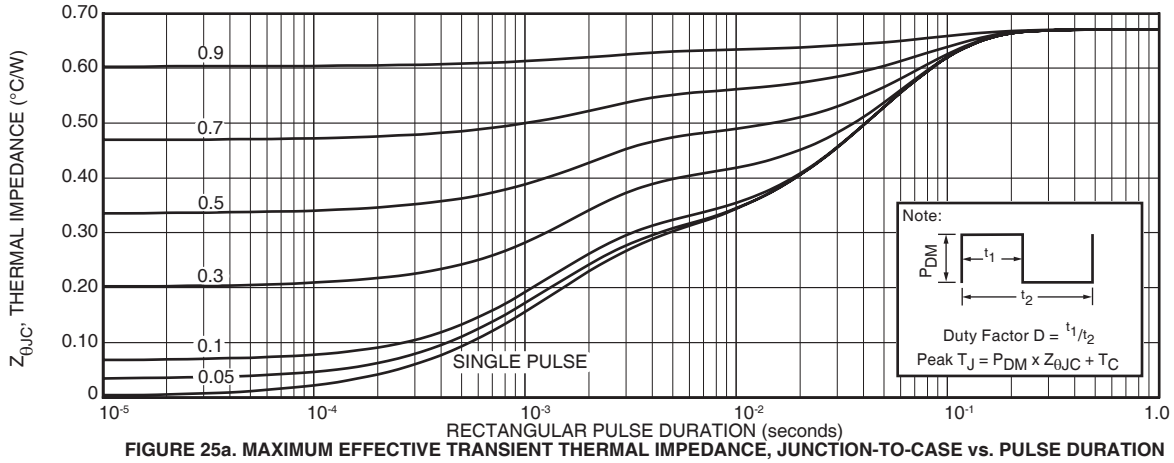

FIGURE 25a. MAXIMUM EFFECTIVE TRANSIENT THERMAL IMPEDANCE, JUNCTION-TO-CASE vs. PULSE DURATION

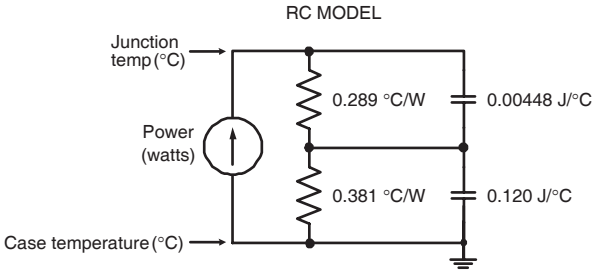

FIGURE 25b, TRANSIENT THERMAL IMPEDANCE MODEL

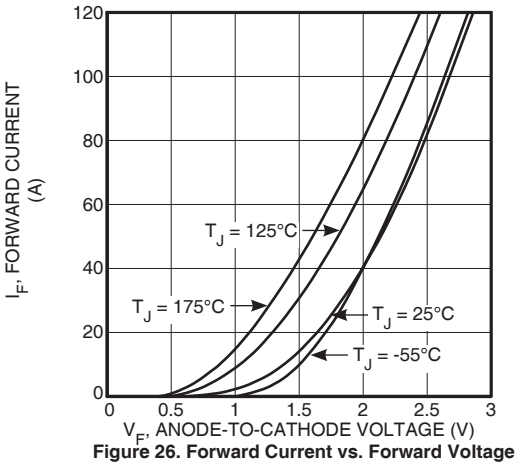

Figure 26. Forward Current vs. Forward Voltage

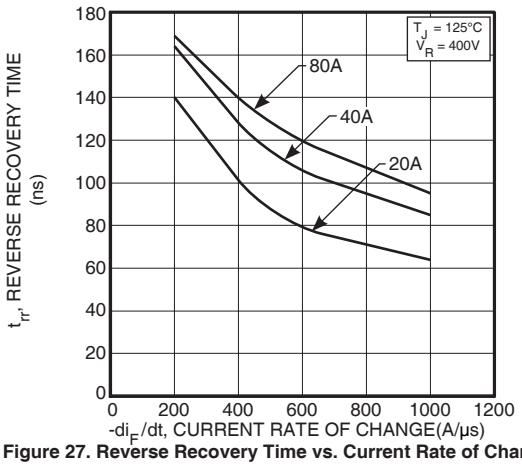

Figure 27. Reverse Recovery Time vs. Current Rate of Change

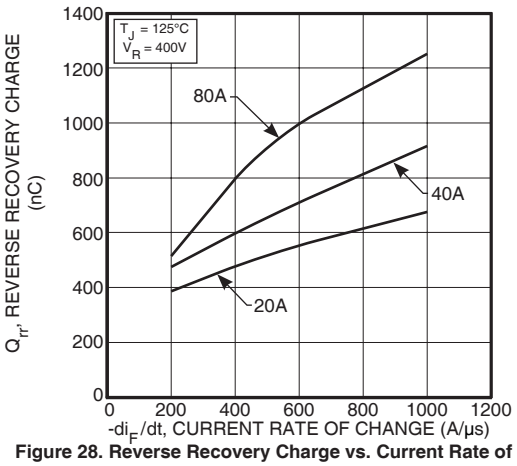

Figure 28. Reverse Recovery Charge vs. Current Rate of Change

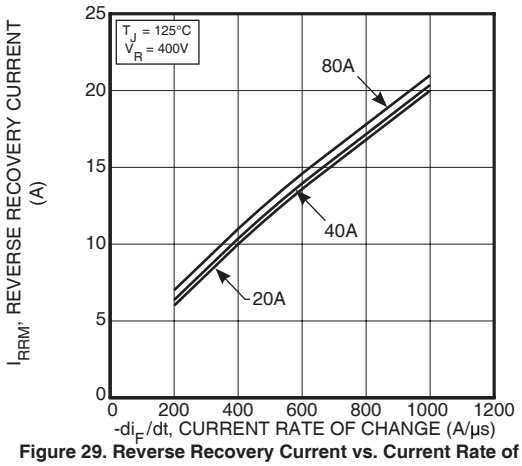

Figure 29. Reverse Recovery Current vs. Current Rate of Change

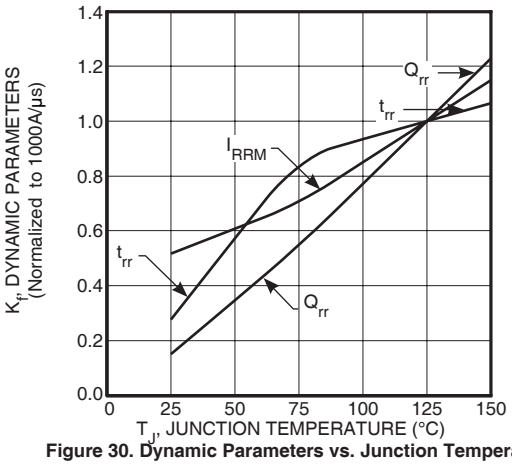

Figure 30. Dynamic Parameters vs. Junction Temperature

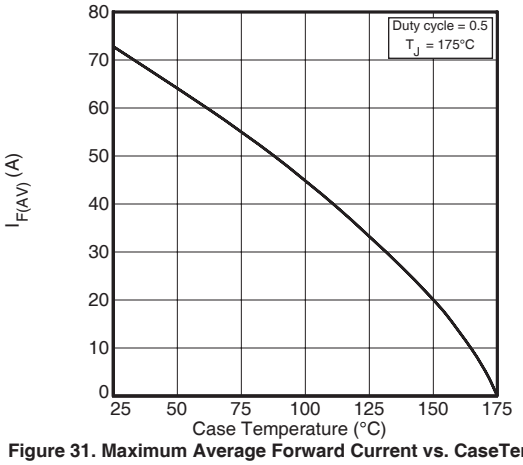

Figure 31. Maximum Average Forward Current vs. CaseTemperature

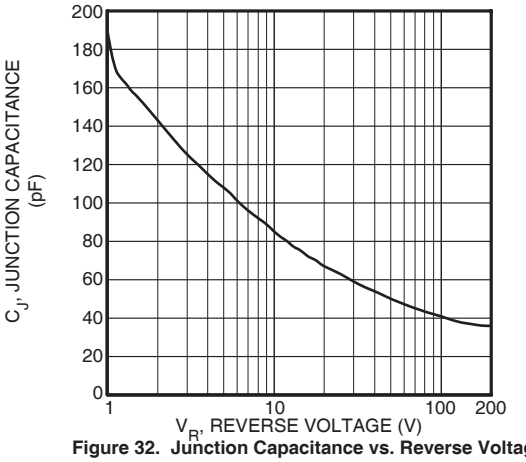

Figure 32. Junction Capacitance vs. Reverse Voltage

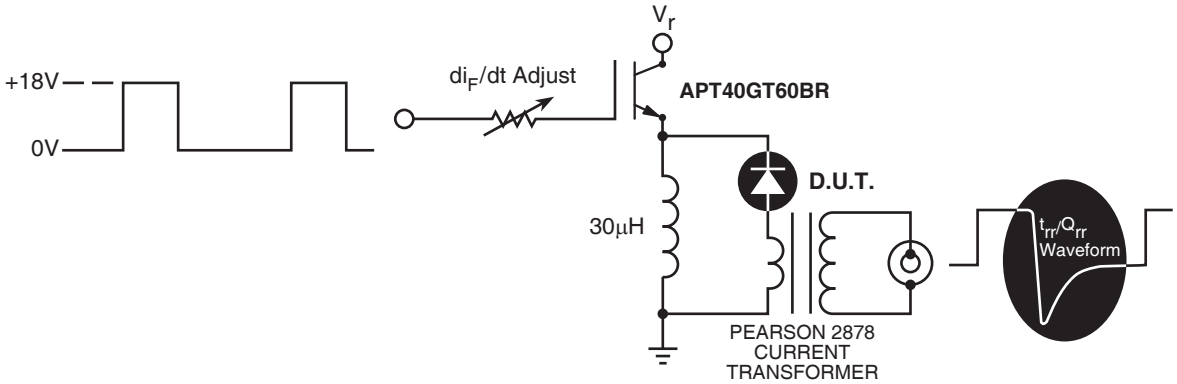

Figure 33. Diode Test Circuit

1. I_F - Forward Conduction Current
2. di_F/dt - Rate of Diode Current Change Through Zero Crossing.
3. I_{RRM} - Maximum Reverse Recovery Current.
4. t_{rr} - Reverse Recovery Time, measured from zero crossing where diode current goes from positive to negative, to the point at which the straight line through I_{RRM} and $0.25 \bullet I_{RRM}$ passes through zero.
5. Q_{rr} - Area Under the Curve Defined by I_{RRM} and t_{rr}.

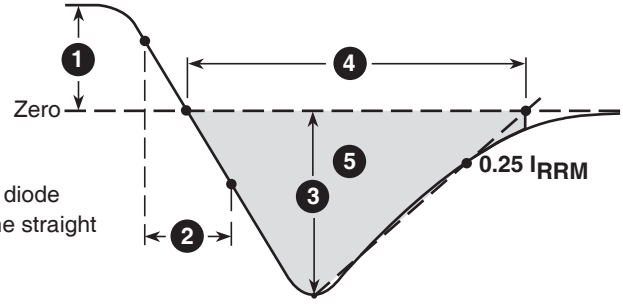

Figure 34, Diode Reverse Recovery Waveform and Definitions

TO-264MAX™ (L2) Package Outline

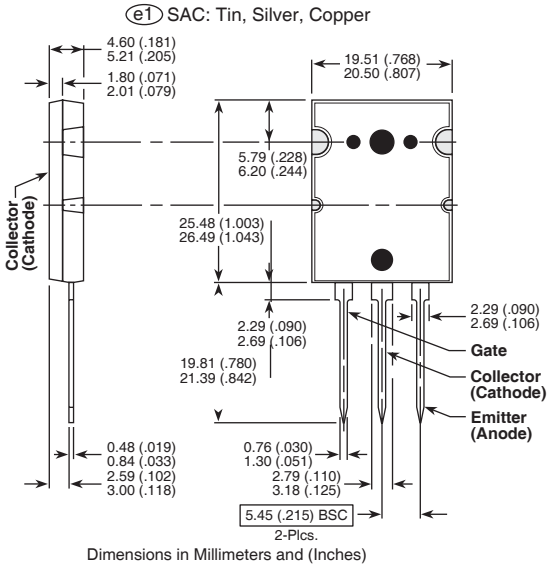

Dimensions in Millimeters and (Inches)

APT's products are covered by one or more of U.S.patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. US and Foreign patents pending. All Rights Reserved.