


## High Speed PT IGBT

POWER MOS 8® is a high speed Punch-Through switch-mode IGBT. Low  $E_{off}$  is achieved through leading technology silicon design and lifetime control processes. A reduced  $E_{off} - V_{CE(ON)}$  tradeoff results in superior efficiency compared to other IGBT technologies. Low gate charge and a greatly reduced ratio of  $C_{res}/C_{ies}$  provide excellent noise immunity, short delay times and simple gate drive. The intrinsic chip gate resistance and capacitance of the poly-silicone gate structure help control  $di/dt$  during switching, resulting in low EMI, even when switching at high frequency.



### FEATURES

- Fast switching with low EMI
- Very Low  $E_{off}$  for maximum efficiency
- Ultra low  $C_{res}$  for improved noise immunity
- Low conduction loss
- Low gate charge
- Increased intrinsic gate resistance for low EMI
- RoHS compliant 

### TYPICAL APPLICATIONS

- ZVS phase shifted and other full bridge
- Half bridge
- High power PFC boost
- Welding
- UPS, solar, and other inverters
- High frequency, high efficiency industrial

### Absolute Maximum Ratings

| Symbol         | Parameter                                                       | Ratings     | Unit             |
|----------------|-----------------------------------------------------------------|-------------|------------------|
| $V_{ces}$      | Collector Emitter Voltage                                       | 900         | V                |
| $I_{C1}$       | Continuous Collector Current @ $T_c = 25^\circ\text{C}$         | 145         | A                |
| $I_{C2}$       | Continuous Collector Current @ $T_c = 100^\circ\text{C}$        | 80          |                  |
| $I_{CM}$       | Pulsed Collector Current <sup>1</sup>                           | 239         |                  |
| $V_{GE}$       | Gate-Emitter Voltage <sup>2</sup>                               | $\pm 30$    | V                |
| $P_D$          | Total Power Dissipation @ $T_c = 25^\circ\text{C}$              | 625         | W                |
| SSOA           | Switching Safe Operating Area @ $T_j = 150^\circ\text{C}$       | 239A @ 900V |                  |
| $T_J, T_{STG}$ | Operating and Storage Junction Temperature Range                | -55 to 150  | $^\circ\text{C}$ |
| $T_L$          | Lead Temperature for Soldering: 0.063" from Case for 10 Seconds | 300         |                  |

### Static Characteristics

$T_J = 25^\circ\text{C}$  unless otherwise specified

| Symbol        | Parameter                           | Test Conditions              | Min | Typ | Max       | Unit          |
|---------------|-------------------------------------|------------------------------|-----|-----|-----------|---------------|
| $V_{BR(CEs)}$ | Collector-Emitter Breakdown Voltage | $V_{GE} = 0V, I_C = 1.0mA$   | 900 |     |           | V             |
| $V_{CE(on)}$  | Collector-Emitter On Voltage        | $V_{GE} = 15V, I_C = 47A$    |     | 2.5 | 3.1       |               |
|               |                                     | $T_J = 125^\circ\text{C}$    |     | 2.2 |           |               |
| $V_{GE(th)}$  | Gate Emitter Threshold Voltage      | $V_{GE} = V_{CE}, I_C = 1mA$ | 3   | 4.5 | 6         | $\mu\text{A}$ |
| $I_{CES}$     | Zero Gate Voltage Collector Current | $V_{CE} = 900V, V_{GE} = 0V$ |     |     | 250       |               |
|               |                                     | $T_J = 125^\circ\text{C}$    |     |     | 1000      |               |
| $I_{GES}$     | Gate-Emitter Leakage Current        | $V_{GS} = \pm 30V$           |     |     | $\pm 100$ | nA            |

### Thermal and Mechanical Characteristics

| Symbol          | Characteristic                                     | Min | Typ | Max | Unit               |
|-----------------|----------------------------------------------------|-----|-----|-----|--------------------|
| $R_{\theta JC}$ | Junction to Case Thermal Resistance                | -   | -   | 0.2 | $^\circ\text{C/W}$ |
| $W_T$           | Package Weight                                     | -   | 5.9 | -   | g                  |
| Torque          | Mounting Torque (TO-247 Package), 4-40 or M3 screw |     |     | 10  | in·lbf             |

# Dynamic Characteristics

$T_J = 25^{\circ}\text{C}$  unless otherwise specified

APT80GA90B\_S

| Symbol       | Parameter                     | Test Conditions                                                                                                                                          | Min | Typ  | Max | Unit          |
|--------------|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----|------|-----|---------------|
| $C_{ies}$    | Input Capacitance             | Capacitance<br>$V_{GE} = 0V, V_{CE} = 25V$<br>$f = 1\text{MHz}$                                                                                          |     | 4560 |     | pF            |
| $C_{oes}$    | Output Capacitance            |                                                                                                                                                          |     | 411  |     |               |
| $C_{res}$    | Reverse Transfer Capacitance  |                                                                                                                                                          |     | 62   |     |               |
| $Q_g^3$      | Total Gate Charge             | Gate Charge<br>$V_{GE} = 15V$<br>$V_{CE} = 450V$<br>$I_C = 47A$                                                                                          |     | 200  |     | nC            |
| $Q_{ge}$     | Gate-Emitter Charge           |                                                                                                                                                          |     | 30   |     |               |
| $Q_{gc}$     | Gate- Collector Charge        |                                                                                                                                                          |     | 72   |     |               |
| SSOA         | Switching Safe Operating Area | $T_J = 150^{\circ}\text{C}, R_G = 4.7\Omega^4, V_{GE} = 15V,$<br>$L = 100\mu\text{H}, V_{CE} = 900V$                                                     | 239 |      |     | A             |
| $t_{d(on)}$  | Turn-On Delay Time            | Inductive Switching ( $25^{\circ}\text{C}$ )<br>$V_{CC} = 600V$<br>$V_{GE} = 15V$<br>$I_C = 47A$<br>$R_G = 4.7\Omega^4$<br>$T_J = +25^{\circ}\text{C}$   |     | 18   |     | ns            |
| $t_r$        | Current Rise Time             |                                                                                                                                                          |     | 29   |     |               |
| $t_{d(off)}$ | Turn-Off Delay Time           |                                                                                                                                                          |     | 149  |     |               |
| $t_f$        | Current Fall Time             |                                                                                                                                                          |     | 85   |     |               |
| $E_{on2}$    | Turn-On Switching Energy      |                                                                                                                                                          |     | 1652 |     | $\mu\text{J}$ |
| $E_{off}^6$  | Turn-Off Switching Energy     |                                                                                                                                                          |     | 1389 |     |               |
| $t_{d(on)}$  | Turn-On Delay Time            | Inductive Switching ( $125^{\circ}\text{C}$ )<br>$V_{CC} = 600V$<br>$V_{GE} = 15V$<br>$I_C = 47A$<br>$R_G = 4.7\Omega^4$<br>$T_J = +125^{\circ}\text{C}$ |     | 18   |     | ns            |
| $t_r$        | Current Rise Time             |                                                                                                                                                          |     | 31   |     |               |
| $t_{d(off)}$ | Turn-Off Delay Time           |                                                                                                                                                          |     | 192  |     |               |
| $t_f$        | Current Fall Time             |                                                                                                                                                          |     | 128  |     |               |
| $E_{on2}$    | Turn-On Switching Energy      |                                                                                                                                                          |     | 2813 |     | $\mu\text{J}$ |
| $E_{off}^6$  | Turn-Off Switching Energy     |                                                                                                                                                          |     | 2082 |     |               |

1 Repetitive Rating: Pulse width and case temperature limited by maximum junction temperature.

2 Pulse test: Pulse Width  $< 380\mu\text{s}$ , duty cycle  $< 2\%$ .

3 See Mil-Std-750 Method 3471.

4  $R_G$  is external gate resistance, not including internal gate resistance or gate driver impedance. (MIC4452)

5  $E_{on2}$  is the clamped inductive turn on energy that includes a commutating diode reverse recovery current in the IGBT turn on energy loss. A combi device is used for the clamping diode.

6  $E_{off}$  is the clamped inductive turn-off energy measured in accordance with JEDEC standard JESD24-1.

Microsemi reserves the right to change, without notice, the specifications and information contained herein.

# Typical Performance Curves

APT80GA90B\_S

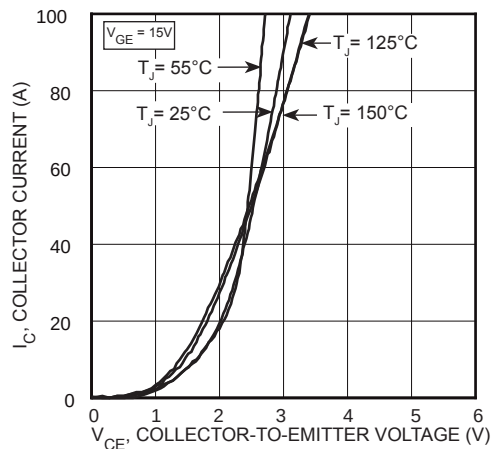


FIGURE 1, Output Characteristics ( $T_J = 25^\circ\text{C}$ )

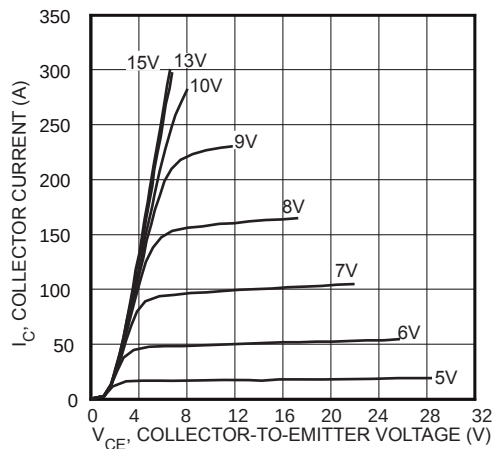


FIGURE 2, Output Characteristics ( $T_J = 25^\circ\text{C}$ )

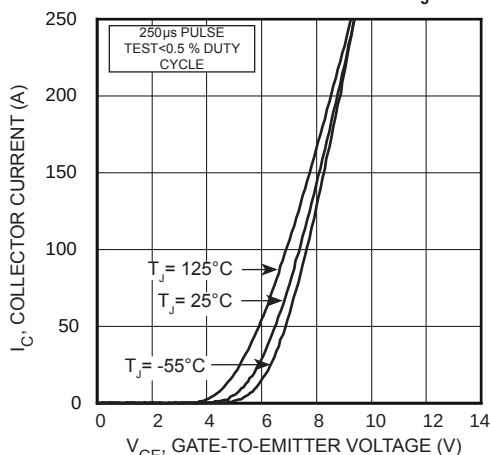


FIGURE 3, Transfer Characteristics

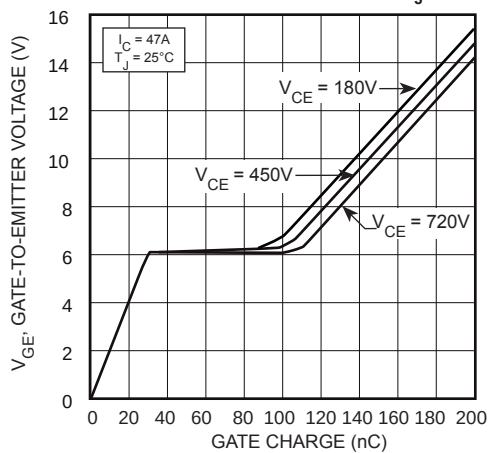


FIGURE 4, Gate charge

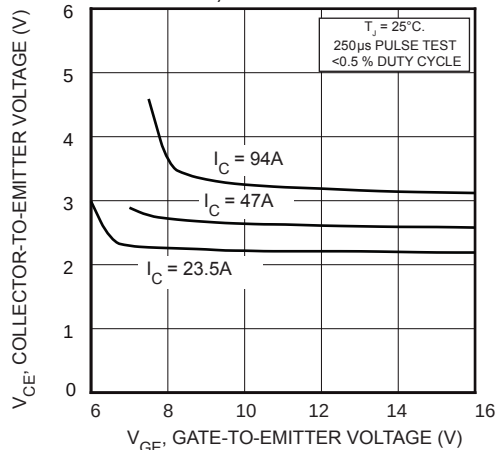


FIGURE 5, On State Voltage vs Gate-to-Emitter Voltage

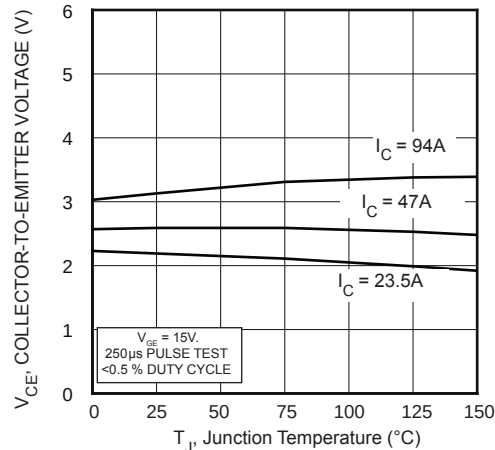


FIGURE 6, On State Voltage vs Junction Temperature

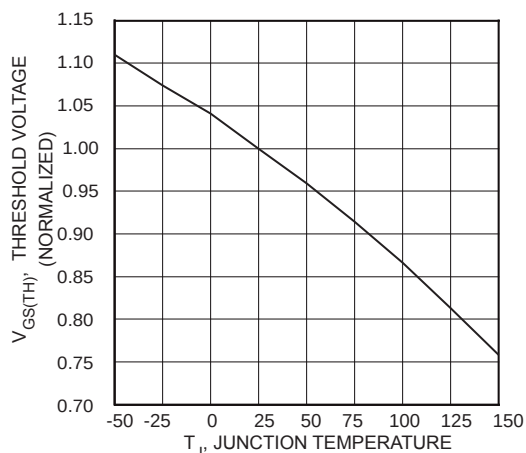


FIGURE 7, Threshold Voltage vs Junction Temperature

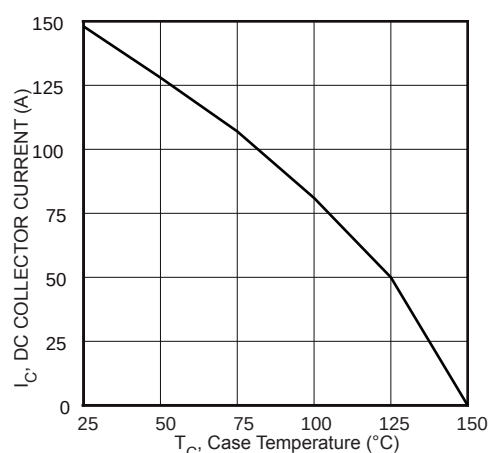


FIGURE 8, DC Collector Current vs Case Temperature

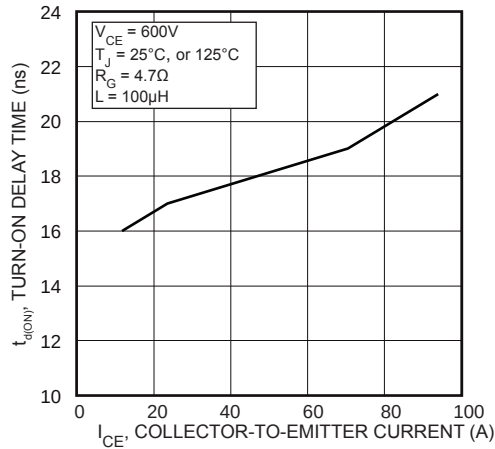


FIGURE 9, Turn-On Delay Time vs Collector Current

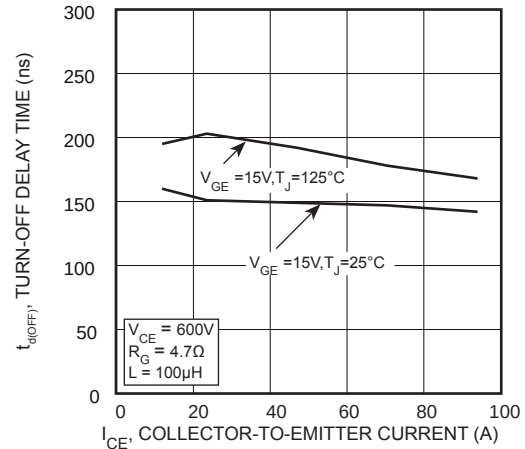


FIGURE 10, Turn-Off Delay Time vs Collector Current

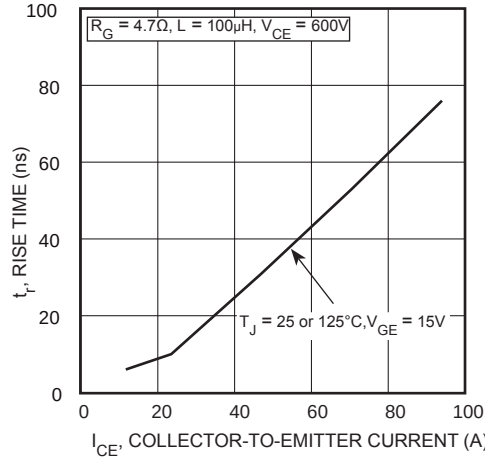


FIGURE 11, Current Rise Time vs Collector Current

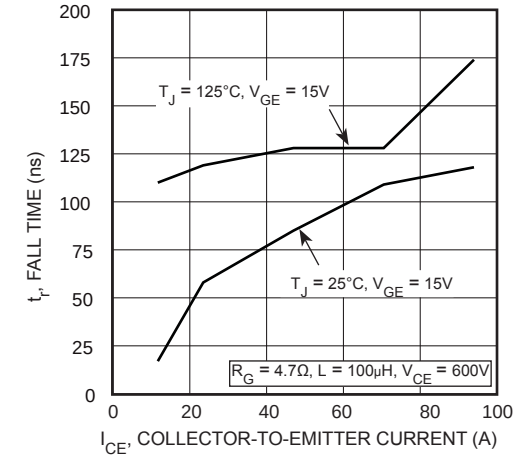


FIGURE 12, Current Fall Time vs Collector Current

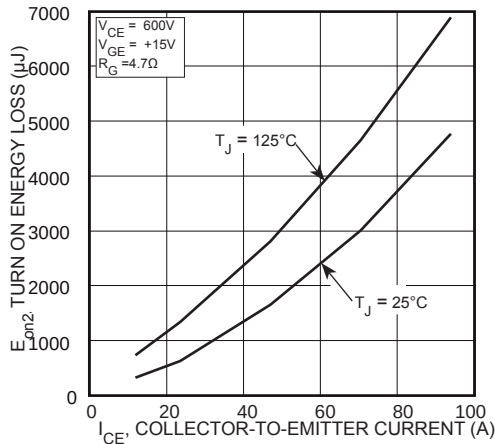


FIGURE 13, Turn-On Energy Loss vs Collector Current

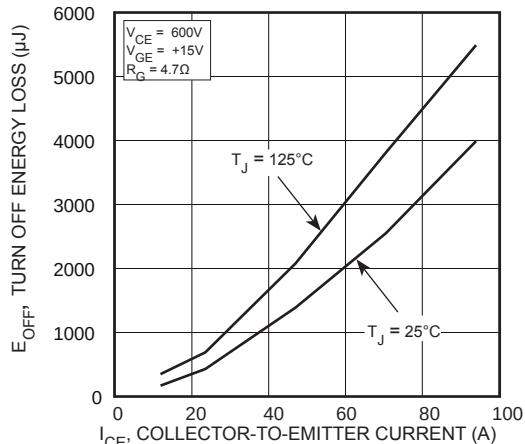


FIGURE 14, Turn-Off Energy Loss vs Collector Current

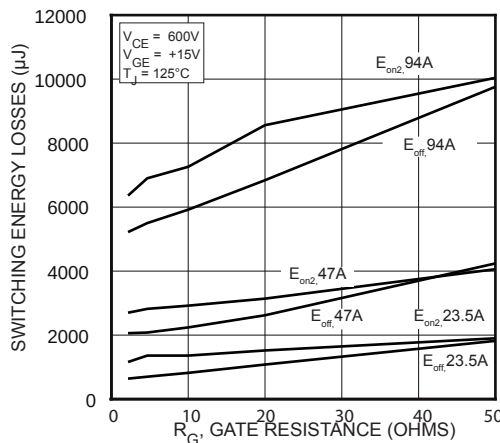


FIGURE 15, Switching Energy Losses vs Gate Resistance

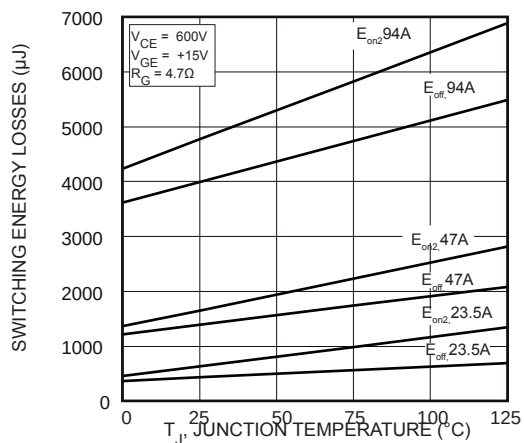
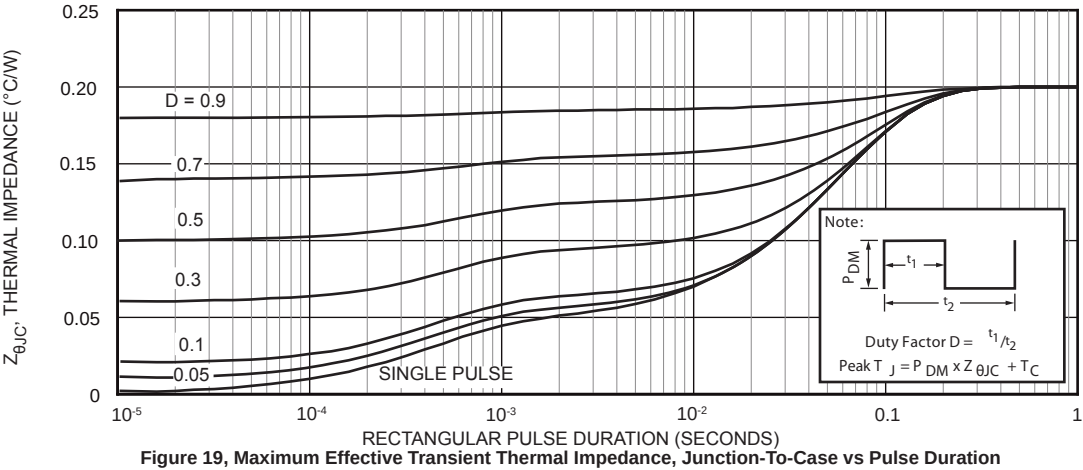
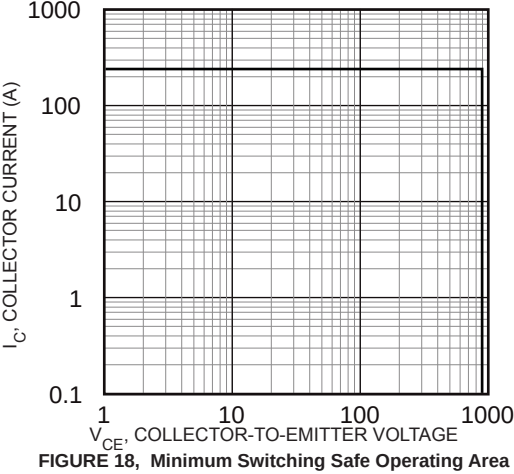
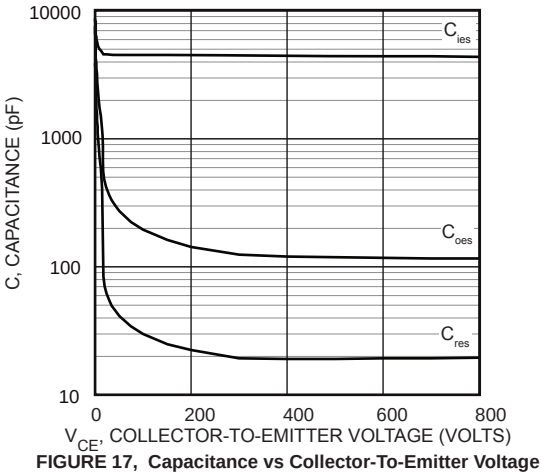


FIGURE 16, Switching Energy Losses vs Junction Temperature



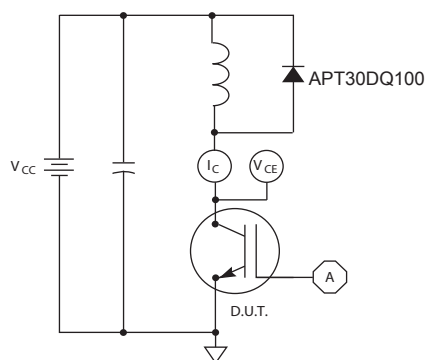


Figure 20, Inductive Switching Test Circuit

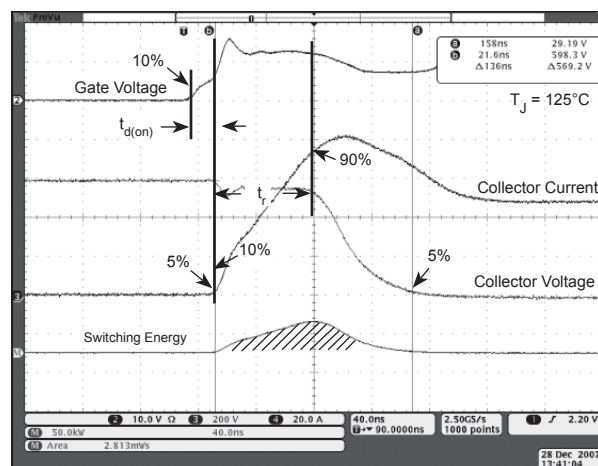


Figure 21, Turn-on Switching Waveforms and Definitions


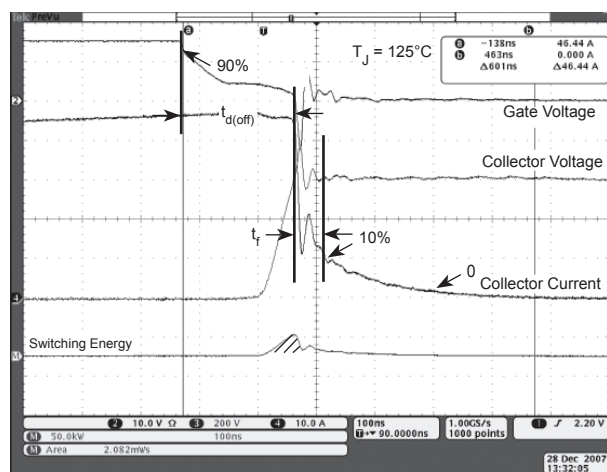


Figure 22, Turn-off Switching Waveforms and Definitions

**TO-247 (B) Package Outline**


⑥1 SAC: Tin, Silver, Copper

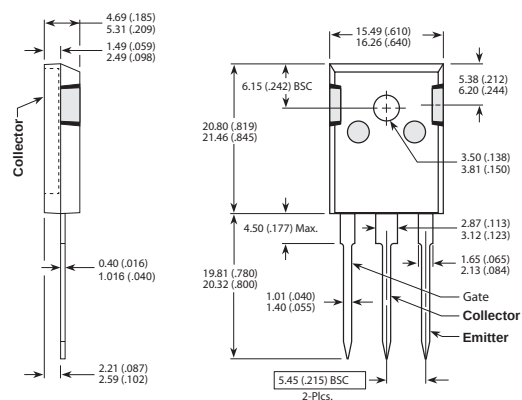

Dimensions in Millimeters (Inches)

**D<sup>3</sup>PAK Package Outline**

⑥3 100% Sn Plated

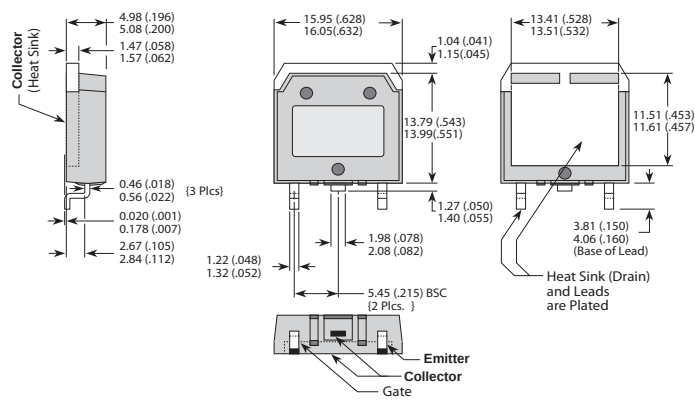

Dimensions in Millimeters (Inches)