

Flexible Ultra-Low Jitter Clock Synthesizer

Features

- Generates up to 12 Differential or Single-Ended Outputs: Frequencies up to 850 MHz
- 75 fs Phase Jitter @ 156.25 MHz (1.875 MHz to 20 MHz)
- 180 fs Phase Jitter @ 156.25 MHz (12 kHz to 20 MHz)
- PCIe Gen 1/2/3/4/5/6 Compliant
- On-Chip Power Supply Regulation for Excellent Power Supply Noise Immunity
- Two High-performance PLL Synthesizers to Generate Multiple Frequencies
- Independently Programmable Output Logic and Frequency:
 - Output Logic: LVPECL, LVDS, HCSL, LVCMOS
- Selectable Input:
 - Crystal: 12 MHz to 62.5 MHz
 - Reference Input: 12 MHz to 850 MHz
- SPI Programmable (See Flex SPI Documentation)
- No External Crystal Oscillator Capacitors Required
- 2.5V to 3.3V Operating Power Supply
- Separate Output Power Supplies:
 - Each Bank can be at Different Power Supply Voltage Levels (4 Banks of 3 Outputs Each)
- Feedback Input Pins for use as Zero Delay Buffer
- Industrial Temperature Range, -40°C to $+85^{\circ}\text{C}$
- Green, RoHS, and PFOS Compliant VQFN Packages:
 - 48-pin 7 mm $\times$ 7 mm (10 Differential or Single Ended Outputs)
 - 76-pin, 9 mm $\times$ 9 mm (12 Differential or Single-Ended Outputs)

Applications

- Ethernet 100/400/800G
- SONET/SDH
- PCI-Express Gen 1/2/3/4/5/6
- CPRI/OBSAI – Wireless Base Station
- Fibre Channel
- SAS/SATA
- DIMM (DDR2/DDR3/AMB)


General Description

The SM803xxx is a dual-PLL clock generator that achieves ultra-low phase jitter ($75 \text{ fs}_{\text{RMS}}$). With 12 total outputs and dividers on each output, this device can generate 12 different frequencies up to 850 MHz, from a low-cost quartz crystal or a reference clock input.

Each of 12 outputs can be independently programmed to LVPECL, LVDS, HCSL, or LVCMOS logic. For LVCMOS, only the true side of the channel is used.


The SM803xxx is packaged in a 48-pin VQFN with up to 10 outputs or a 76-pin VQFN with 12 outputs.


Block Diagram

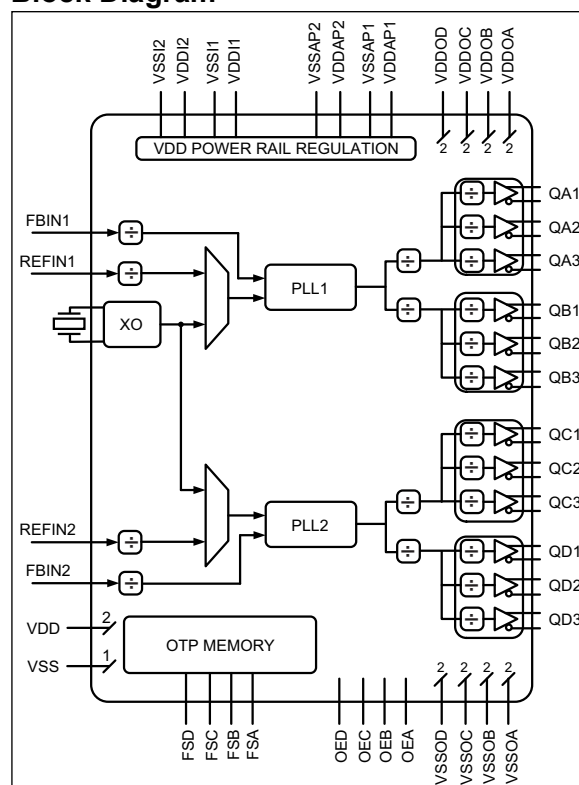

SM803XXX

Package Types

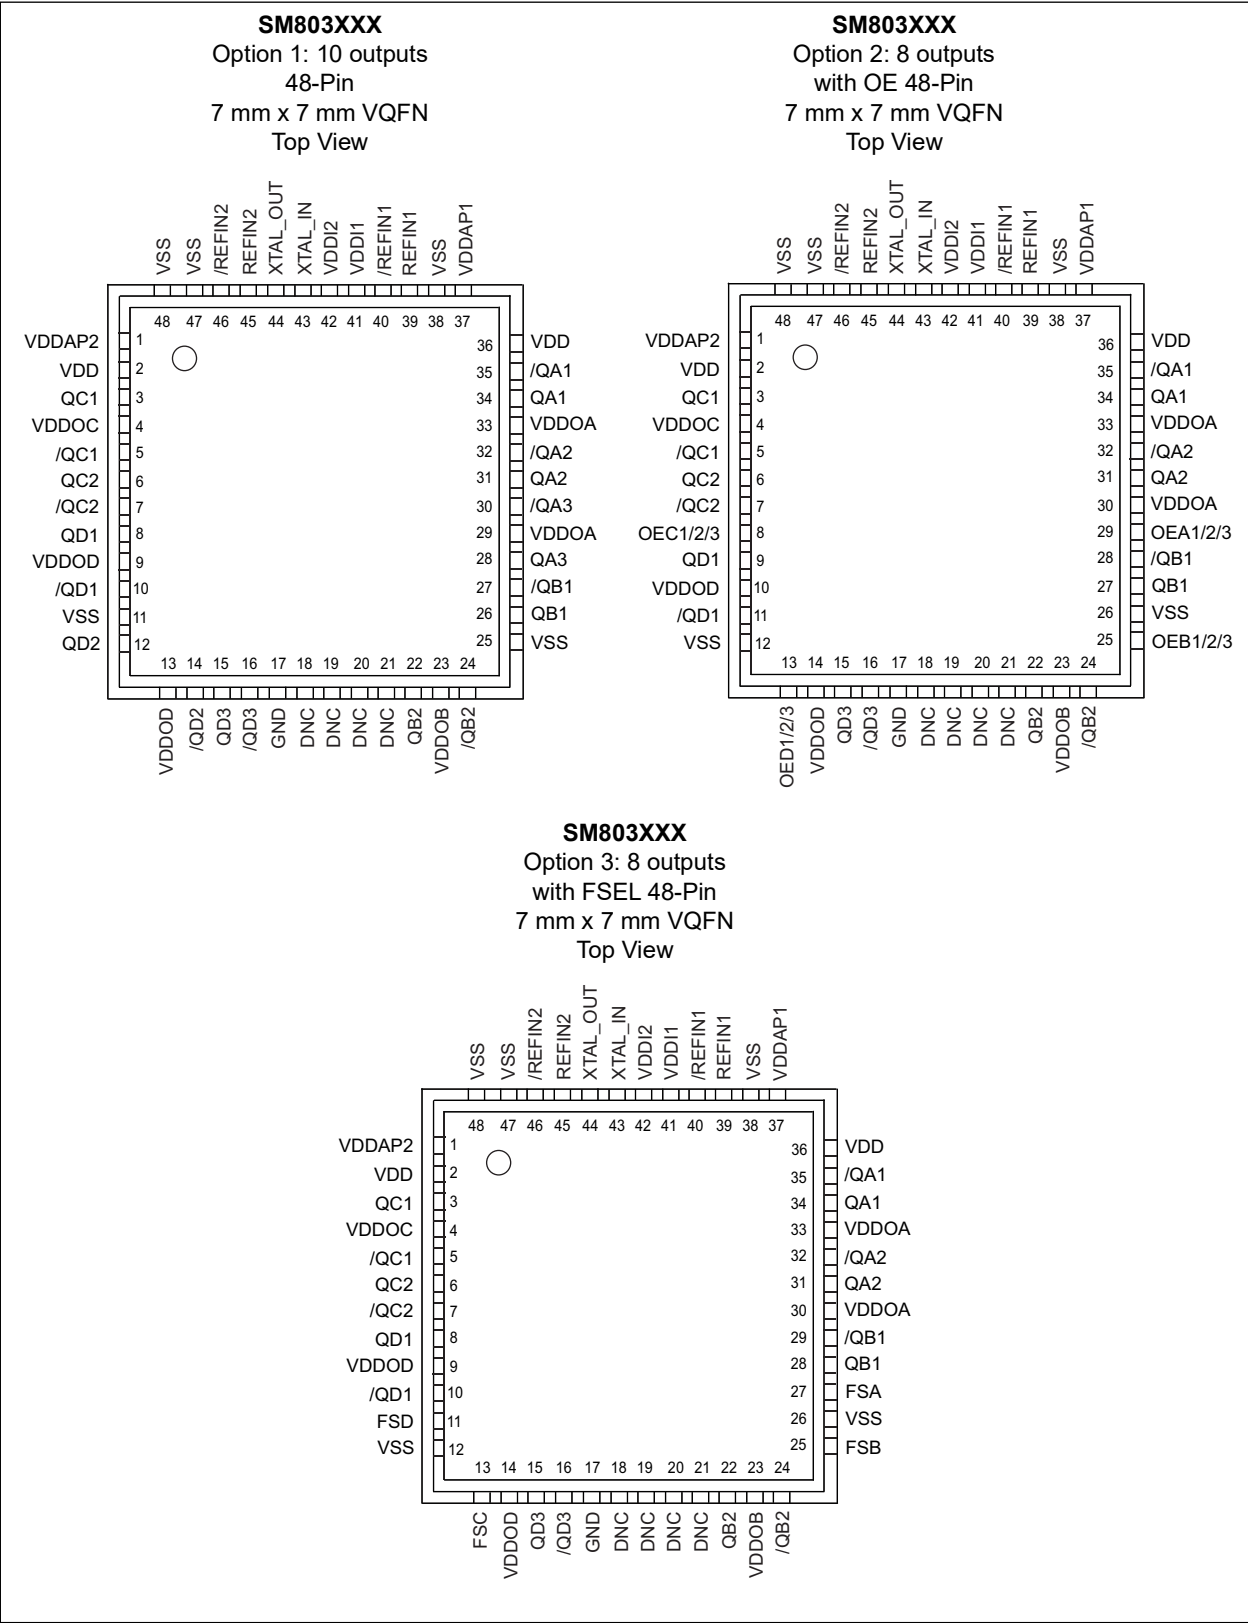

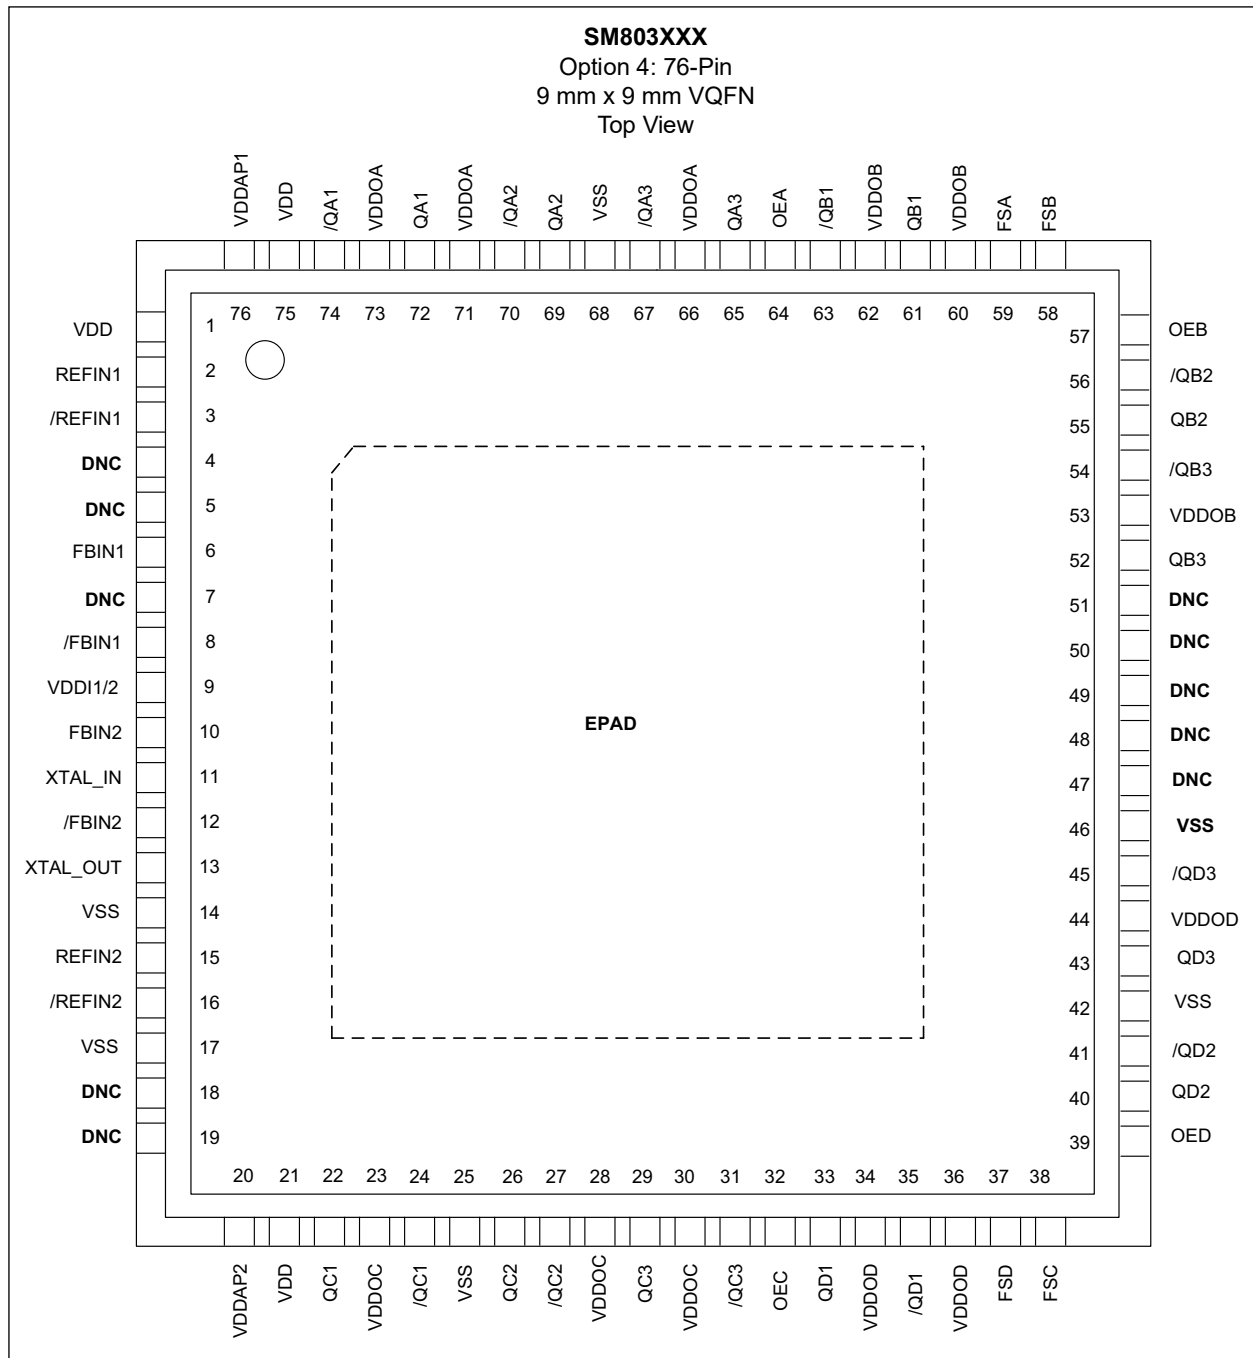

SM803XXX

1.0 ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings †

Supply Voltage (V_{DD} , V_{DDA} , V_{DDI} , V_{DDO}).....	+4.6V
Input Voltage (V_{IN}).....	–0.50V to +4.6V
ESD Machine Model.....	200V
ESD Human Body Model	2000V

Operating Ratings ††

Supply Voltage (V_{DD} , V_{DDO}).....	+2.375V to +3.465V
--	--------------------

† **Notice:** Exceeding the absolute maximum ratings may damage the device.

†† **Notice:** The device is not guaranteed to function outside its operating ratings.

ELECTRICAL CHARACTERISTICS

Electrical Characteristics: Unless otherwise indicated, typical values are for $T_A = +25^{\circ}\text{C}$. The min. and max. values are for $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$.

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Supply Voltage	V_{DD} , V_{DDO}	2.375	2.5	2.625	V	2.5V Operation
		3.135	3.3	3.465		3.3V Operation
Analog Supply Voltage	V_{DDI1} , V_{DDI2}	2.375	—	3.465	V	—
PLL Core Voltage	V_{DDA}	2.375	—	3.465	V	—
PLL Core Current Consumption	I_{DDA}	—	—	60	mA	Per active PLL
Analog Current Consumption	I_{DDI}	—	—	10	mA	—
Output Stage Current Consumption	I_{DDO}	—	—	70	mA	Per output bank, unloaded
SPI and Miscellaneous Logic	I_{DD}	—	—	8	mA	—

LVPECL DC ELECTRICAL CHARACTERISTICS

Electrical Characteristics: $V_{DDCore} = V_{DD} = V_{DD0} = 3.3V \pm 5\%$ or $2.5V \pm 5\%$, $T_A = -40^\circ C$ to $+85^\circ C$, unless otherwise noted. $R_L = 50\Omega$ to $V_{DD0} - 2V$.

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Output High Voltage	V_{OH}	$V_{DD0} - 1.35$	$V_{DD0} - 1.01$	$V_{DD0} - 0.8$	V	50Ω to $V_{DD0} - 2V$
Output Low Voltage	V_{OL}	$V_{DD0} - 2$	$V_{DD0} - 1.78$	$V_{DD0} - 1.6$	V	50Ω to $V_{DD0} - 2V$
Peak-to-Peak Output Voltage	V_{SWING}	0.65	0.77	0.95	V	Figure 5-3

LVDS DC ELECTRICAL CHARACTERISTICS

Electrical Characteristics: $V_{DDCore} = V_{DD} = V_{DD0} = 3.3V \pm 5\%$ or $2.5V \pm 5\%$, $T_A = -40^\circ C$ to $+85^\circ C$, unless otherwise noted. $R_L = 100\Omega$ between Q and /Q.

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Differential Output Voltage	V_{OD}	245	350	454	mV	Figure 5-3
Common Mode Voltage	V_{CM}	1.125	1.2	1.375	V	—
Output High Voltage	V_{OH}	1.248	1.375	1.602	V	—
Output Low Voltage	V_{OL}	0.898	1.025	1.252	V	—

HCSL DC ELECTRICAL CHARACTERISTICS

Electrical Characteristics: $V_{DDCore} = V_{DD} = V_{DD0} = 3.3V \pm 5\%$ or $2.5V \pm 5\%$, $T_A = -40^\circ C$ to $+85^\circ C$, unless otherwise noted. $R_L = 50\Omega$ to V_{SS} .

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Output High Voltage	V_{OH}	660	700	850	mV	—
Output Low Voltage	V_{OL}	-150	0	27	mV	—
Crossing Point Voltage	V_{CROSS}	—	350	—	V	—

LVC MOS DC ELECTRICAL CHARACTERISTICS

Electrical Characteristics: $V_{DDCore} = V_{DD} = V_{DD0} = 3.3V \pm 5\%$ or $2.5V \pm 5\%$, $T_A = -40^\circ C$ to $+85^\circ C$, unless otherwise noted. $R_L = 50\Omega$ to $V_{DD0}/2$.

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Output High Voltage	V_{OH}	$V_{DD} - 0.8$	—	—	V	Highest Drive (Default)
Output Low Voltage	V_{OL}	—	—	0.5	V	—
Input High Voltage	V_{IH}	$V_{DD} - 0.7$	—	$V_{DD} + 0.3$	V	—
Input Low Voltage	V_{IL}	$V_{SS} - 0.3$	—	$0.3 \times V_{DD}$	V	—
Input High Current	I_{IH}	—	—	5	μA	$V_{DD} = V_{IN} = 3.465V$
Input Low Current	I_{IL}	-150	—	—	μA	$V_{DD} = 3.465V, V_{IN} = 0V$

SM803XXX

REF_IN DC ELECTRICAL CHARACTERISTICS

Electrical Characteristics: $V_{DD} = 3.3V \pm 5\%$ to $2.5V \pm 5\%$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$.

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Input Common Mode Voltage	V_{CMR}	0.3	—	$V_{DD} - 0.3$	V	—
Input Voltage Swing	V_{SWING}	0.2	—	—	V_{PP}	—

CRYSTAL CHARACTERISTICS

Parameters	Min.	Typ.	Max.	Units	Conditions
Mode of Oscillation	Fundamental, Parallel Resonant				12 pF load typical
Frequency	12	—	62.5	MHz	—
Equivalent Series Resistance (ESR)	—	—	60	Ω	—
Load Capacitance, C_L	—	12	± 0.5	pF	—
Shunt Capacitor, C_0	—	1	2.5	pF	—
Correlation Drive Level	—	10	100	μW	—

AC ELECTRICAL CHARACTERISTICS

Electrical Characteristics: $V_{DD} = V_{DDO1/2} = 3.3V \pm 5\%$ or $2.5V \pm 5\%$; $V_{DD} = 3.3V \pm 5\%$, $V_{DDO1/2} = 3.3V \pm 5\%$ or $2.5V \pm 5\%$; $T_A = -40^\circ C$ to $+85^\circ C$

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Input Frequency	f_{IN}	12	—	62.5	MHz	XO
		12	—	850	MHz	Reference input
Output Frequency	f_{OUT}	12	—	850	MHz	LVPECL, LVDS, HCSL
		12	—	250	MHz	LVC MOS
Output Rise/Fall Time (Note 1)	t_R/t_F	85	135	350	ps	LVPECL output
		85	140	300	ps	LVDS output
		175	200	400	ps	HCSL output
		100	200	400	ps	LVC MOS output (default drive)
Output Duty Cycle	ODC	45	50	55	%	All output frequencies
		48	50	52	%	< 350 MHz output frequencies
Input to Output Propagation Delay	t_{PD}	-100	—	100	ps	ZDB mode
		—	4	—	ns	Synthesizer/Bypass mode
Output-to-Output Skew (Note 2)	t_{SKEW}	—	—	50	ps	Note 3, same output bank
PLL Lock Time	t_{LOCK}	—	5	20	ms	—
RMS Phase Jitter (Note 4, 5)	$t_{jit}(\varnothing)$	—	182	—	fs	Integration range (12 kHz - 20 MHz)
		—	74	—		Integration range (1.875 MHz - 20 MHz)
PCIe Refclk Jitter	$t_{jphPCIe6_CC}$	—	6	12	f_{SRMS}	PCIe Gen 6 (64 GT/s) in Clock Generator Mode

Note 1: See Figure 5-4.

- 2:** Output-to-output skew is defined as skew between outputs at the same supply voltage and with equal load conditions. It is measured at the output differential crossing points.
- 3:** Output-to-output skew is only defined for outputs in the same PLL bank [A:B, C:D] with the same output logic type setting.
- 4:** All phase noise measurements were taken with an Agilent 5052B phase noise system.
- 5:** Measured using a 50 MHz crystal as the input reference source. If using an external reference input, use a low phase noise source. With an external reference, the phase noise will follow the input source phase noise up to about 1 MHz.

TEMPERATURE SPECIFICATIONS (Note 1)

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Temperature Ranges						
Ambient Temperature Range	T_A	-40	—	+85	°C	—
Lead Temperature	—	—	+260	—	°C	Soldering, 20s
Case Temperature	—	—	+115	—	°C	—
Storage Temperature Range	T_S	-65	—	+150	°C	—
Package Thermal Resistances						
Junction Thermal Resistance, 7 mm x 7 mm VQFN-48Ld	θ_{JA}	—	24.22	—	°C/W	Still Air
Junction Thermal Resistance, 9 mm x 9 mm VQFN-76Ld	θ_{JA}	—	25	—	°C/W	Still Air

Note 1: The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction to air (i.e., T_A , T_J , θ_{JA}). Exceeding the maximum allowable power dissipation will cause the device operating junction temperature to exceed the maximum +85°C rating. Sustained junction temperatures above +85°C can impact the device reliability.

2.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in [Table 2-1](#).

TABLE 2-1: PIN FUNCTION TABLE

Pin Numbers by Package Option				Pin Name	Pin Type	Pin Level	Pin Function
#1 48-pin	#2 48-pin	#3 48-pin	#4 76-pin				
34	34	34	72	QA1	O, (DIF/SE)	LVPECL LVDS HCSL LVCMOS (Q only)	Differential / SE Clock Output (LVCMOS)
35	35	35	74	/QA1			
31	31	31	69	QA2			
32	32	32	70	/QA2			
28	—	—	65	QA3			
30	—	—	67	/QA3			
26	27	28	61	QB1			
27	28	29	63	/QB1			
22	22	22	55	QB2			
24	24	24	56	/QB2			
—	—	—	52	QB3			
—	—	—	54	/QB3			
3	3	3	22	QC1			
5	5	5	24	/QC1			
6	6	6	26	QC2			
7	7	7	27	/QC2			
—	—	—	29	QC3			
—	—	—	31	/QC3			
8	9	8	33	QD1			
10	11	10	35	/QD1			
12	—	—	40	QD2	I, (SE)	LVCMOS	Frequency Select, on-chip 75 kΩ pull-up 1 = Primary Selection 0 = Secondary Selection
14	—	—	41	/QD2			
15	15	15	43	QD3			
16	16	16	45	/QD3			
—	—	27	59	FSA	I, (SE)	LVCMOS	Frequency Select, on-chip 75 kΩ pull-up 1 = Primary Selection 0 = Secondary Selection
—	—	25	58	FSB			
—	—	13	38	FSC			
—	—	11	37	FSD			
2	2	2	1, 21	V _{DD}	PWR	—	Power Supply
36	36	36	75				
29	30	29	66, 71	V _{DDOA}	PWR	—	Power Supply for Outputs QA1–3
33	33	33	73				
23	23	23	53, 60	V _{DDOB}	PWR	—	Power Supply for Outputs QB1–3
—	—	—	62				
4	4	4	23	V _{DDOC}	PWR	—	Power Supply for Outputs QC1–3
—	—	—	28, 30				
9	10	9	34	V _{DDOD}	PWR	—	Power Supply for Outputs QD1–3
13	14	14	36, 44				
37	37	37	76	V _{DDAP1}	PWR	—	Power Supply for PLL1
1	1	1	20	V _{DDAP2}	PWR	—	Power Supply for PLL2

SM803XXX

TABLE 2-1: PIN FUNCTION TABLE (CONTINUED)

Pin Numbers by Package Option				Pin Name	Pin Type	Pin Level	Pin Function
#1 48-pin	#2 48-pin	#3 48-pin	#4 76-pin				
41	41	41	9	V _{DDI1}	PWR	3.3V only	Power Supply for Input circuits
42	42	42	9	V _{DDI2}	PWR	3.3V only	Power Supply for Input circuits
11	12	12	14	V _{SS} (Exposed Pad)	PWR	—	Power Supply Ground. The exposed pad must be connected to the V _{SS} ground plane.
25	26	26	17				
38	38	38	25				
47	47	47	42				
48	48	48	68				
EPAD	EPAD	EPAD	EPAD				
—	—	—	—				
—	—	—	—				
—	—	—	—				
—	—	—	—				
—	—	—	—				
—	—	—	—				
—	29	—	64	OEA1/2/3	I, (SE)	LVC MOS	Output Enable, Outputs QA1/2/3 disable to tri-state, 0 = Disabled, 1 = Enabled, on-chip 75 kΩ pull-up
—	25	—	57	OEB1/2/3	I, (SE)	LVC MOS	Output Enable, Outputs QB1/2/3 disable to tri-state, 0 = Disabled, 1 = Enabled, on-chip 75 kΩ pull-up
—	8	—	32	OEC1/2/3	I, (SE)	LVC MOS	Output Enable, Outputs QC1/2/3 disable to tri-state, 0 = Disabled, 1 = Enabled, on-chip 75 kΩ pull-up
—	13	—	39	OED1/2/3	I, (SE)	LVC MOS	Output Enable, Outputs QD1/2/3 disable to tri-state, 0 = Disabled, 1 = Enabled, on-chip 75kΩ pull-up
39	39	39	2	REFIN1 /REFIN1	I, (Diff/SE)	LVPECL LVDS HCSL LVC MOS	Reference Clock Input 1
40	40	40	3				
45	45	45	15	REFIN2 /REFIN2	I, (Diff/SE)	LVPECL LVDS HCSL LVC MOS	Reference Clock Input2
46	46	46	16				
—	—	—	6	FBIN1 /FBIN1	I, (Diff/SE)	LVPECL LVDS HCSL LVC MOS	Feedback Clock Input 1 For Zero Delay Buffer function
—	—	—	8				

TABLE 2-1: PIN FUNCTION TABLE (CONTINUED)

Pin Numbers by Package Option				Pin Name	Pin Type	Pin Level	Pin Function
#1 48-pin	#2 48-pin	#3 48-pin	#4 76-pin				
—	—	—	10	FBIN2 /FBIN2	I, (Diff/SE)	LVPECL LVDS HCSL LVCMOS	Feedback Clock Input 2 For Zero Delay Buffer function
—	—	—	12				
43	43	43	11	XTAL_IN	I, (SE)	12 pF crystal	Crystal Reference Input, no external load caps needed
44	44	44	13	XTAL_OUT	O, (SE)	12 pF crystal	Crystal Reference Output, no external load caps needed
—	—	—	4	DNC	—	—	Leave open, do not connect to anything
—	—	—	5				
—	—	—	7				
—	—	—	18, 19				
—	—	—	—	NC	—	—	Leave open or connect to V _{SS} .
—	—	—	—				
—	—	—	—				
—	—	—	—				
18	18	18	47	SPI	I/O, (SE)	LVCMOS	SPI bus pins for programming. Leave open; for normal operation, do not connect to anything. See FLEX SPI documentation for programming features.
19	19	19	48				
20	20	20	59				
21	21	21	50				
—	—	—	51				
17	17	17	46	GND	I	—	These pins are not Power Supply grounds but must be tied to V _{SS} for proper operation.
—	—	—	—				

2.1 Truth Tables

TABLE 2-2: OUTPUT ENABLE

OEA	OEB	OEC	OED	OUTPUT
0	1	1	1	3 QA outputs tri-state
1	0	1	1	3 QB outputs tri-state
1	1	0	1	3 QC outputs tri-state
1	1	1	0	3 QD outputs tri-state

TABLE 2-3: SWITCHING FREQUENCY

FSA	FSB	FSC	FSD	OUTPUT FREQUENCY
0	1	1	1	3 QA outputs: Secondary output dividers Other outputs: Primary output dividers
1	0	1	1	3 QB outputs: Secondary output dividers Other outputs: Primary output dividers
1	1	0	1	3 QC outputs: Secondary output dividers Other outputs: Primary output dividers
1	1	1	0	3 QD outputs: Secondary output dividers Other outputs: Primary output dividers

3.0 KEY PROGRAMMABLE PARAMETERS

3.1 Frequency Settings for One PLL and One Output Bank

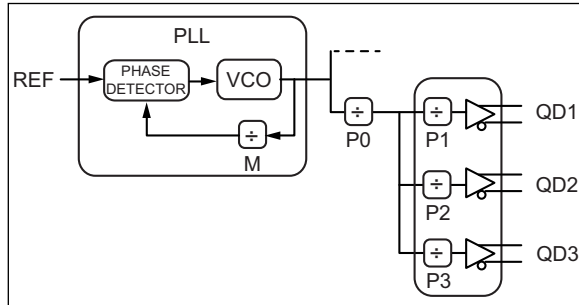


FIGURE 3-1: Frequency Settings for One PLL and One Output Bank.

The REF input frequency can be from a crystal or from a reference clock input. If a crystal is used, the REF input frequency range is 12 MHz to 62.5 MHz.

The VCO in the PLL has a range of 2875 MHz to 3510 MHz.

Counters M and P0 have a range of 4 to 259.

Counters P1, P2 and P3 have a range of 1 to 16.

EQUATION 3-1:

$$F_{VCO} = REF \times M$$

EQUATION 3-2:

$$QD1 = F_{VCO} \div (P0 \times P1)$$

EQUATION 3-3:

$$QD2 = F_{VCO} \div (P0 \times P2)$$

EQUATION 3-4:

$$QD3 = F_{VCO} \div (P0 \times P3)$$

3.2 Output Logic Programming

Available output logic types are LVPECL, LVDS, HCSL, and LVCMOS.

Each output can be programmed individually to one of the four logic types.

All logic types are differential except LVCMOS. For LVCMOS, only the true channel of the output pair is enabled and the complementary channel is disabled. With LVCMOS there is also an output drive setting. There is one setting for all LVCMOS outputs, so all LVCMOS outputs will have the same drive strength.

Unused outputs are disabled to high impedance.

3.3 Input Selection

The reference input for the PLLs can be programmed to be either a crystal or a reference clock.

The crystal oscillator circuit has capacitors on the IC so external capacitors are not required.

There are two reference clock inputs, one for each PLL. Make sure they are connected to the same reference input source. The reference inputs can be differential or single-ended and require only a small amplitude. See [Figure 3-2](#) and [Figure 3-3](#).

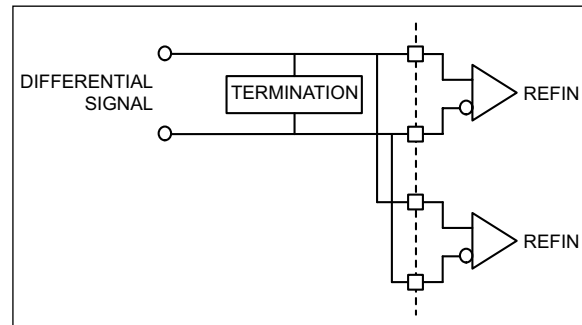


FIGURE 3-2: Differential Signal.

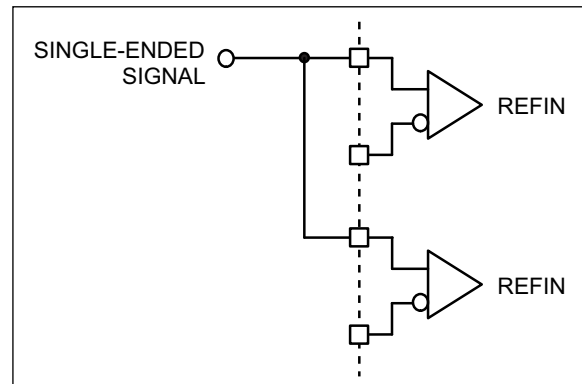


FIGURE 3-3: Single-Ended Signal.

The single-ended signal input can be LVCMOS, but smaller amplitudes like >800 mV_{pp} clipped sine wave from a TCXO will also work.

3.4 Frequency Select Programming

Each of the four output banks has a frequency select pin. For each bank, two P0, P1, P2 and P3 counter values can be programmed, a primary and a secondary value. The frequency select pin toggles between the two values assigned to each counter, changing the output frequencies.

4.0 APPLICATION INFORMATION

4.1 Input Reference

When operating with a crystal input reference, do not apply a switching signal to REF_IN.

4.2 Crystal Layout

Keep the layers under the crystal as open as possible and do not place switching signals or noisy supplies under the crystal. Crystal load capacitance is built inside the die, so no external capacitance is needed. See the [ANTC207](#) application note for further details.

4.3 Output Traces

Design the traces for the output signals according to the output logic requirements. If LVCMOS is unterminated, add a 30Ω resistor in series with the output, as close as possible to the output pin and start a 50Ω trace on the other side of the resistor.

For differential traces you can either use a differential design or two separate 50Ω traces. For EMI reasons, it is better to use a balanced differential design.

LVDS can be AC-coupled or DC-coupled to its termination.

5.0 POWER SUPPLY FILTERING RECOMMENDATIONS

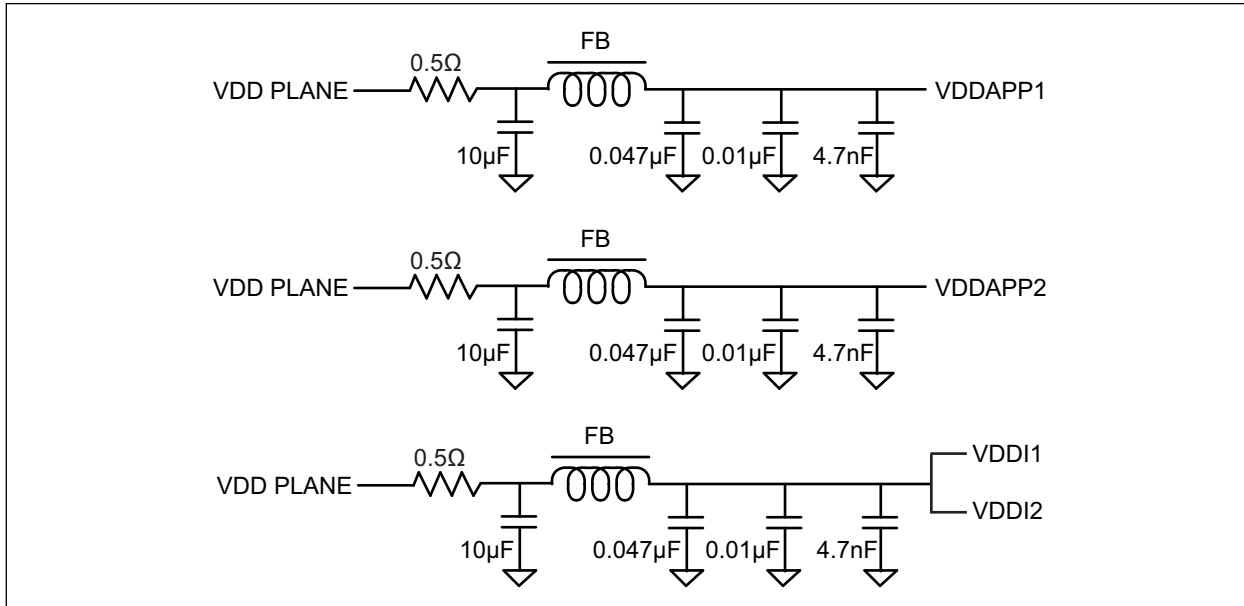


FIGURE 5-1: Recommended Power Supply Filtering.

- Use the power supply filtering shown in [Figure 5-1](#) for V_{DDAP1}, V_{DDAP2}, V_{DDI1} and V_{DDI2}.
- Connect the V_{DD0} and V_{DD} pins directly to the V_{DD} power plane.
- Connect all V_{SS} pins directly to the ground power plane.
- Recommended ferrite bead properties are 80Ω to 240Ω impedance and >250 mA saturation current.
- To improve power supply filtering beyond what a ferrite bead can provide, the Ripple Blocker™ provides a solution. MIC94300 or MIC94310 are recommended parts. The filter circuit with Ripple Blocker is shown in [Figure 5-2](#) and can be used for any of the above V_{DD} sections.

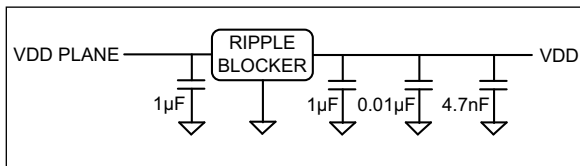


FIGURE 5-2: Power Supply Filtering with Ripple Blocker.

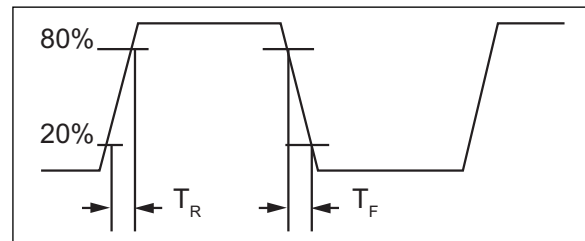


FIGURE 5-4: All Outputs Rise/Fall Time.

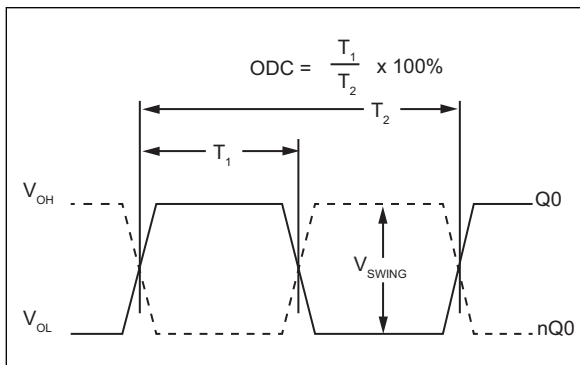


FIGURE 5-3: Duty Cycle Timing.

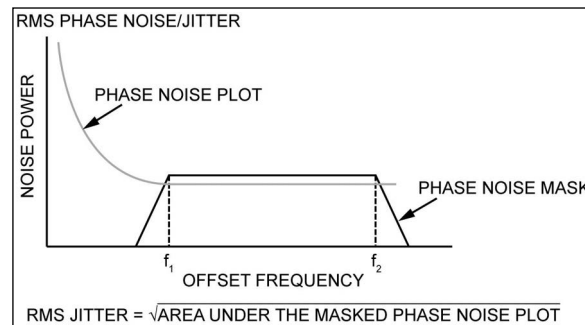


FIGURE 5-5: RMS Phase/Noise/Jitter.

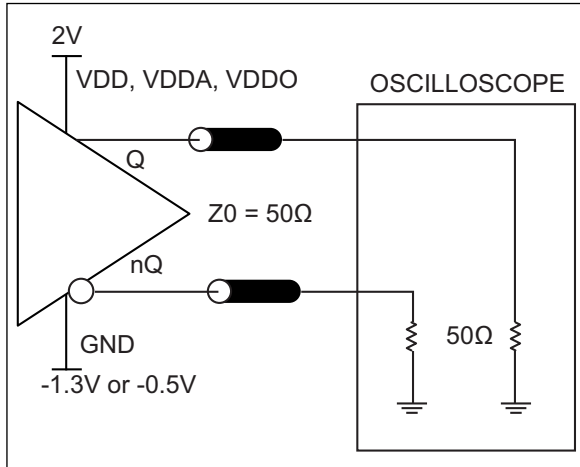


FIGURE 5-6: LVPECL Output Load and Test Circuit.

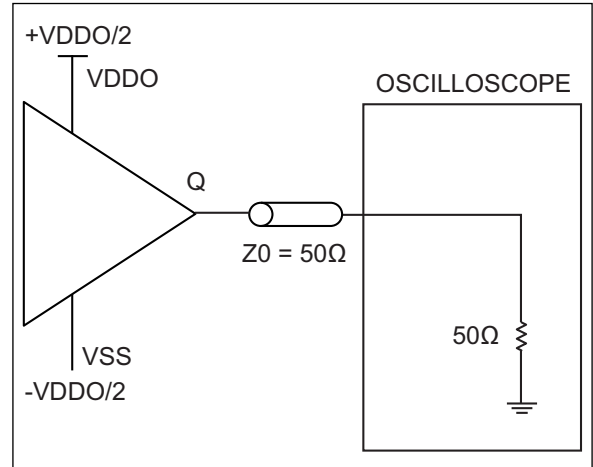


FIGURE 5-9: LVCMOS Output Load and Test Circuit.

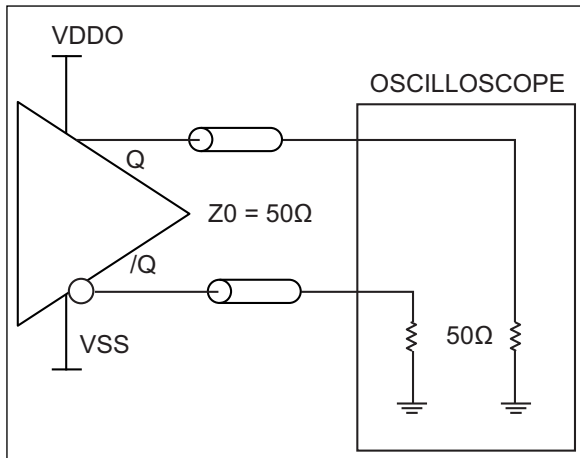


FIGURE 5-7: HCSL Output Load and Test Circuit.

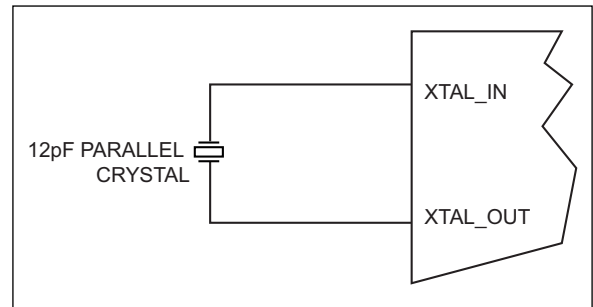


FIGURE 5-10: Crystal Input Interface.

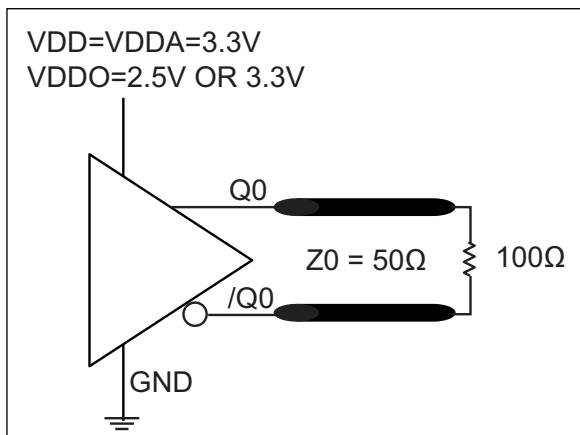


FIGURE 5-8: LVDS Output Load and Test Circuit.

6.0 PHASE NOISE PERFORMANCE

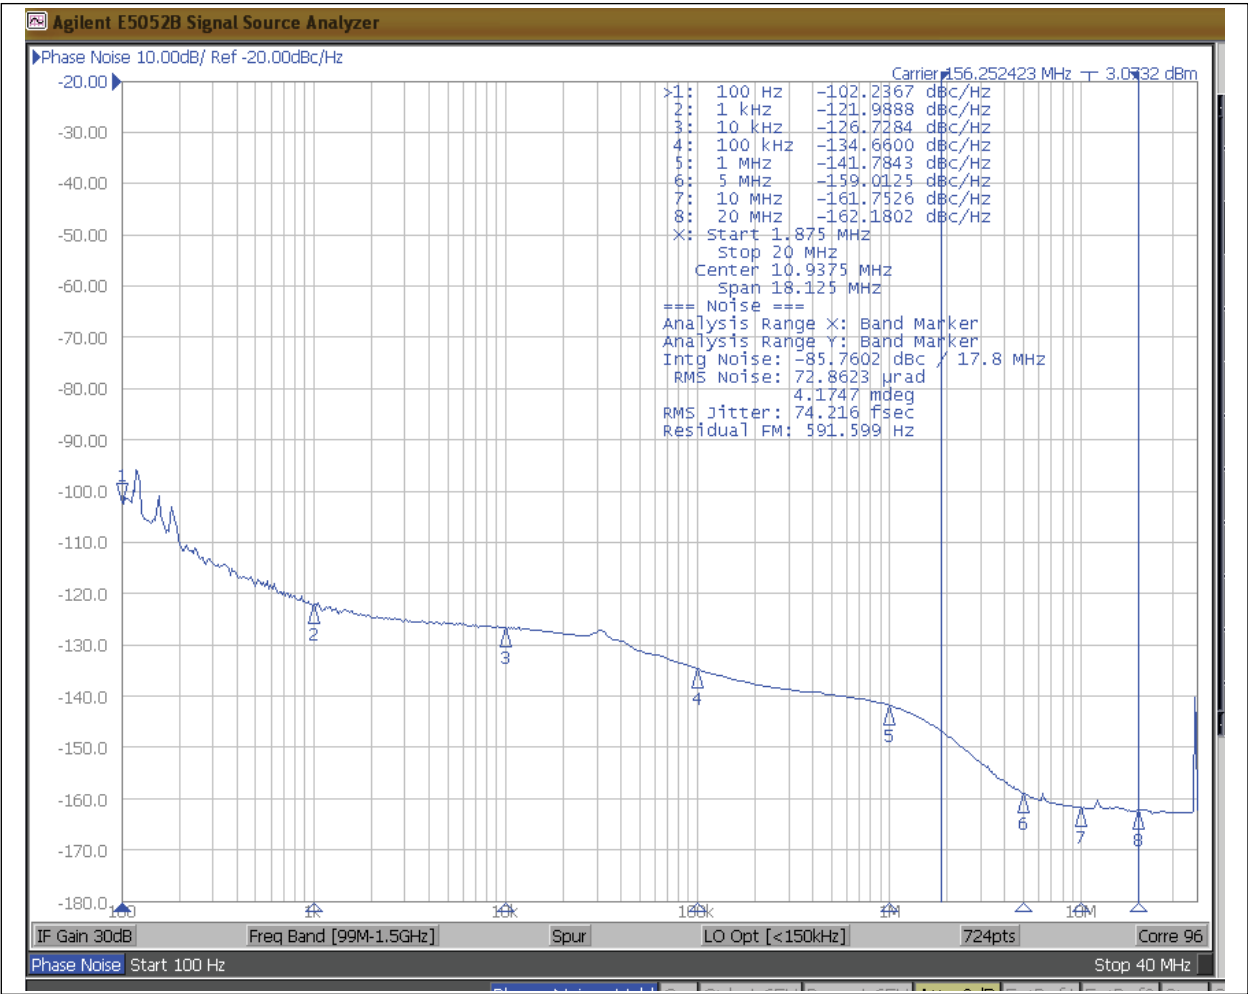


FIGURE 6-1: 156.25 MHz, Integration Range 1.875 MHz to 20 MHz: 74.2 fs_{RMS}.

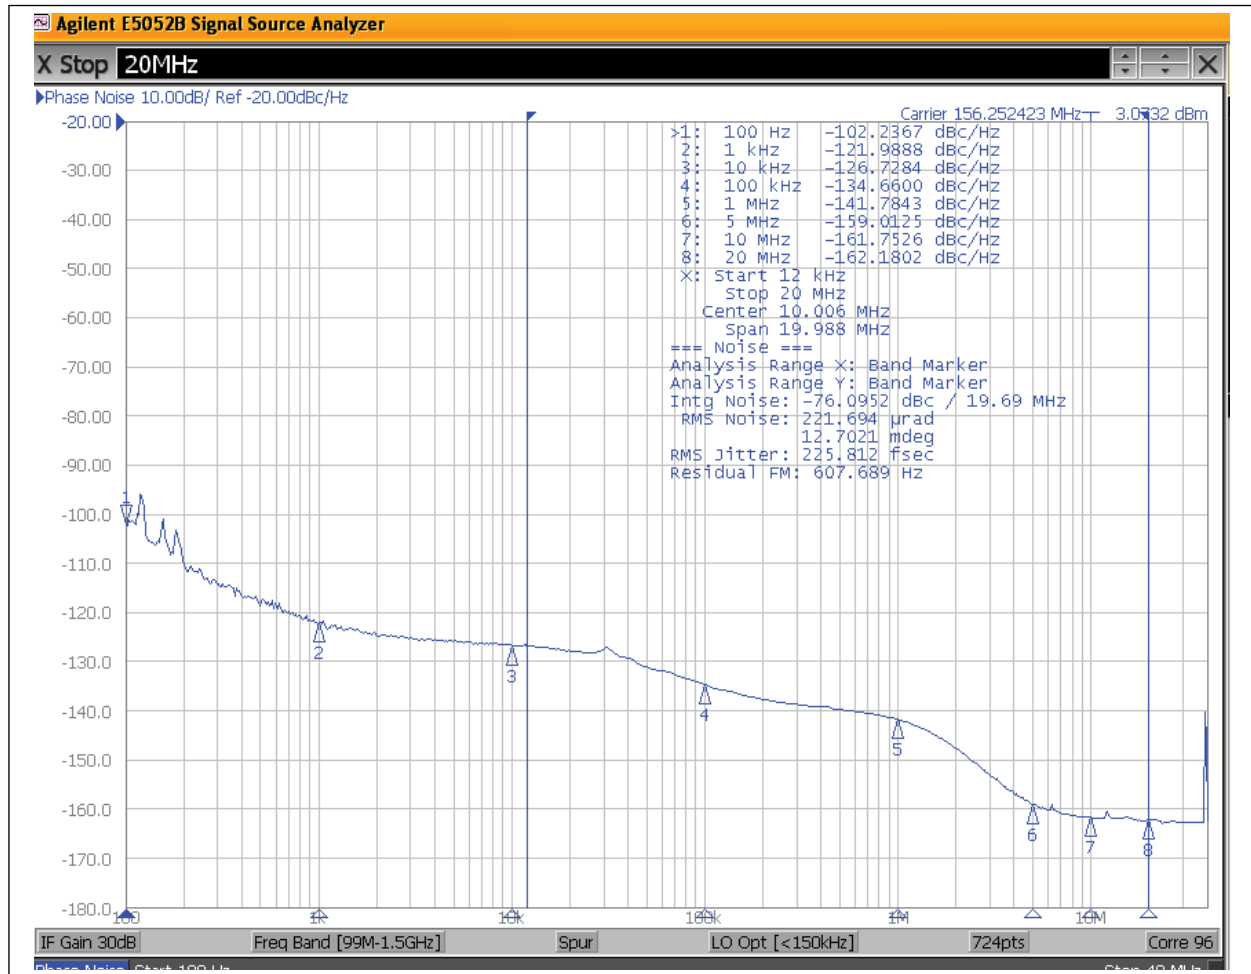


FIGURE 6-2: 156.25 MHz, Integration Range 12 kHz to 20 MHz: 225.8 fs_{RMS}.


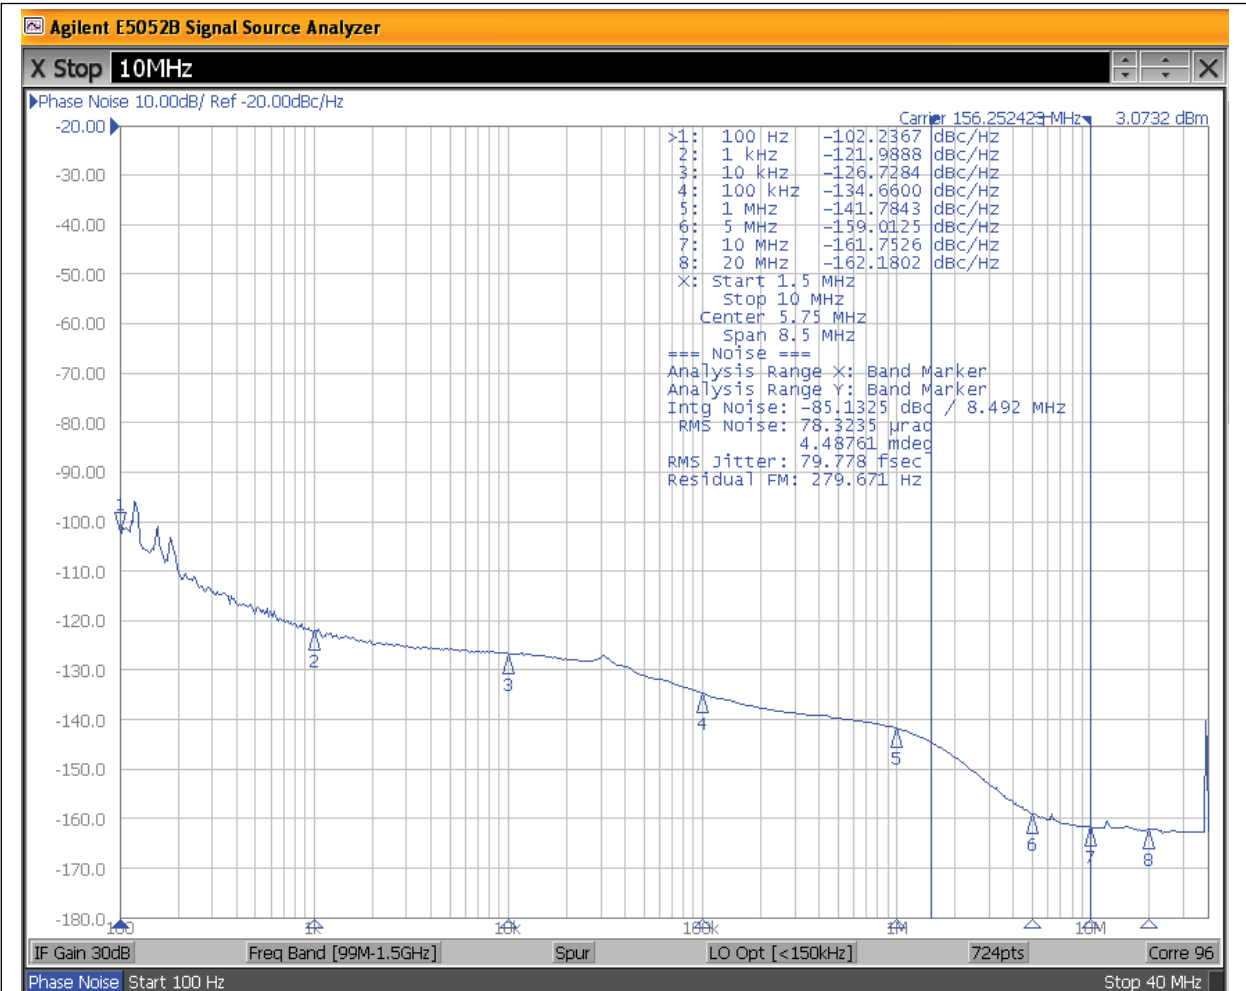


FIGURE 6-3: 156.25 MHz, Integration Range 1.5 MHz to 10 MHz: 79.8 fs_{RMS}.


7.0 PACKAGING INFORMATION

7.1 Package Marking Information

48- or 76-Lead VQFN*




Example



Legend:	XX...X	Product code or customer-specific information
	Y	Year code (last digit of calendar year)
	YY	Year code (last 2 digits of calendar year)
	WW	Week code (week of January 1 is week '01')
	NNN	Alphanumeric traceability code
	(e3)	Pb-free JEDEC® designator for Matte Tin (Sn)
	*	This package is Pb-free. The Pb-free JEDEC designator ((e3)) can be found on the outer packaging for this package.
	•, ▲, ▼	Pin one index is identified by a dot, delta up, or delta down (triangle mark).
Note:	In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo.	
	Underbar (_) and/or Overbar (¯) symbol may not be to scale.	

76-Lead Very Thin Plastic Quad Flat, No Lead Package (QBA) - 9x9 mm Body [VQFN] With 5x5 mm Exposed Pad


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

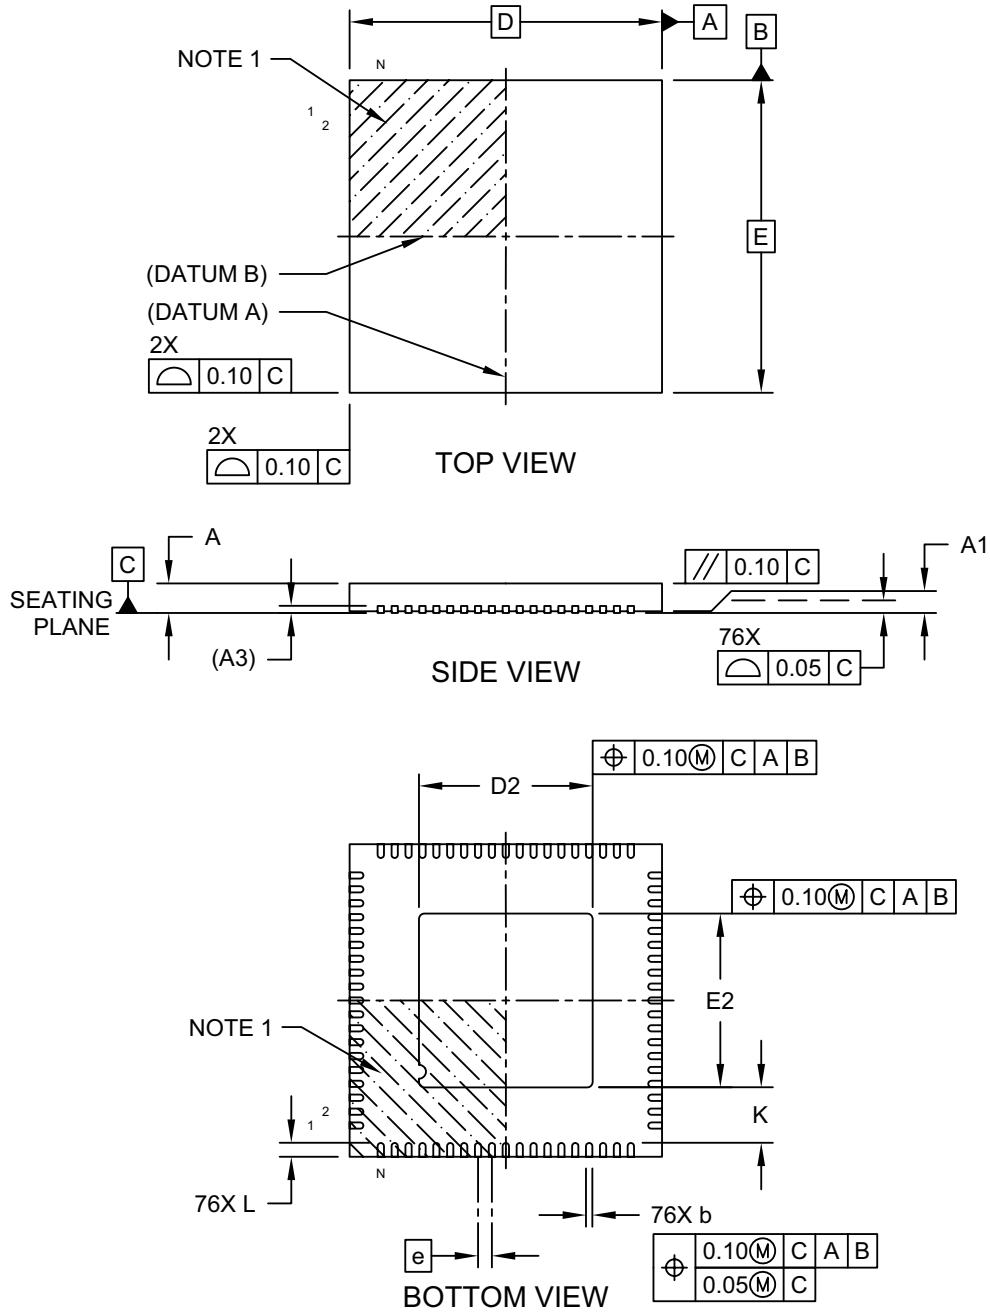

Microchip Technology Drawing C04-1195A Sheet 1 of 2

**76-Lead Very Thin Plastic Quad Flat, No Lead Package (QBA) - 9x9 mm Body [VQFN]
With 5x5 mm Exposed Pad**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

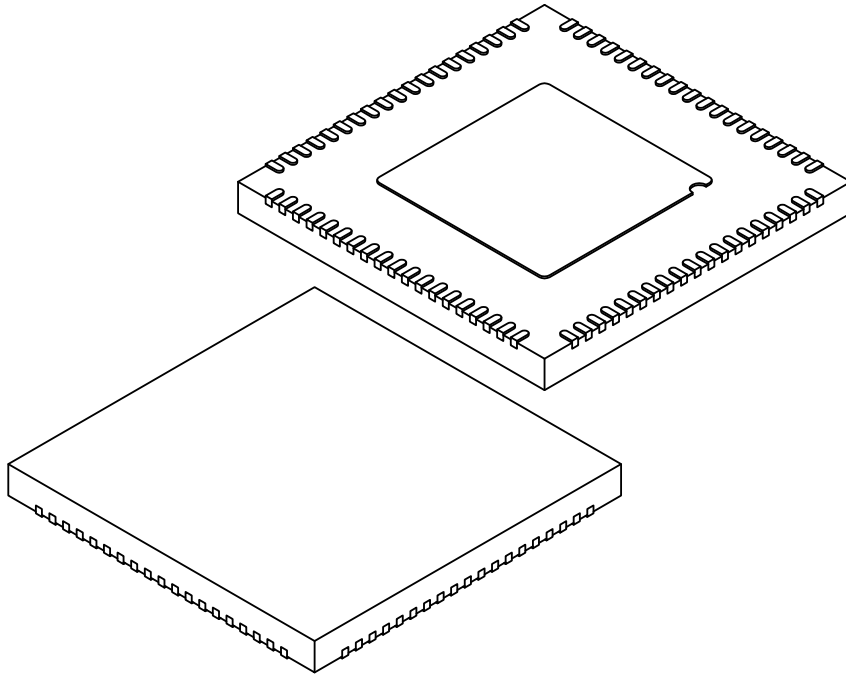

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		76		
Pitch	e		0.40 BSC		
Overall Height	A		0.80	0.85	0.9
Standoff	A1		0.00	0.02	0.05
Terminal Thickness	A3		0.20 REF		
Overall Length	D		9.00 BSC		
Exposed Pad Length	D2		4.90	5.00	5.10
Overall Width	E		9.00 BSC		
Exposed Pad Width	E2		4.90	5.00	5.10
Terminal Width	b		0.13	0.18	0.23
Terminal Length	L		0.35	0.40	0.45
Terminal-to-Exposed-Pad	K		0.20	-	-

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-1195A Sheet 2 of 2

76-Lead Very Thin Plastic Quad Flat, No Lead Package (QBA) - 9x9 mm Body [VQFN] With 5x5 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

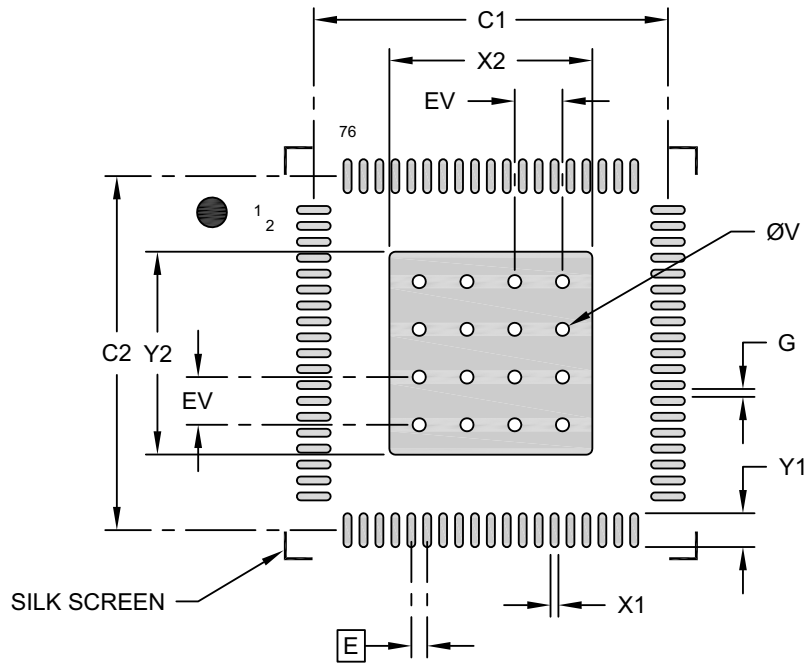

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	0.40 BSC		
Optional Center Pad Width	X2			5.10
Optional Center Pad Length	Y2			5.10
Contact Pad Spacing	C1		8.90	
Contact Pad Spacing	C2		8.90	
Contact Pad Width (X76)	X1			0.20
Contact Pad Length (X76)	Y1			0.85
Contact Pad to Contact Pad (X72)	G	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	


Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3195A

48-Lead Very Thin Plastic Quad Flat, No Lead Package (PTA) - 7x7x0.9 mm Body [VQFN] With 5.1x5.1 mm Exposed Pad; Micrel Legacy Package QFN77-48L


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

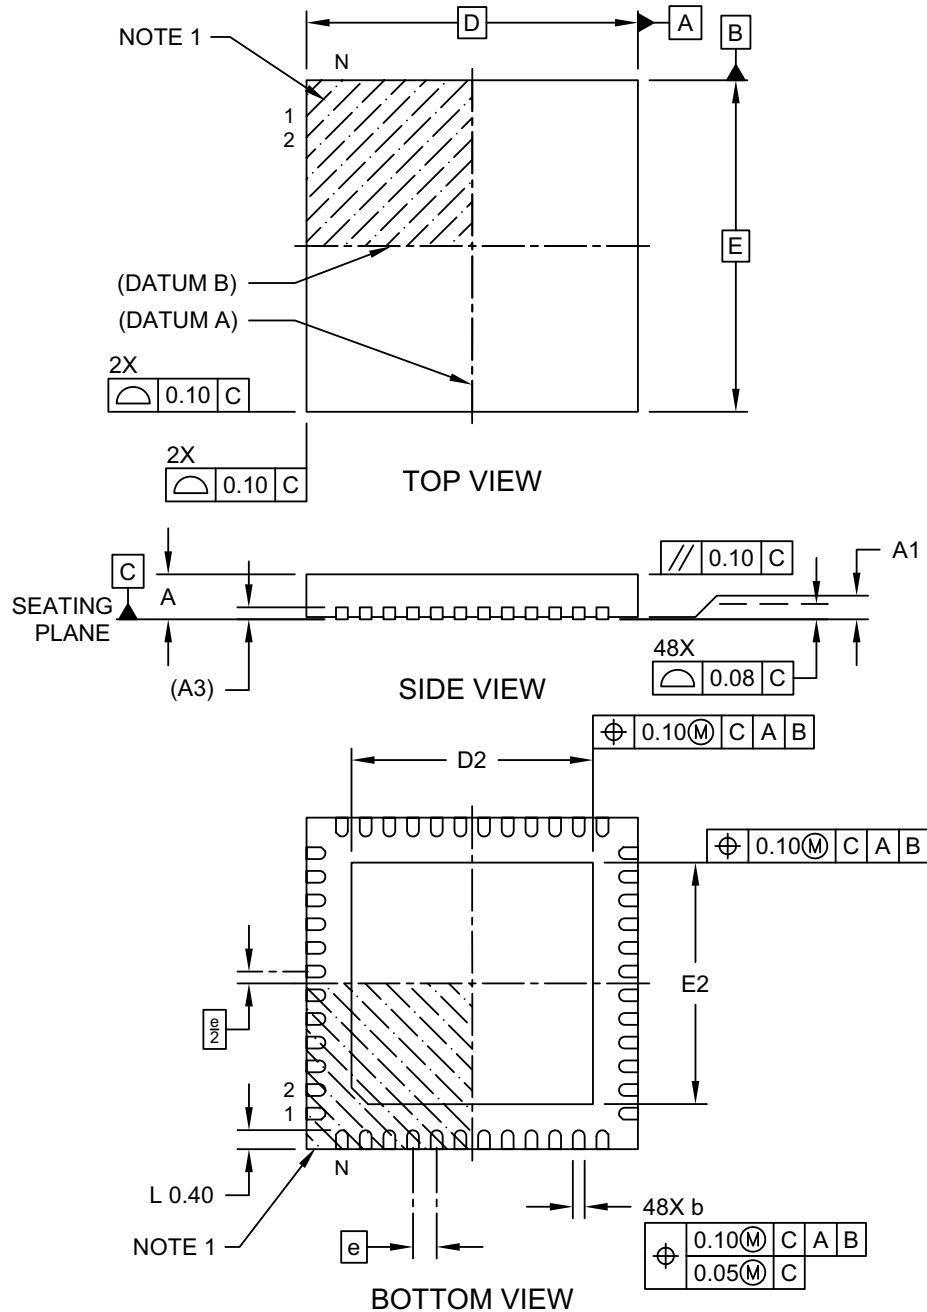

Microchip Technology Drawing C04-01270 Rev B Sheet 1 of 2

48-Lead Very Thin Plastic Quad Flat, No Lead Package (PTA) - 7x7x0.9 mm Body [VQFN] With 5.1x5.1 mm Exposed Pad; Micrel Legacy Package QFN77-48L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

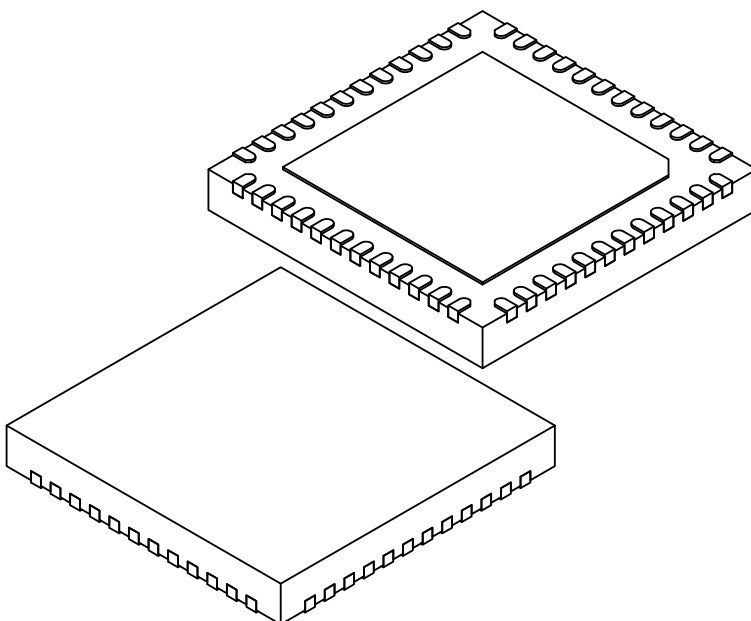

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	48		
Pitch	e	0.50 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.253 REF		
Overall Length	D	7.00 BSC		
Exposed Pad Length	D2	5.05	5.10	5.15
Overall Width	E	7.00 BSC		
Exposed Pad Width	E2	5.05	5.10	5.15
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.35	0.40	0.45


Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-01270 Rev B Sheet 2 of 2

48-Lead Very Thin Plastic Quad Flat, No Lead Package (PTA) - 7x7x0.9 mm Body [VQFN] With 5.1x5.1 mm Exposed Pad; Micrel Legacy Package QFN77-48L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

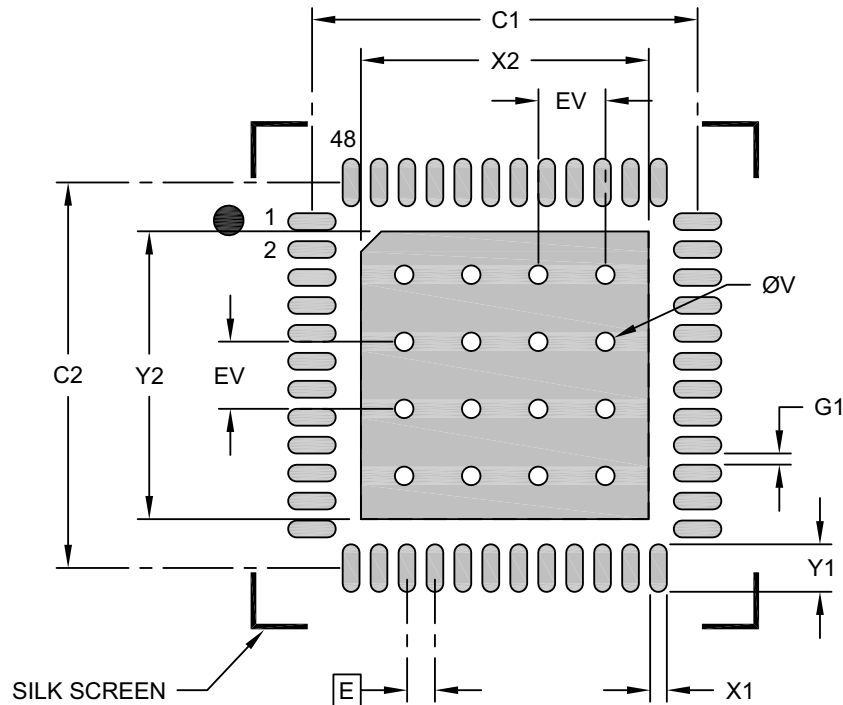

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Optional Center Pad Width	X2			5.15
Optional Center Pad Length	Y2			5.15
Contact Pad Spacing	C1		6.90	
Contact Pad Spacing	C2		6.90	
Contact Pad Width (X48)	X1			0.30
Contact Pad Length (X48)	Y1			0.85
Contact Pad to Contact Pad (X44)	G1	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3270 Rev B

SM803XXX

NOTES:

APPENDIX A: REVISION HISTORY

Revision A (January 2018)

- Converted Micrel document SM803XXX to Microchip data sheet template DS20005667A.
- Additional 76-Lead VQFN package included in [Package Types](#), [Pin Descriptions](#), and [Packaging Information](#) sections.
- Minor grammatical text changes throughout.

Revision B (January 2023)

- Updated [Applications](#) to include PCIe Gen 5 and Gen 6.

Revision C (October 2024)

- Added PCIe Compliance bullet to [Features](#).
- Updated Gigabit Ethernet bullet in [Applications](#).
- Updated all package outline drawings and added the [Package Marking Information](#) section.
- Updated all instances of QFN in the document to VQFN.
- Added Refclk Jitter row to [AC Electrical Characteristics](#) table.
- Removed 84-lead VQFN option throughout the document.

SM803XXX

NOTES:

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

PART NO.				
Device	Voltage Option	Package Type	Temperature	Special Processing
Device: SM803XXX: Flexible Ultra-Low Jitter Clock Synthesizer				
Voltage Option:	U	=	2.5V/3.3V	
Package Type:	M	=	48-Pin VQFN or 76-Pin VQFN	
Temperature:	G	=	–40°C to +85°C (NiPdAu Lead Free)	
	Y	=	–40°C to +85°C (Matte-Sn Lead Free)	
Special Processing:	Blank	=	Tray	
	TR	=	Tape and Reel	

Package Option (Note 1)	VQFN Package	# of Outputs	OE Control	FSEL Control
1	48-pin, 7 mm × 7 mm	10	No	No
2	48-pin, 7 mm × 7 mm	8	Yes	No
3	48-pin, 7 mm × 7 mm	8	No	Yes
4	76-pin, 9 mm × 9 mm	12	Yes	Yes

Note 1: Use the web tool at <http://clockworks.microchip.com/timing/> to determine the desired configuration.

Examples:

- a) SM803xxxUMG:
Flexible Ultra-Low Jitter Clock Synthesizer, 2.5/3.3V Voltage, 48-Pin or 76-Pin VQFN, –40°C to +85°C (NiPdAu Lead Free), Tray
- b) SM803xxxUMG-TR:
Flexible Ultra-Low Jitter Clock Synthesizer, 2.5/3.3V Voltage, 48-Pin or 76-Pin VQFN, –40°C to +85°C (NiPdAu Lead Free), Tape & Reel
- c) SM803xxxUMY:
Flexible Ultra-Low Jitter Clock Synthesizer, 2.5/3.3V Voltage, 48-Pin or 76-Pin VQFN, –40°C to +85°C (Matte-Sn Lead Free), Tray

Note 1: Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.

SM803XXX

NOTES:

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
 - Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
 - Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
 - Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable" Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.
-

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at <https://www.microchip.com/en-us/support/design-help/client-support-services>.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Klear, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricon, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, TimeCesium, TimeHub, TimePictra, TimeProvider, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, Clockstudio, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, EyeOpen, GridTime, IdealBridge, IGaT, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, IntelliMOS, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, MarginLink, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, mSiC, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, Power MOS IV, Power MOS 7, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQL, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, Trusted Time, TSHARC, Turing, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2018 - 2024, Microchip Technology Incorporated and its subsidiaries.

All Rights Reserved.

ISBN: 978-1-6683-0494-5

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Australia - Sydney
Tel: 61-2-9868-6733

China - Beijing
Tel: 86-10-8569-7000

China - Chengdu
Tel: 86-28-8665-5511

China - Chongqing
Tel: 86-23-8980-9588

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115

China - Hong Kong SAR
Tel: 852-2943-5100

China - Nanjing
Tel: 86-25-8473-2460

China - Qingdao
Tel: 86-532-8502-7355

China - Shanghai
Tel: 86-21-3326-8000

China - Shenyang
Tel: 86-24-2334-2829

China - Shenzhen
Tel: 86-755-8864-2200

China - Suzhou
Tel: 86-186-6233-1526

China - Wuhan
Tel: 86-27-5980-5300

China - Xian
Tel: 86-29-8833-7252

China - Xiamen
Tel: 86-592-2388138

China - Zhuhai
Tel: 86-756-3210040

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444

India - New Delhi
Tel: 91-11-4160-8631

India - Pune
Tel: 91-20-4121-0141

Japan - Osaka
Tel: 81-6-6152-7160

Japan - Tokyo
Tel: 81-3-6880-3770

Korea - Daegu
Tel: 82-53-744-4301

Korea - Seoul
Tel: 82-2-554-7200

Malaysia - Kuala Lumpur
Tel: 60-3-7651-7906

Malaysia - Penang
Tel: 60-4-227-8870

Philippines - Manila
Tel: 63-2-634-9065

Singapore
Tel: 65-6334-8870

Taiwan - Hsin Chu
Tel: 886-3-577-8366

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600

Thailand - Bangkok
Tel: 66-2-694-1351

Vietnam - Ho Chi Minh
Tel: 84-28-5448-2100

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4485-5910
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-72400

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Hod Hasharon
Tel: 972-9-775-5100

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7288-4388

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820