

Precision Miniature Isolation Amplifier

FODC790, FODC79A, FODC79B

Description

The FODC79x devices are optically-coupled, high-precision, analog isolation amplifiers. Their input is a GaAlAs light-emitting-diode and a high-accuracy sigma-delta A/D converter. A high-accuracy D/A converter is situated at the differential output of these devices. They are well suited for current sensing applications including motor drives and inverters. In these applications the FODC79x devices will sense an analog voltage drop across an external sensing resistor and produce a differential output voltage that is proportional to the current sensed. The isolation allows for a smoother control in a high noise environment found in motor control systems.

Features

- 0.4 mV Input Offset Voltage
- 200 kHz Bandwidth
- 0.05% Nonlinearity
- 0.0012 V/V/°C Gain Drift Vs. Temperature
- 15 kV/μs Min. Common Mode Rejection (CMR) at $V_{CM} = 1000$ V
- Advanced Sigma-Delta (Σ - Δ) A/D Converter Technology
- Fully Differential Circuit Topology
- Operation Temperature: -40 °C to 105 °C

Applications

- General Purpose Analog Signal Isolation
- General Purpose Current and Voltage Sensing and Monitoring
- Switched Mode Power Supply Signal Isolation
- Inverter Current Sensing
- Industrial Process Control


Safety Mechanisms

- UL/cUL Recognized 5000 V_{RMS} for 1 Minute
- IEC/EN/DIN EN 60747-5-5 $V_{IORM} = 1414 V_{peak}$




SOIC/LSOP-8
CASE 751FC

MARKING DIAGRAM



C79 = Device Number
x = Gain Rank: 0, A or B
V = DIN_EN/IEC60747-5-5 Option
(only appears on component ordered with this option)
XX = Two Digit Year Code
YY = Two Digit Work Code
R = Assembly Package Code
S = Surface Mount Device
D = Through-Hole Device

BLOCK DIAGRAM

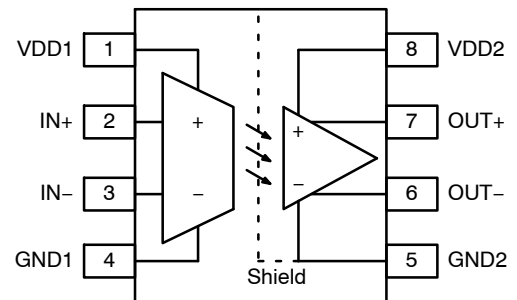

ORDERING INFORMATION

See detailed ordering and shipping information on page 8 of this data sheet.

FODC790, FODC79A, FODC79B

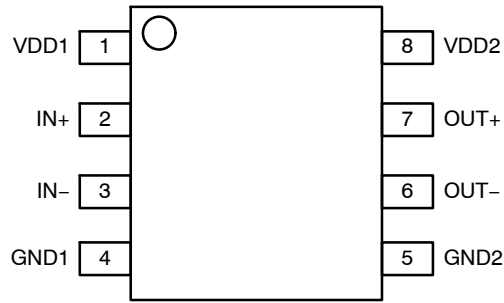


Figure 1. Pin Definitions

PIN DESCRIPTION

Pin No.	Name	Description
1	VDD1	Power Supply for Signal Input (analog side)
2	VIN+	Positive Analog Input, ± 200 mV recommended input range.
3	VIN-	Negative Analog Input, ± 200 mV recommended input range (Typically connected to GND1)
4	GND1	Ground Reference for Signal Input (analog side)
5	GND2	Ground Reference for Data Output (digital side)
6	VOU-	Negative Output
7	VOU+	Positive Output
8	VDD2	Power Supply for Data Output (digital side)

SAFETY AND INSULATION RATINGS (This device is suitable for “safe electrical insulation” only within the safety limit data. Compliance with the safety ratings must be ensured by means of protective circuits.)

Symbol	Rating	Min	Typ	Max	Unit
	Installation Classifications per DIN VDE 0110, Table 1	<150 V _{rms}	I to IV		
		<300 V _{rms}	I to IV		
		<450 V _{rms}	I to III		
	Material Group (DIN VDE 0110, 1.89, Table 1)		IIIa		
	Climatic Classification		40/105/21		
	Pollution Degree per DIN VDE 0110/39		2		
V _{IORM}	Maximum Working Insulation Voltage	1414			V _{PEAK}
V _{IOTM}	Highest Allowable Over Voltage (60 Seconds)	8000			V _{PEAK}
CTI	Comparative Tracking Index (DIN IEC 112/VDE 0303 Part 1)	300			V
ECR	External Creepage	8			mm
E _{CL}	External Clearance	8			mm
DTI	Insulation Thickness	0.4			μm
T _S	Maximum Values in Failure; Case Temperature			175	°C
I _{S, INPUT}	Safety Input Current			230	mA
P _{S, OUTPUT}	Maximum Values in Failure; Output Power			600	mW
R _{IO}	Insulation Resistance T _A = T _S , V _{IO} = 500 V	10 ⁹			Ω

FODC790, FODC79A, FODC79B

INSULATION CHARACTERISTICS (Apply over all recommended conditions. All typical values are measured at $T_A = 25^\circ\text{C}$.)

Symbol	Rating	Test Conditions	Min	Typ	Max	Unit
V_{ISO}	Insulation Voltage per UL1577	$RH \leq 40\text{--}60\%$, $t = 60\text{ s}$ (Note 1)	5000			V_{RMS}
R_{ISO}	Insulation Resistance	$T_A = 25^\circ\text{C}$, $V_{IO} = 500\text{ V}$		10^{12}		Ω
C_{ISO}	Insulation Capacitance	$T_A = 25^\circ\text{C}$, $f = 1\text{ MHz}$		0.5		pF

1. Device is considered a two-terminal device: pins 1, 2, 3, and 4 are shorted and pins 5, 6, 7, and 8 are shorted. Each photocoupler is tested by applying an insulation test voltage 6000 V_{RMS} for one second.

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Rating	Value	Unit
V_{DD1} , V_{DD2}	Supply Voltage	0 to 5.5	V
V_{IN+} , V_{IN-}	Steady State Input Voltage Range 2 Second Transient	-2.0 to $V_{DD1} + 0.5$ -6.0 to $V_{DD1} + 0.5$	V
V_{OUT+} , V_{OUT-}	Output Voltage Range	-0.5 to $V_{DD2} + 0.5$	V
$T_{J(max)}$	Maximum Junction Temperature	125	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 125	$^\circ\text{C}$
T_{SLD}	Lead Temperature Soldering	260	$^\circ\text{C}$

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

RECOMMENDED OPERATING RANGES

Symbol	Rating	Min	Max	Unit
T_A	Ambient Operating Temperature	-40	105	$^\circ\text{C}$
V_{DD1}	V_{DD1} Supply Voltage	4.5	5.5	V
V_{DD2}	V_{DD2} Supply Voltage	3.0	5.5	V
V_{IN+} , V_{IN-}	Input Voltage (Accurate and Linear)	-200	200	mV

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

DC ELECTRICAL CHARACTERISTICS (Typical values at $V_{IN+} = V_{IN-} = 0\text{ V}$, $V_{DD1} = 5\text{ V}$, $V_{DD2} = 3.3\text{ V}$, $T_A = 25^\circ\text{C}$ unless otherwise noted. Minimum and maximum specifications are at recommended operating conditions.)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V_{OS}	Input Offset Voltage	$T_A = 25^\circ\text{C}$	-1	0.4	2	mV
$\Delta V_{OS}/\Delta T_A$	Magnitude of Input Offset Change vs. Temperature	$T_A = -40^\circ\text{C}$ to 105°C		-0.8	4.1	$\mu\text{V}/^\circ\text{C}$
G_0	Gain (FODC790 $\pm 3\%$)	$T_A = 25^\circ\text{C}$	7.95	8.2	8.44	V/V
G_1	Gain (FODC79A $\pm 1\%$)	$T_A = 25^\circ\text{C}$	8.12	8.2	8.28	V/V
G_2	Gain (FODC79B $\pm 0.5\%$)	$T_A = 25^\circ\text{C}$	8.16	8.2	8.24	V/V
$\Delta G/\Delta T_A$	Magnitude of Gain Change vs. Temperature	$T_A = -40^\circ\text{C}$ to 105°C		-1.2		$\text{nV}/^\circ\text{C}$
NL_{200}	Nonlinearity over $\pm 200\text{ mV}$ Input Voltage	$V_{IN+} = -200\text{ mV}$ to $+200\text{ mV}$, $T_A = 25^\circ\text{C}$		0.05	0.13	%
$\Delta NL_{200}/\Delta T_A$	Magnitude of NL_{200} Change vs. Temperature	$T_A = -40^\circ\text{C}$ to 105°C		0.0001		$\%/^\circ\text{C}$
NL_{100}	Nonlinearity over $\pm 100\text{ mV}$	$V_{IN+} = -100\text{ mV}$ to $+100\text{ mV}$		0.03	0.06	%

FODC790, FODC79A, FODC79B

AC ELECTRICAL CHARACTERISTICS (Typical values at $V_{IN+} = V_{IN-} = 0\text{ V}$, $V_{DD1} = 5\text{ V}$, $V_{DD2} = 3.3\text{ V}$, $T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted. Minimum and maximum specifications are at recommended operating conditions.)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
SNR	Signal-to-Noise Ratio	$V_{IN+} = 300\text{ mV}_{pk-pk}$, 10 kHz sine wave		59		dB
SND	Signal-to-Noise and Distortion Ratio	$V_{IN+} = 300\text{ mV}_{pk-pk}$, 10 kHz sine wave		58		dB
BW	V_{OUT} Bandwidth (–3 dB)	$V_{IN+} = 300\text{ mV}_{pk-pk}$, sine wave	140	200		kHz
t_{pd10}	V_{IN} to V_{OUT} Signal Delay (50% to 10%)	$V_{IN+} = 0\text{ mV}$ to 200 mV step. Measured at output of OPA132		1.4	2.3	μs
t_{pd50}	V_{IN} to V_{OUT} Signal Delay (50% to 50%)			2.0	2.6	μs
t_{pd90}	V_{IN} to V_{OUT} Signal Delay (50% to 90%)			3.1	3.3	μs
$t_{R/F}$	V_{OUT} Rise/Fall Time (10% to 90%)			2.0		μs
CMTI	Common Mode Transient Immunity	$T_A = 25\text{ }^{\circ}\text{C}$, $V_{CM} = 1000\text{ V}$	15			kV/ μs
PSR	Power Supply Rejection	1 V_{pp} 1 kHz sine wave ripples on V_{DD1} , differential output		–75		dB

INPUT/OUTPUT CHARACTERISTICS (Typical values at $V_{IN+} = V_{IN-} = 0\text{ V}$, $V_{DD1} = 5\text{ V}$, $V_{DD2} = 3.3\text{ V}$, $T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted. Minimum and maximum specifications are at recommended operating conditions.)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
FSR	Full Scale Differential Voltage Input Range	$V_{IN} = V_{IN+} - V_{IN-}$		± 300		mV
I_{IN+}	Input Current	$V_{IN+} = V_{IN-} = 0\text{ V}$	–1	–0.1		μA
$\Delta I_{IN+}/\Delta T_A$	Magnitude of I_{IN+} Change vs. Temperature			–0.23		nA/ $^{\circ}\text{C}$
I_{DD1}	Input Supply Current	$V_{IN+} = +400\text{ mV}$		9.1	18.5	mA
R_{IN}	Input Impedance	V_{IN+} or V_{IN-} , Single-Ended		25		k Ω
C_{IN}	Input Capacitance			30		pF
V_{OCM}	Output Common Mode Voltage	V_{OUT+} or V_{OUT-}		1.23		V
OVR	Output Voltage Range	V_{OUT+} or V_{OUT-}		0 to 2.5		V
$ I_{OSC} $	Output Short-Circuit Current	V_{OUT+} or V_{OUT-} , Shorted to GND2 or V_{DD2}		12		mA
I_{DD2}	Output Supply Current	$V_{DD2} = 5\text{ V}$		4.6	12	mA
		$V_{DD2} = 3.3\text{ V}$		3.2	11	mA
R_{OUT}	Output Impedance	V_{OUT+} or V_{OUT-}		52		Ω
CMRR _{IN}	Input DC Common Mode Rejection Ratio			75		dB



FODC790, FODC79A, FODC79B

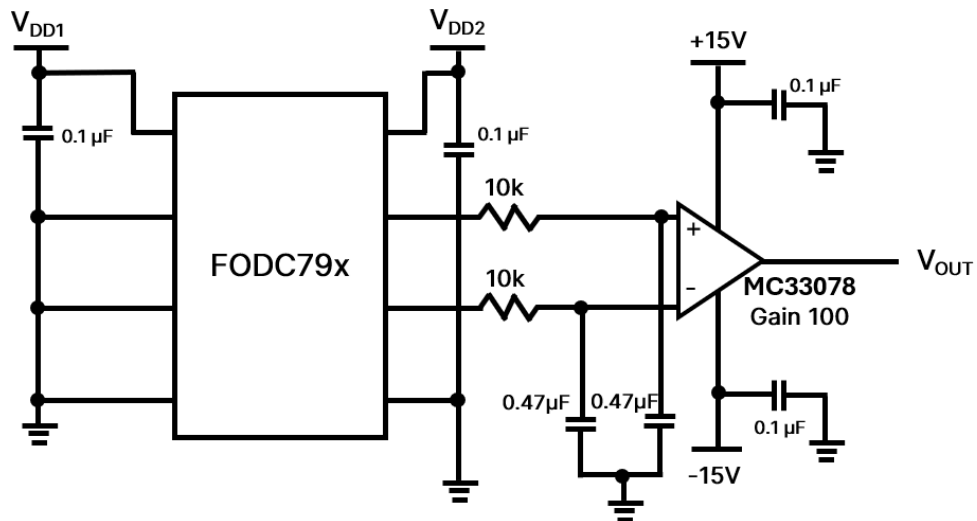


Figure 2. Input Voltage Test Circuit

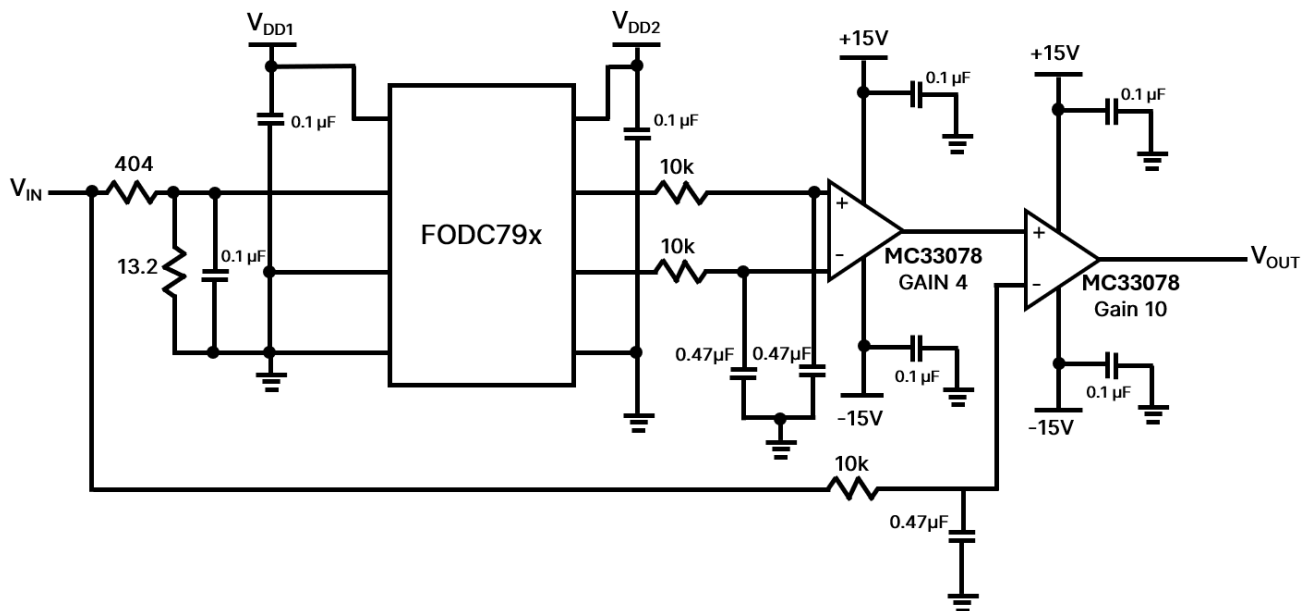


Figure 3. Gain and Nonlinearity Test Circuit

FODC790, FODC79A, FODC79B

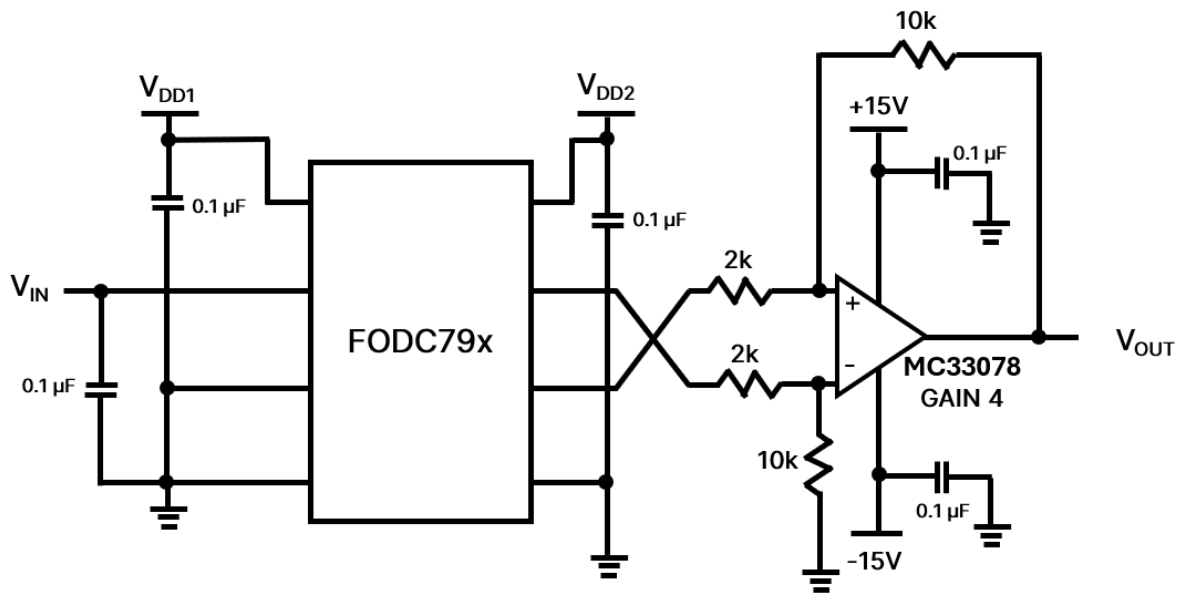


Figure 4. Propagation Delay Test Circuit

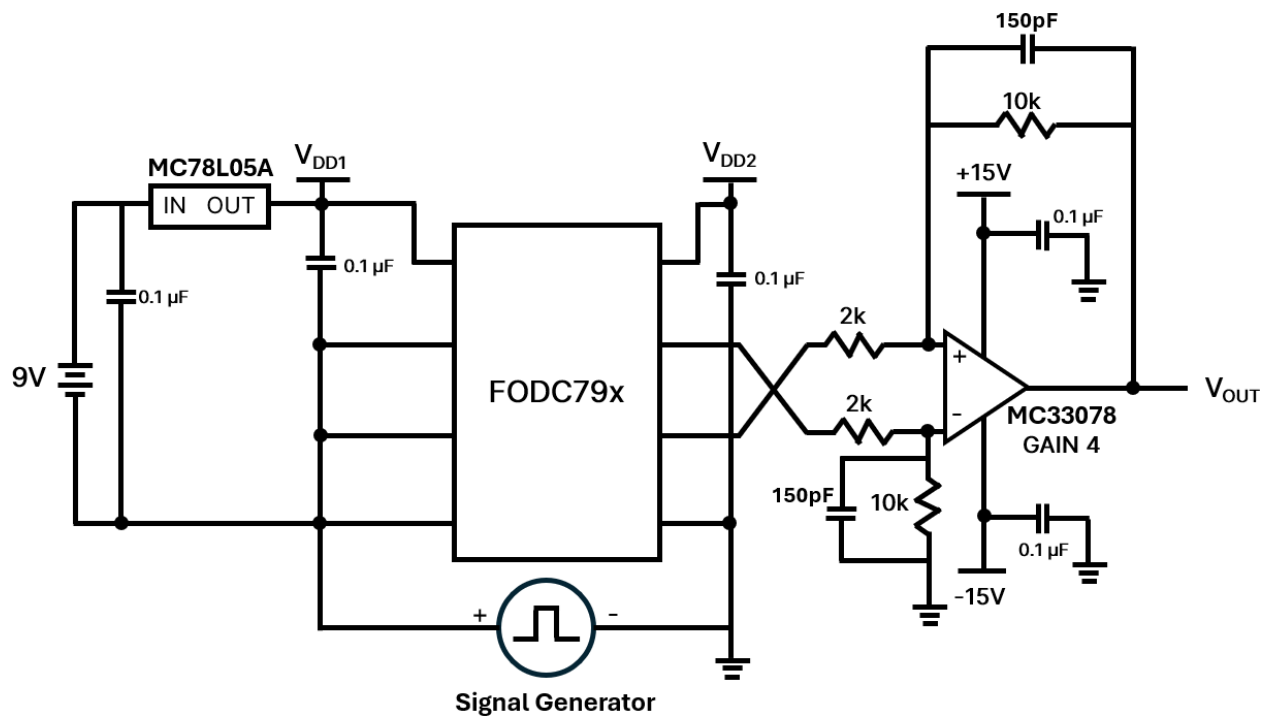


Figure 5. CMTI Test Circuit

FODC790, FODC79A, FODC79B

APPLICATION INFORMATION

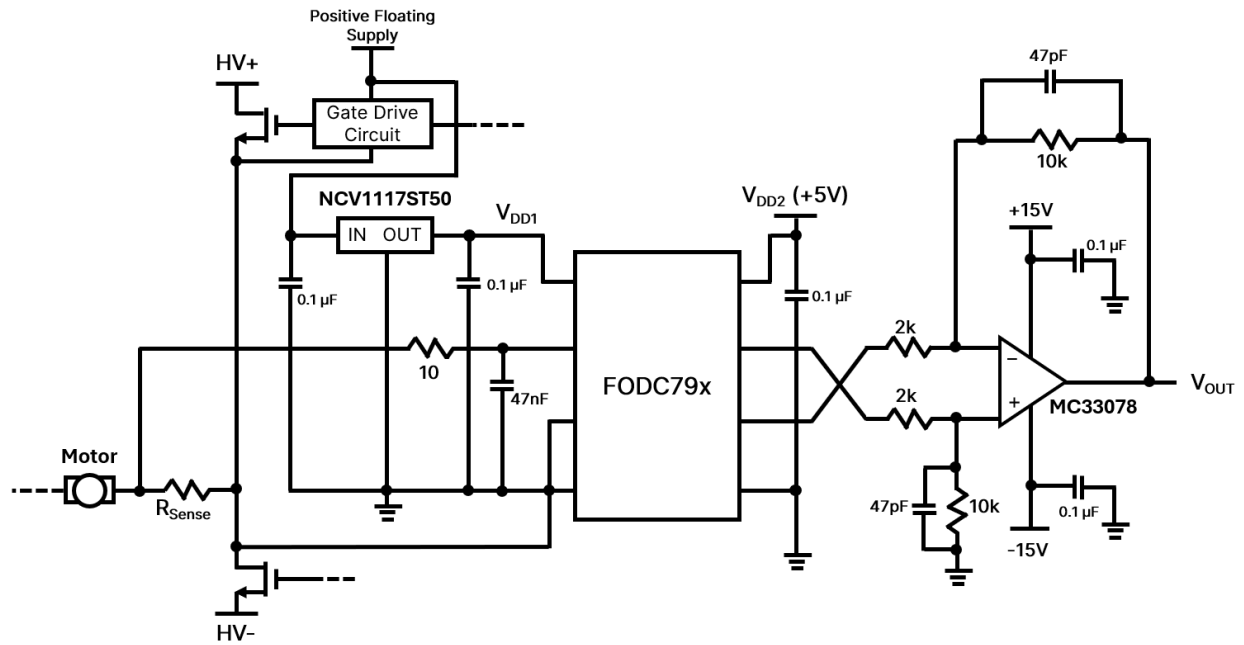


Figure 6. Application Schematic: Motor Drive

FODC790, FODC79A, FODC79B

ORDERING INFORMATION

Part Number	CTR Gain Rank*	Isolation Rating (kV)	Comment	Package Type	Shipping†
FODC790R2	0	5	Pin 1 location at upper left of tape	LSOP8 (Pb-Free)	TBD
FODC790R2V	0	5	VDE approved option	LSOP8 (Pb-Free)	TBD
FODC79AR2	A	5	Pin 1 location at upper left of tape	LSOP8 (Pb-Free)	TBD
FODC79AR2V	A	5	VDE approved option	LSOP8 (Pb-Free)	TBD
FODC79BR2	B	5	Pin 1 location at upper left of tape	LSOP8 (Pb-Free)	TBD
FODC79BR2V	B	5	VDE approved option	LSOP8 (Pb-Free)	TBD

* Please refer to the DC ELECTRICAL CHARACTERISTICS table.

† For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, [BRD8011/D](#).




FODC790, FODC79A, FODC79B

REVISION HISTORY





Revision	Description of Changes	Date
0	Initial datasheet release.	4/27/2026





SOIC/LSOP-8 5.84x6.80x3.18, 1.27P
CASE 751FC
ISSUE O

DATE 02 FEB 2026

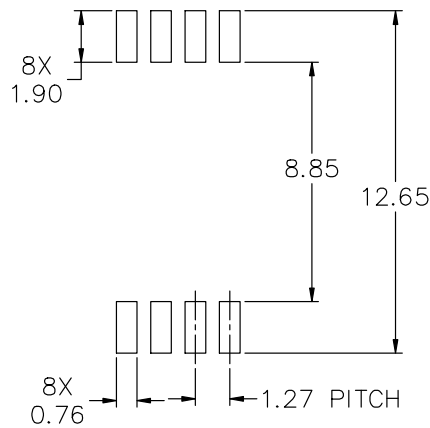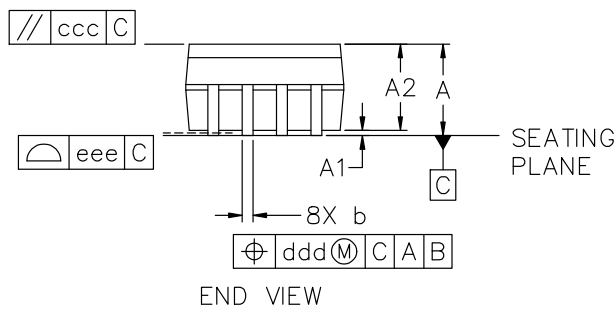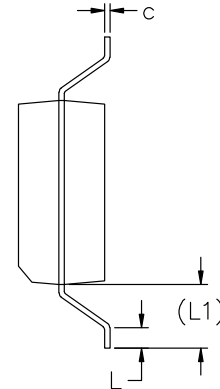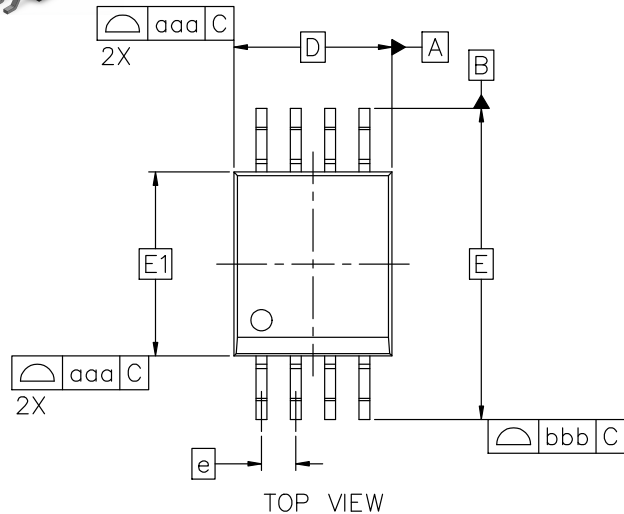

*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

MILLIMETERS			
DIM	MIN	NOM	MAX
A	3.18	3.38	3.58
A1	0.10	0.20	0.30
A2	3.08	3.18	3.28
b	0.30	0.40	0.50
c	0.20	0.25	0.30
D	5.84 BSC		
E	11.50 BSC		
E1	6.80 BSC		
e	1.27 BSC		
L	0.50	0.75	1.00
L1	2.35 REF		
POSITION FORM & TOLERANCE			
aaa	0.20		
bbb	0.25		
ccc	0.10		
ddd	0.25		
eee	0.10		

NOTES:

1. DIMENSIONING AND TOLERANCING AS PER ASME Y14.5M, 2018.
2. CONTROLLING DIMENSION: MILLIMETERS.

DOCUMENT NUMBER:	98AON73214H	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	SOIC/LSOP-8 5.84x6.80x3.18, 1.27P	PAGE 1 OF 1

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales