LM4755 Stereo 11W Audio Power Amplifier with Mute

Check for Samples: LM4755

FEATURES

- **Drives 4Ω and 8Ω Loads**
- **Integrated Mute Function**
- **Internal Gain Resistors**
- **Minimal External Components Needed**
- **Single Supply Operation**
- **Internal Current Limiting and Thermal Protection**
- **Compact 9-lead TO-220 Package**
- **Wide Supply Range 9V - 40V**

APPLICATIONS

- **Stereos TVs**
- **Compact Stereos**
- **Mini Component Stereos**

KEY SPECIFICATIONS

- **Output Power at 10% THD with 1kHz into 4Ω at V_{CC} = 24V 11 W (typ)**
- **Output Power at 10% THD with 1kHz into 8Ω at V_{CC} = 24V 7 W (typ)**
- **Closed Loop Gain 34 dB (typ)**
- **P_O at 10% THD+N @ 1kHz into 4Ω Single-Ended DDPAK Package at V_{CC}=12V 2.5 W (typ)**
- **P_O at 10% THD+N @ 1kHz into 8Ω Bridged DDPAK Package at V_{CC}=12V 5 W (typ)**

DESCRIPTION

The LM4755 is a stereo audio amplifier capable of delivering 11W per channel of continuous average output power to a 4Ω load or 7W per channel into 8Ω using a single 24V supply at 10% THD+N. The internal mute circuit and pre-set gain resistors provide for a very economical design solution.

Output power specifications at both 20V and 24V supplies and low external component count offer high value to consumer electronic manufacturers for stereo TV and compact stereo applications. The LM4755 is specifically designed for single supply operation.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1999–2013, Texas Instruments Incorporated

TYPICAL APPLICATION

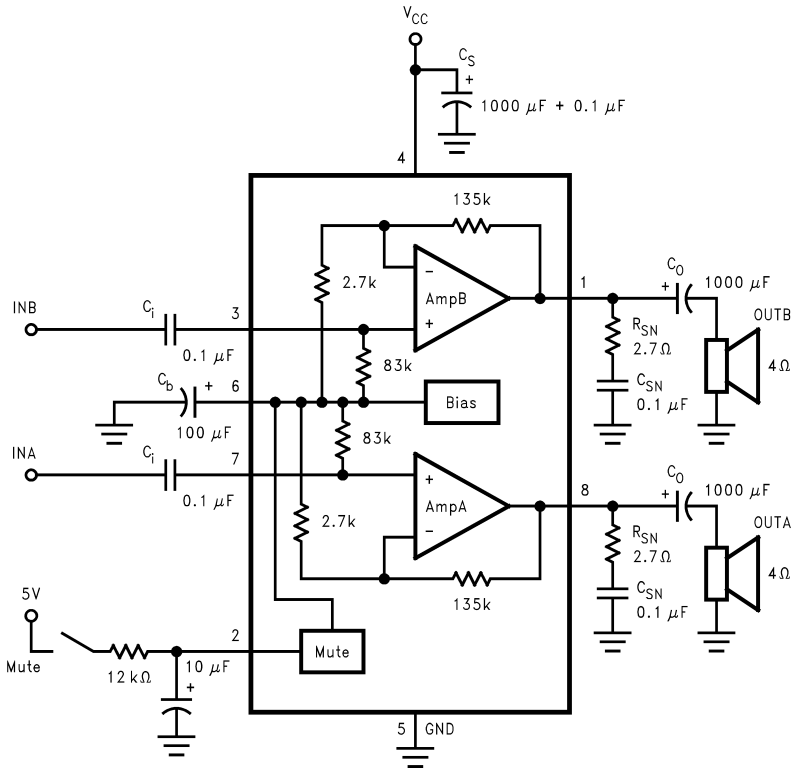

Figure 1. Typical Audio Amplifier Application Circuit

Connection Diagram

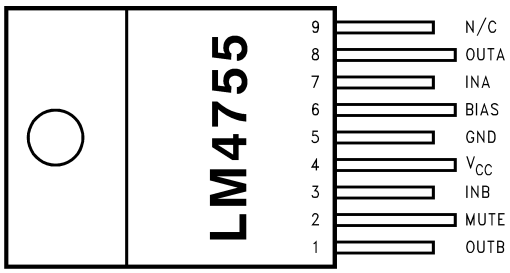

9 Pin TO-220
Plastic Package (Top View)
See Package Number NEC

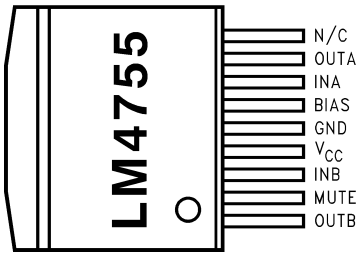

9 Pin DDPAK
Plastic Package (Top View)
See Package Number KTW

Copyright © 1999–2013, Texas Instruments Incorporated

These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

ABSOLUTE MAXIMUM RATINGS[1][2][3][4]

Supply Voltage		40V
Input Voltage		±0.7V
Input Voltage at Output Pins [5]		GND -0.4V
Output Current		Internally Limited
Power Dissipation [6]		62.5W
ESD Susceptibility [7]		2 kV
Junction Temperature		150°C
Soldering Information	NEC Package (10 seconds)	250°C
Storage Temperature		−40°C to 150°C

(1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not ensure specific performance limits. Electrical Characteristics state DC and AC electrical specifications under particular test conditions which ensure specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not ensured for parameters where no limit is given, however, the typical value is a good indication of device performance.
(2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/Distributors for availability and specifications.
(3) The TO-263 Package is not recommended for V_S > 16V due to impractical heatsinking limitations.
(4) All voltages are measured with respect to the GND pin (5), unless otherwse specified.
(5) The outputs of the LM4755 cannot be driven externally in any mode with a voltage lower than -0.4V below GND or permanent damage to the LM4755 will result.
(6) For operating at case temperatures above 25°C, the device must be derated based on a 150°C maximum junction temperature and a thermal resistance of θ_{JC} = 2°C/W (junction to case). Refer to the section DETERMINING MAXIMUM POWER DISSIPATION in the APPLICATION INFORMATION section for more information.
(7) Human body model, 100 pF discharged through a 1.5 kΩ resistor.

OPERATING RATINGS

Temperature Range $T_{MIN} \le T_A \le T_{MAX}$	$-40°C \le T_A \le +85°C$
Supply Voltage	9V to 32V
θ_{JC}	2°C/W
θ_{JA}	76°C/W

ELECTRICAL CHARACTERISTICS

The following specifications apply to each channel with V_{CC} = 24V, T_A = 25°C unless otherwise specified.

Symbol	Parameter	Conditions	LM4755		Units (Limits)
			Typical[1]	Limit	
I_{TOTAL}	Total Quiescent Power Supply Current	Mute Off	10	15	mA(max)
				7	mA(min)
		Mute On	7		mA
P_O	Output Power (Continuous Average per Channel)	f = 1 kHz, THD+N = 10%, R_L = 8Ω	7		W
		f = 1 kHz, THD+N = 10%, R_L = 4Ω	11	10	W(min)
		V_S = 20V, R_L = 8Ω	4		W
		V_S = 20V, R_L = 4Ω	7		W
		f = 1 kHz, THD+N = 10%, R_L = 4Ω V_S = 12V, DDPAK Pkg.	2.5		W
THD	Total Harmonic Distortion	f = 1 kHz, P_O = 1 W/ch, R_L = 8Ω	0.08		%
V_{OSW}	Output Swing	P_O = 10W, R_L = 8Ω	15		V
		P_O = 10W, R_L = 4Ω	14		V
X_{TALK}	Channel Separation	See Apps. Circuit (Figure 1)	55		dB
		f = 1 kHz, V_O = 4 Vrms			

(1) Typicals are measured at 25°C and represent the parametric norm.

Copyright © 1999–2013, Texas Instruments Incorporated

ELECTRICAL CHARACTERISTICS (continued)

The following specifications apply to each channel with V_{CC} = 24V, T_A = 25°C unless otherwise specified.

Symbol	Parameter	Conditions	LM4755		Units (Limits)
			Typical (1)	Limit	
PSRR	Power Supply Rejection Ratio	See Apps. Circuit (Figure 1) f = 120 Hz, V_O = 1 mVrms	50		dB
V_{ODV}	Differential DC Output Offset Voltage	V_{IN} = 0V	0.09	0.4	V(max)
SR	Slew Rate		2		V/µs
R_{IN}	Input Impedance		83		kΩ
PBW	Power Bandwidth	3 dB BW at P_O = 2.5W, R_L = 8Ω	65		kHz
A_{VCL}	Closed Loop Gain (Internally Set)	R_L = 8Ω	34	33 35	dB(min) dB(max)
ε_{IN}	Noise	IHF-A Weighting Filter, R_L = 8Ω Output Referred	0.2		mVrms
I_O	Output Short Circuit Limit	V_{IN} = 0.5V, R_L = 2Ω		2	A(min)
Mute Pin V_{IL}	Mute Low Input Voltage	Not in Mute Mode		0.8	V(max)
V_{IH}	Mute High Input Voltage	In Mute Mode	2.0	2.5	V(min)
A_M	Mute Attenuation	V_{MUTE} = 5.0V	80		dB

EQUIVALENT SCHEMATIC

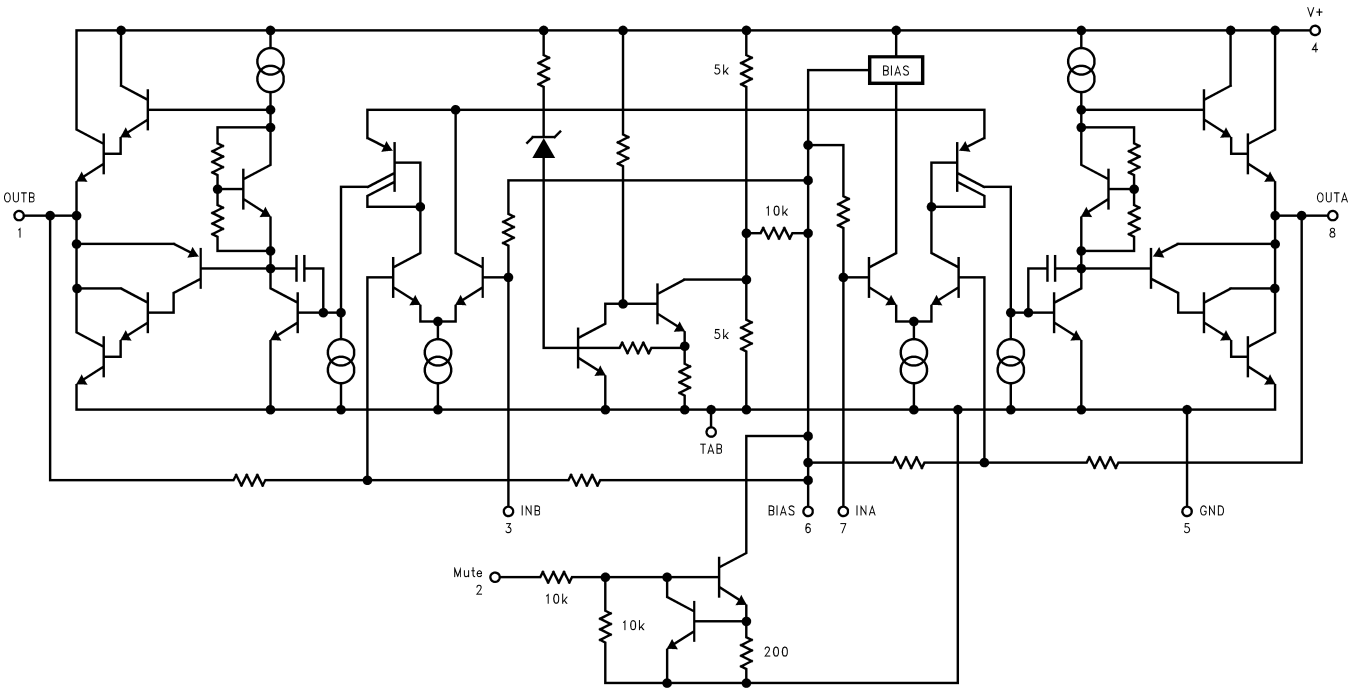

Figure 2.

Copyright © 1999–2013, Texas Instruments Incorporated

TEST CIRCUIT

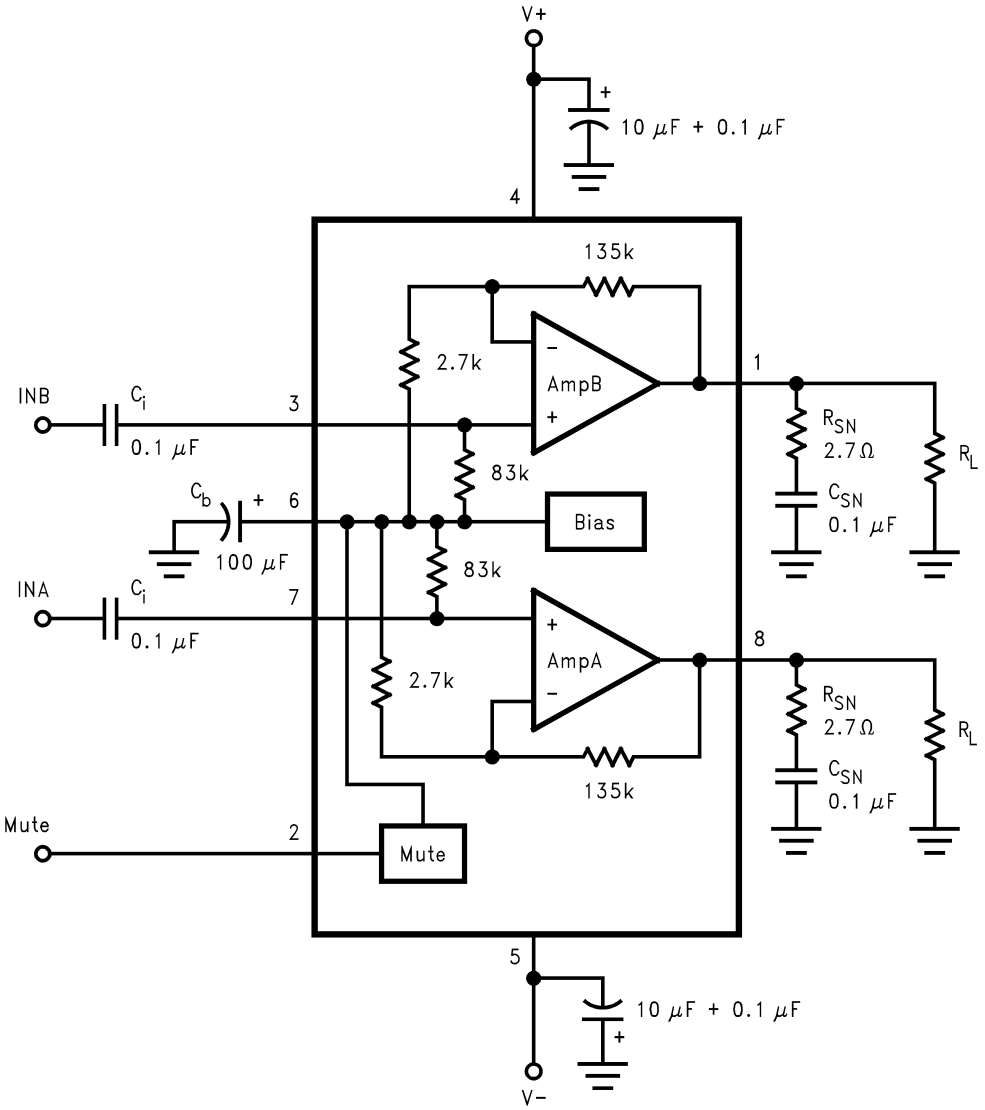

Figure 3. Test Circuit

SYSTEM APPLICATION CIRCUIT

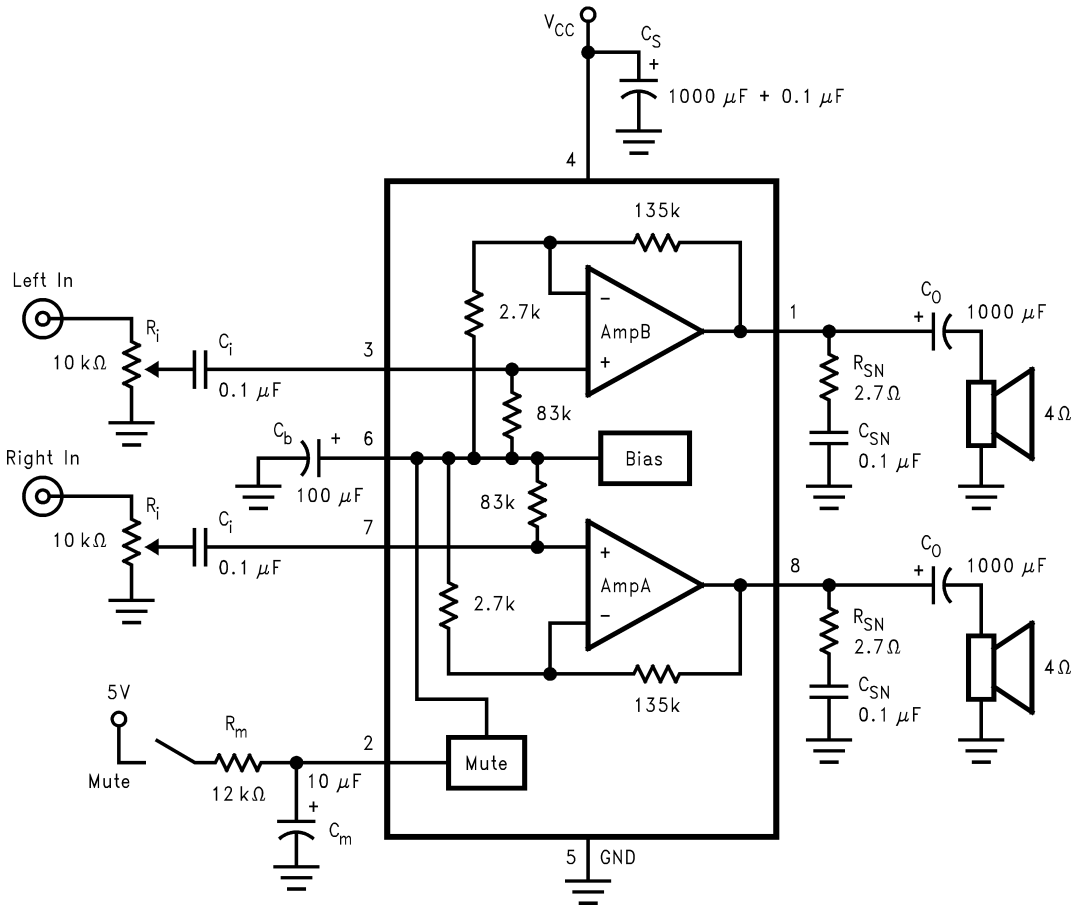

Figure 4. Circuit for External Components Description

EXTERNAL COMPONENTS DESCRIPTION

Components		Function Description
1, 2	C_S	Provides power supply filtering and bypassing.
3, 4	R_{SN}	Works with C_{SN} to stabilize the output stage from high frequency oscillations.
5, 6	C_{SN}	Works with R_{SN} to stabilize the output stage from high frequency oscillations.
7	C_b	Provides filtering for the internally generated half-supply bias generator.
8, 9	C_i	Input AC coupling capacitor which blocks DC voltage at the amplifier's input terminals. Also creates a high pass filter with fc=1/(2 • π • Rin • Cin).
10, 11	C_o	Output AC coupling capacitor which blocks DC voltage at the amplifier's output terminal. Creates a high pass filter with fc=1/(2 • π • Rout • Cout).
12, 13	R_i	Voltage control - limits the voltage level allowed to the amplifier's input terminals.
14	R_m	Works with C_m to provide mute function timing.
15	C_m	Works with R_m to provide mute function timing.

Copyright © 1999–2013, Texas Instruments Incorporated

TYPICAL PERFORMANCE CHARACTERISTICS

Typicals are measured at 25°C and represent the parametric norm.

THD+N vs Output Power

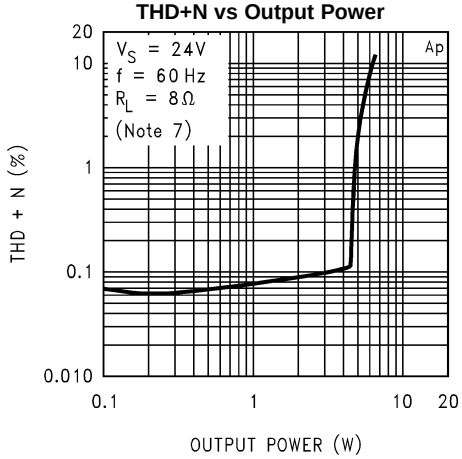

Figure 5.

THD+N vs Output Power

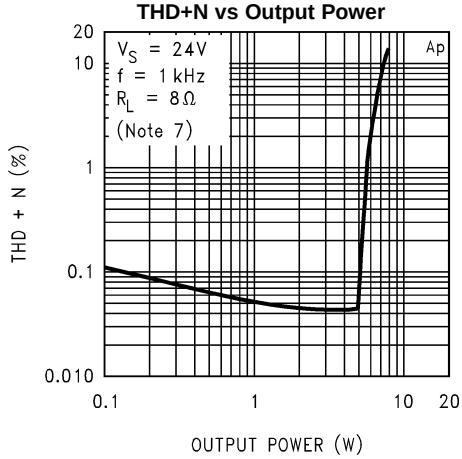

Figure 6.

THD+N vs Output Power

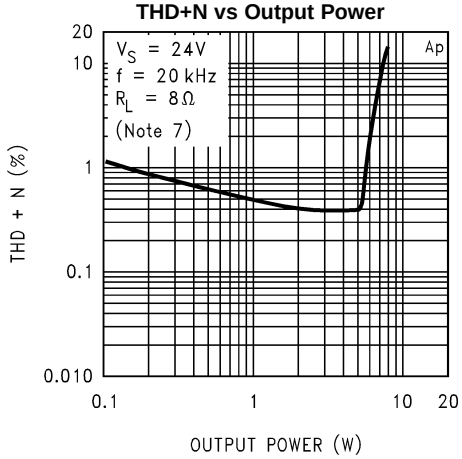

Figure 7.

THD+N vs Output Power

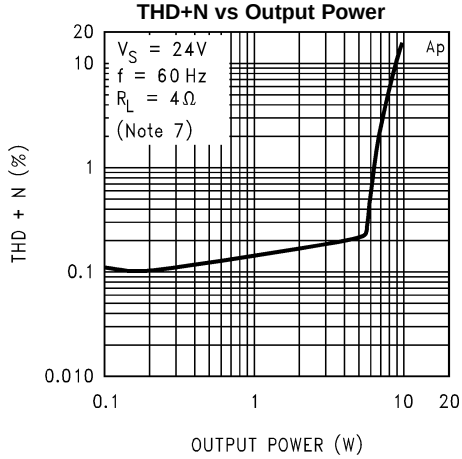

Figure 8.

THD+N vs Output Power

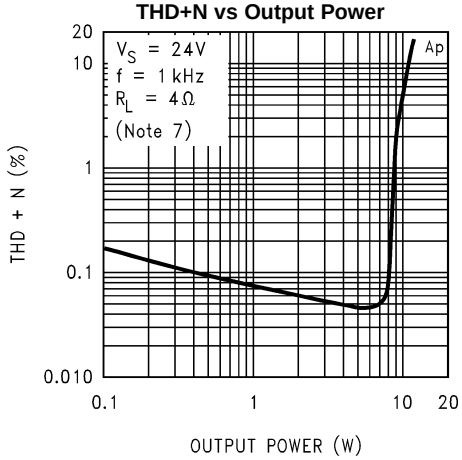

Figure 9.

THD+N vs Output Power

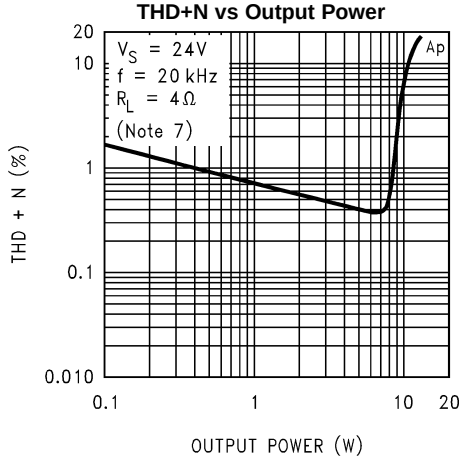

Figure 10.

Copyright © 1999–2013, Texas Instruments Incorporated

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Typicals are measured at 25°C and represent the parametric norm.

THD+N vs Output Power

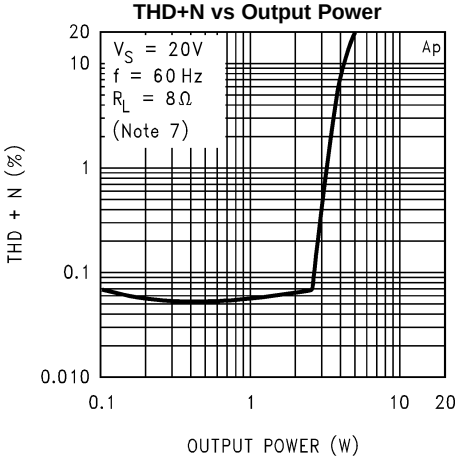

Figure 11.

THD+N vs Output Power

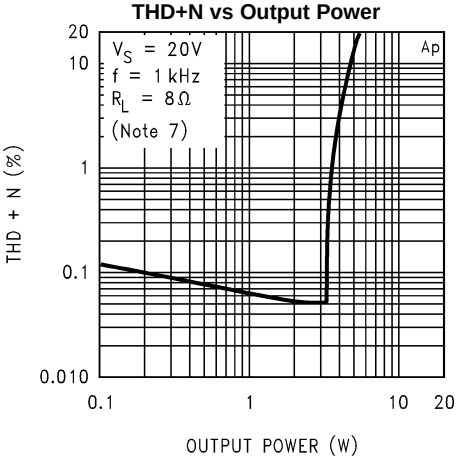

Figure 12.

THD+N vs Output Power

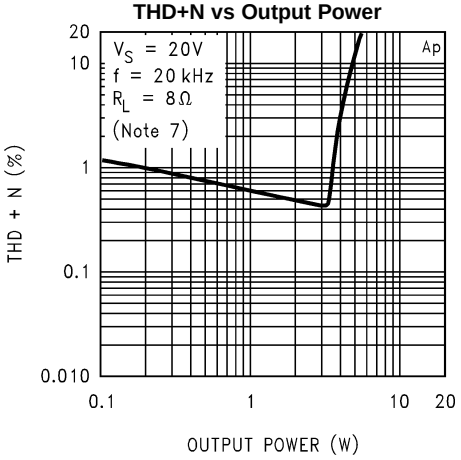

Figure 13.

THD+N vs Output Power

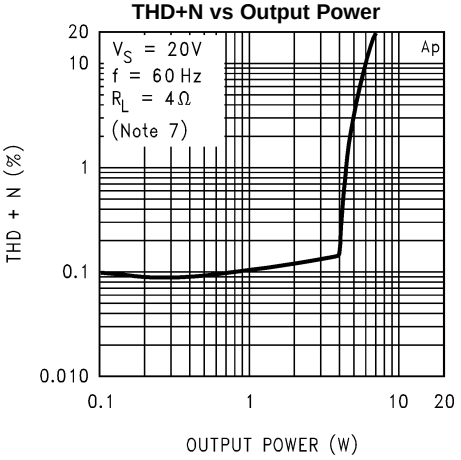

Figure 14.

THD+N vs Output Power

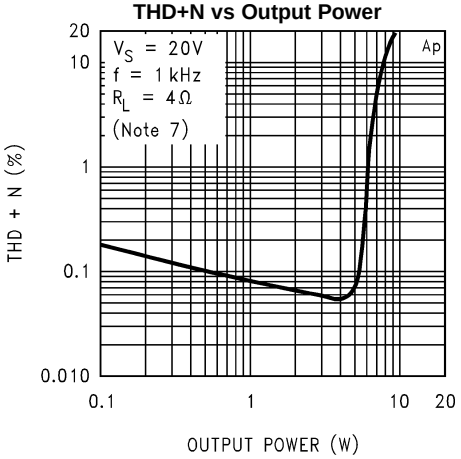

Figure 15.

THD+N vs Output Power

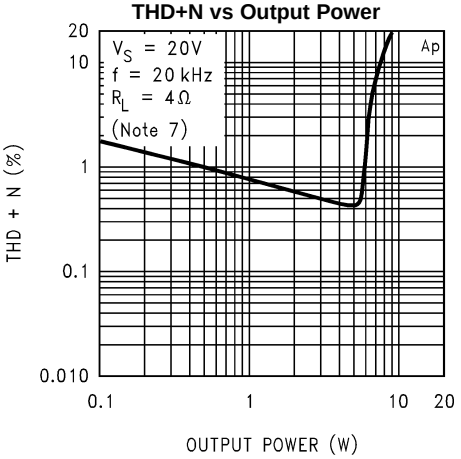

Figure 16.

Copyright © 1999–2013, Texas Instruments Incorporated

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Typicals are measured at 25°C and represent the parametric norm.

THD+N vs Output Power

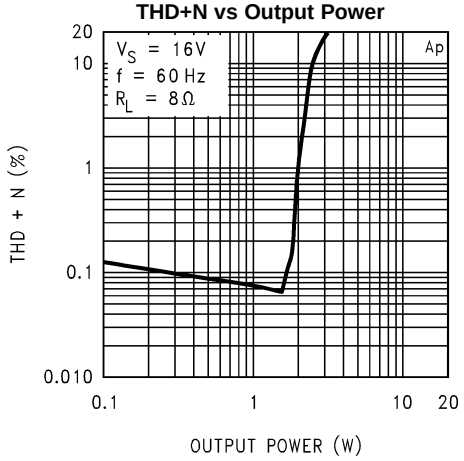

Figure 17.

THD+N vs Output Power

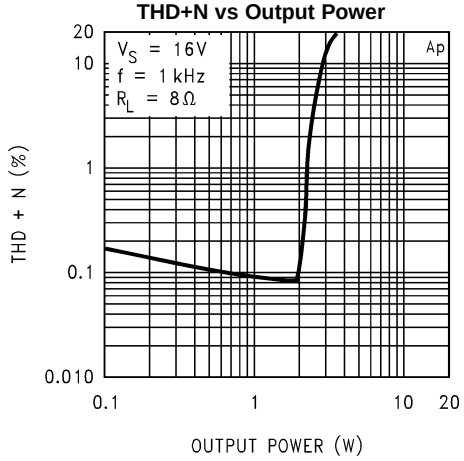

Figure 18.

THD+N vs Output Power

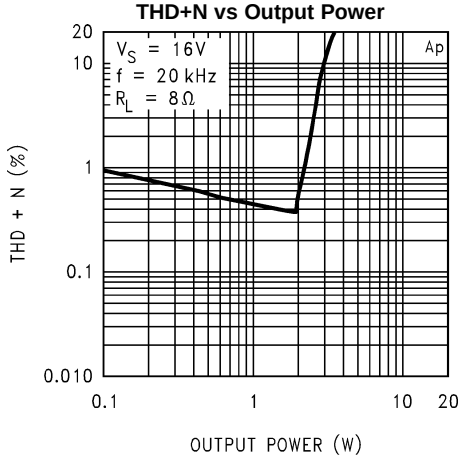

Figure 19.

THD+N vs Output Power

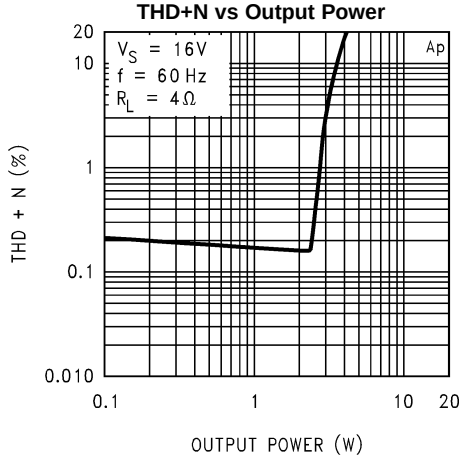

Figure 20.

THD+N vs Output Power

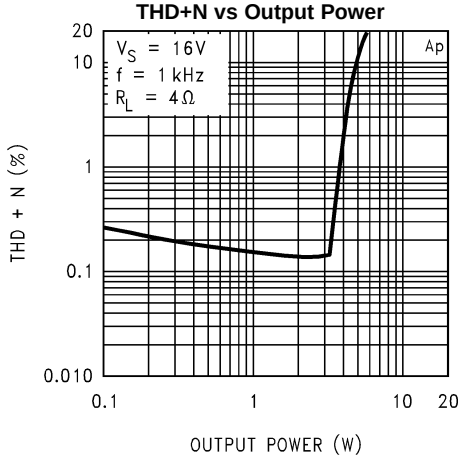

Figure 21.

THD+N vs Output Power

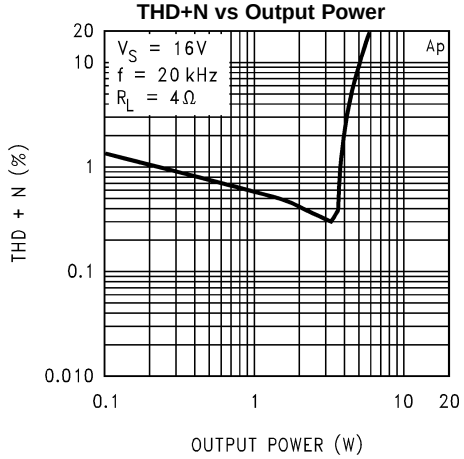

Figure 22.

Copyright © 1999–2013, Texas Instruments Incorporated

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Typicals are measured at 25°C and represent the parametric norm.

THD+N vs Output Power

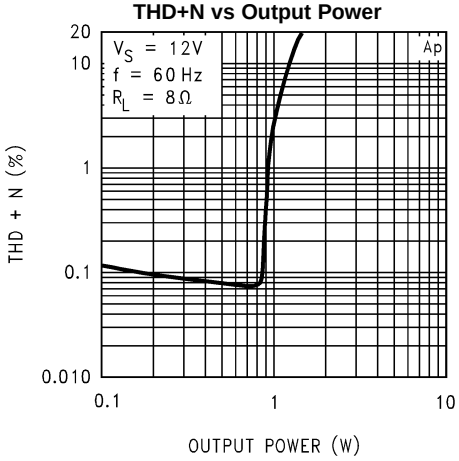

Figure 23.

THD+N vs Output Power

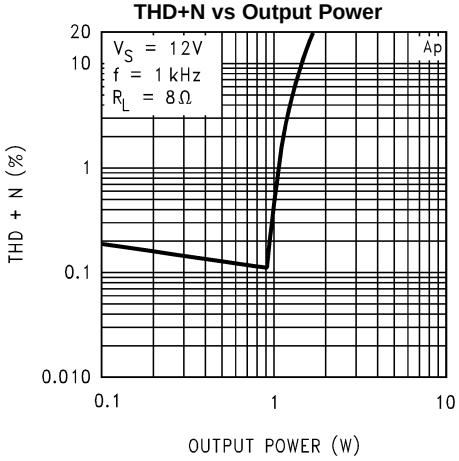

Figure 24.

THD+N vs Output Power

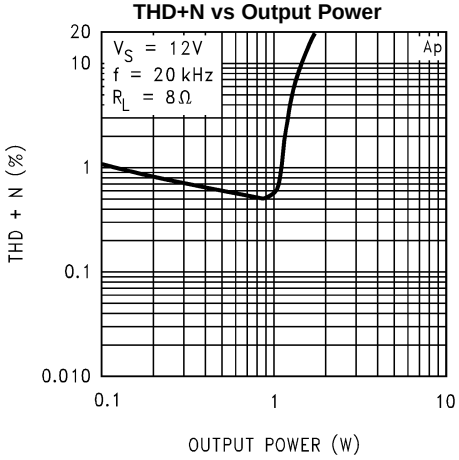

Figure 25.

THD+N vs Output Power

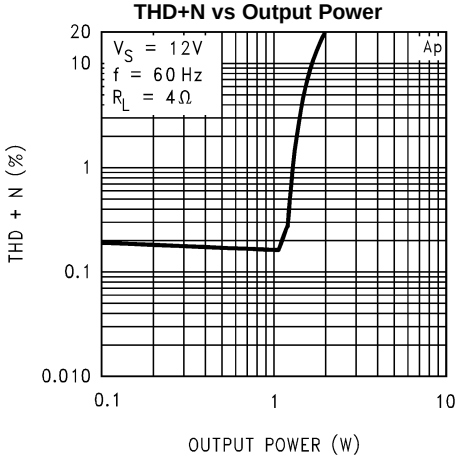

Figure 26.

THD+N vs Output Power

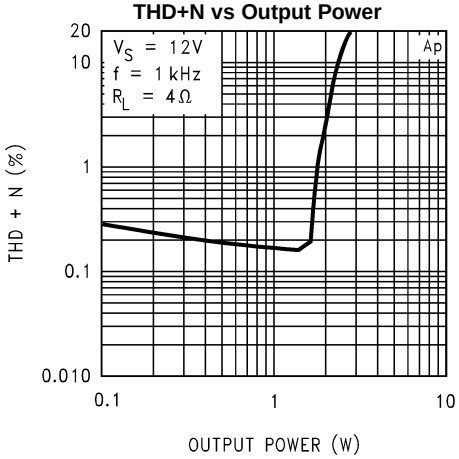

Figure 27.

THD+N vs Output Power

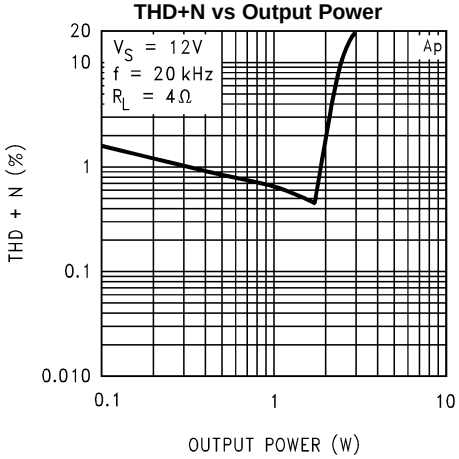

Figure 28.

Copyright © 1999–2013, Texas Instruments Incorporated

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Typicals are measured at 25°C and represent the parametric norm.

Output Power vs Supply Voltage

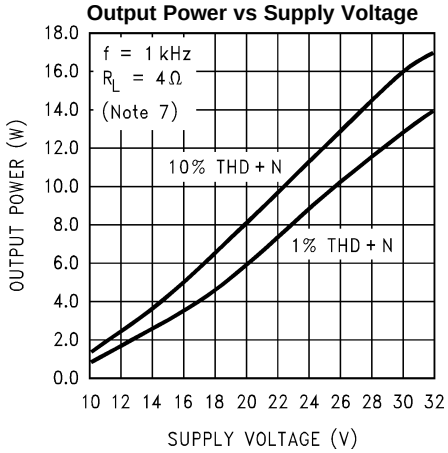

Figure 29.

Output Power vs Supply Voltage

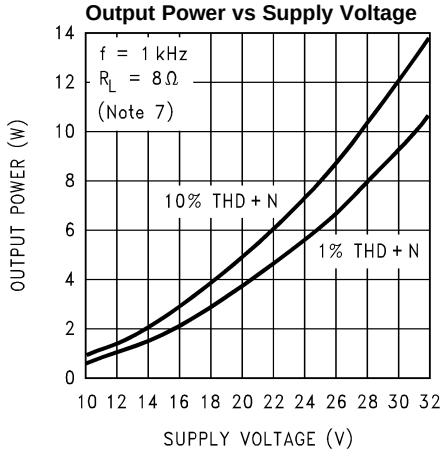

Figure 30.

Frequency Response

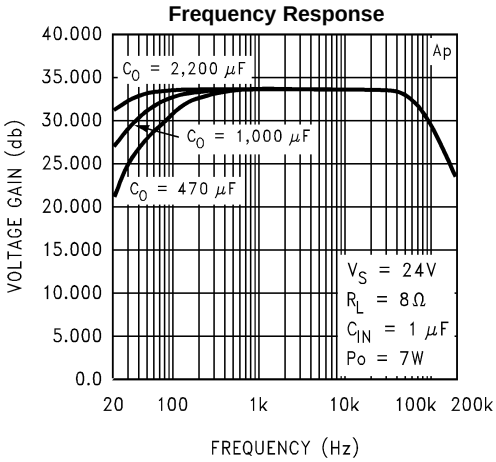

Figure 31.

THD+N vs Frequency

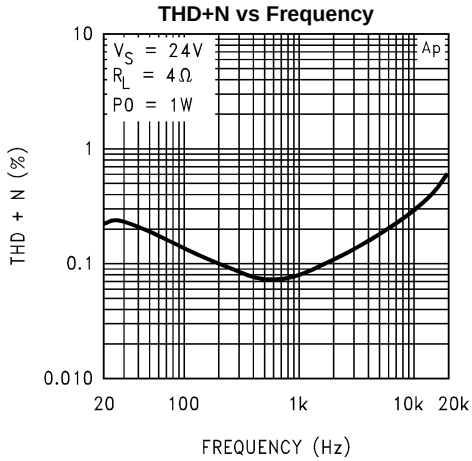

Figure 32.

THD+N vs Frequency

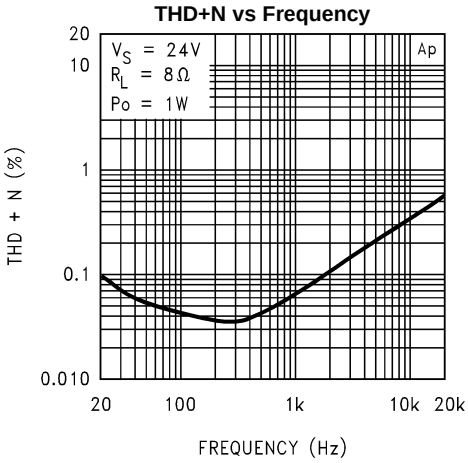

Figure 33.

Frequency Response

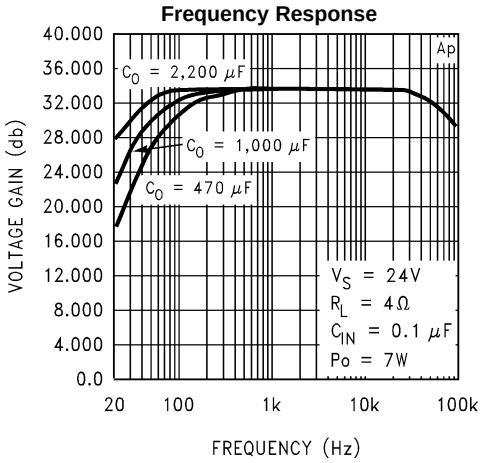

Figure 34.

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Typicals are measured at 25°C and represent the parametric norm.

Channel Separation

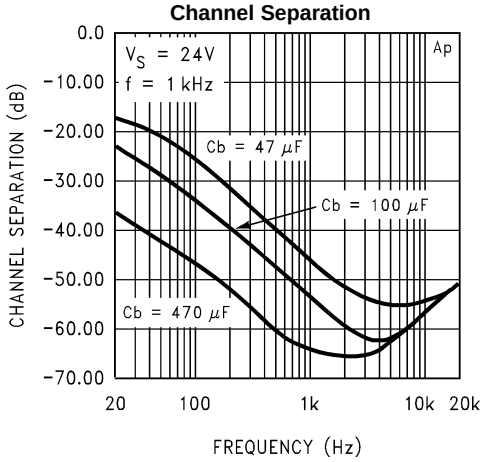

Figure 35.

PSRR vs Frequency

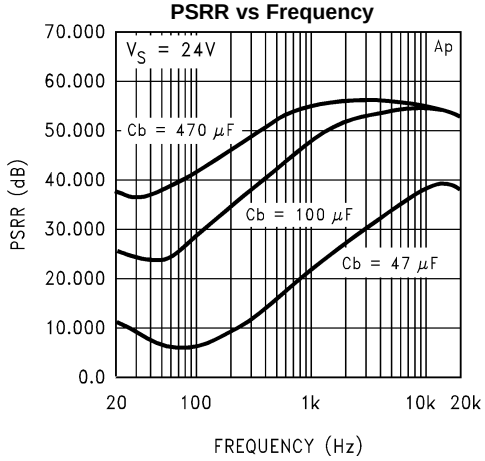

Figure 36.

Supply Current vs Supply Voltage

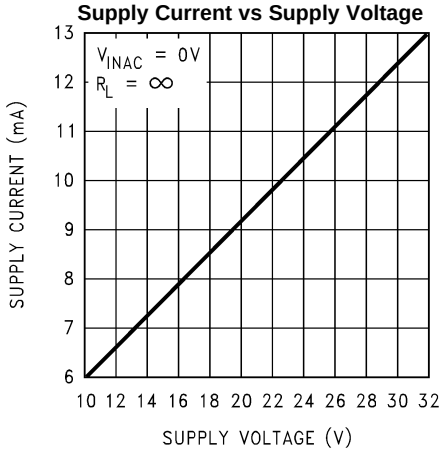

Figure 37.

Power Derating Curve

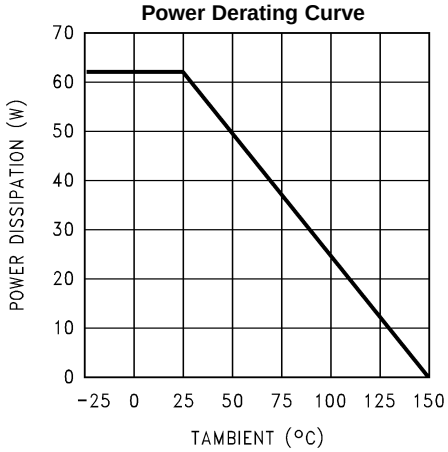

Figure 38.

Power Dissipation vs Output Power

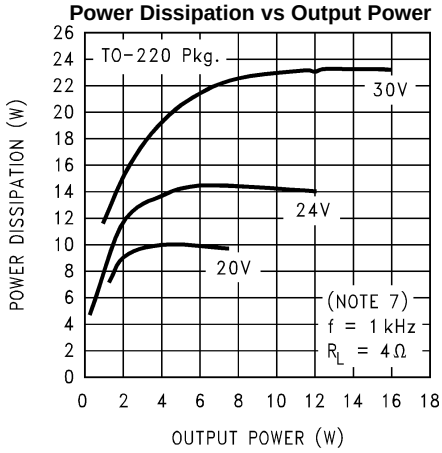

Figure 39.

Power Dissipation vs Output Power

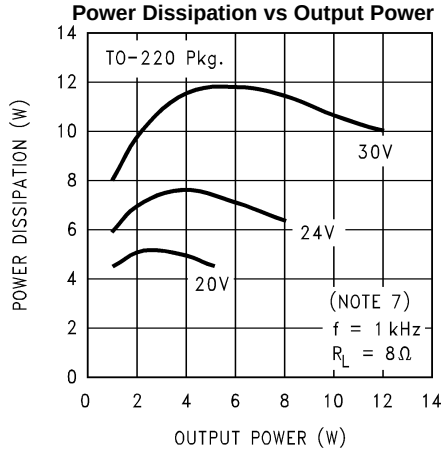

Figure 40.

Copyright © 1999–2013, Texas Instruments Incorporated

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Typicals are measured at 25°C and represent the parametric norm.

Power Dissipation vs Output Power

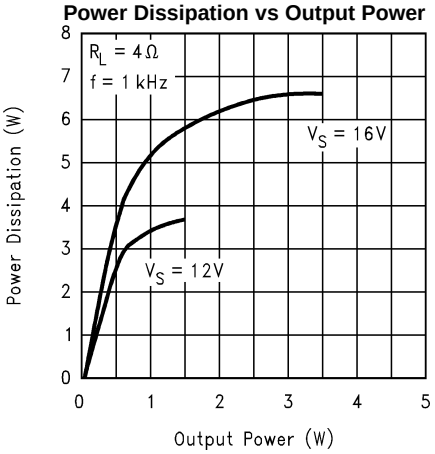

Figure 41.

Power Dissipation vs Output Power

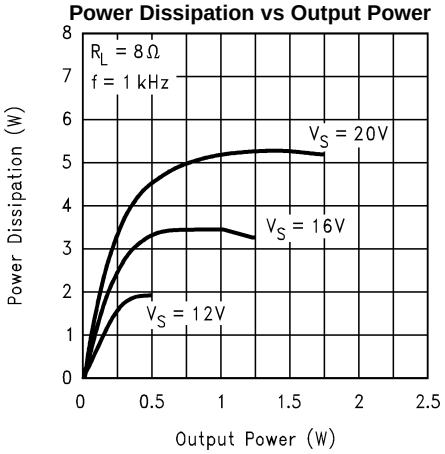

Figure 42.

APPLICATION INFORMATION

The LM4755 contains circuitry to pull down the bias line internally, effectively shutting down the input stage. An external R-C should be used to adjust the timing of the pull-down. If the bias line is pulled down too quickly, currents induced in the internal bias resistors will cause a momentary DC voltage to appear across the inputs of each amplifier's internal differential pair, resulting in an output DC shift towards Vsupply. An R-C timing circuit should be used to limit the pull-down time such that output “pops” and signal feedthroughs will be minimized. The pull-down timing is a function of a number of factors, including the internal mute circuitry, the voltage used to activate the mute, the bias capacitor, the half-supply voltage, and internal resistances used in the half-supply generator. Table 1 shows a list of recommended values for the external R-C.

Table 1. RECOMMENDED VALUES FOR MUTE CIRCUIT

V_{MUTE}	V_{CC}	Rm	Cm
5V	12V	18 kΩ	10 µF
5V	15V	18 kΩ	10 µF
5V	20V	12 kΩ	10 µF
5V	24V	12 kΩ	10 µF
5V	28V	8.2 kΩ	10 µF
5V	30V	8.2 kΩ	10 µF

CAPACITOR SELECTION AND FREQUENCY RESPONSE

With the LM4755, as in all single supply amplifiers, AC coupling capacitors are used to isolate the DC voltage present at the inputs (pins 3, 7) and outputs (pins 1, 8). As mentioned earlier in the EXTERNAL COMPONENTS DESCRIPTION section these capacitors create high-pass filters with their corresponding input/output impedances. The Typical Application Circuit shown in Figure 1 shows input and output capacitors of 0.1 µF and 1,000 µF respectively. At the input, with an 83 kΩ typical input resistance, the result is a high pass 3 dB point occurring at 19 Hz. There is another high pass filter at 39.8 Hz created with the output load resistance of 4Ω. Careful selection of these components is necessary to ensure that the desired frequency response is obtained. The Frequency Response curves in the TYPICAL PERFORMANCE CHARACTERISTICS section show how different output coupling capacitors affect the low frequency roll-off.

OPERATING IN BRIDGE-MODE

Though designed for use as a single-ended amplifier, the LM4755 can be used to drive a load differentially (bridge-mode). Due to the low pin count of the package, only the non-inverting inputs are available. An inverted signal must be provided to one of the inputs. This can easily be done with the use of an inexpensive op-amp configured as a standard inverting amplifier. An LF353 is a good low-cost choice. Care must be taken, however, for a bridge-mode amplifier must theoretically dissipate four times the power of a single-ended type. The load seen by each amplifier is effectively half that of the actual load being used, thus an amplifier designed to drive a 4Ω load in single-ended mode should drive an 8Ω load when operating in bridge-mode.

Copyright © 1999–2013, Texas Instruments Incorporated

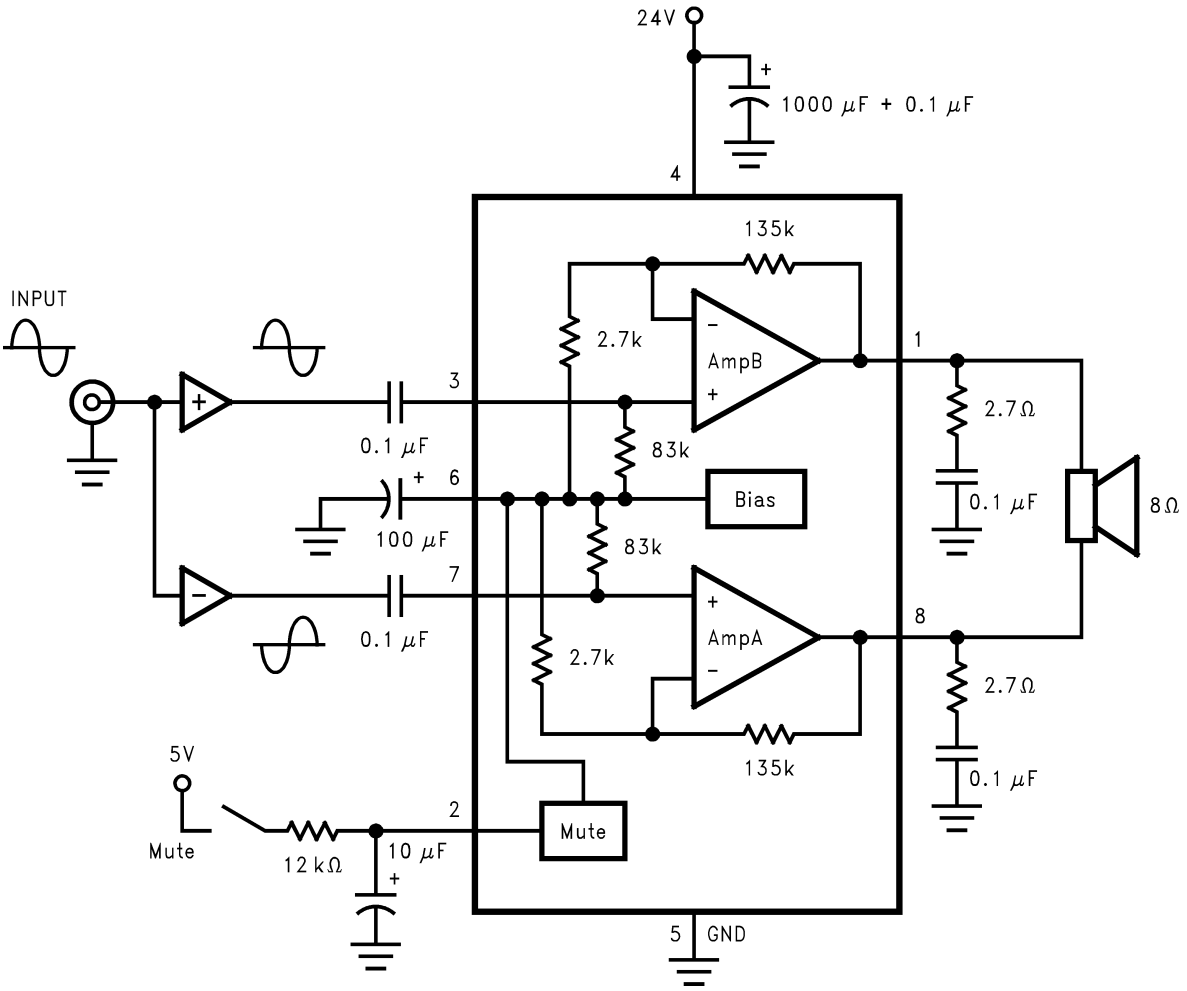

Figure 43. Bridge-Mode Application

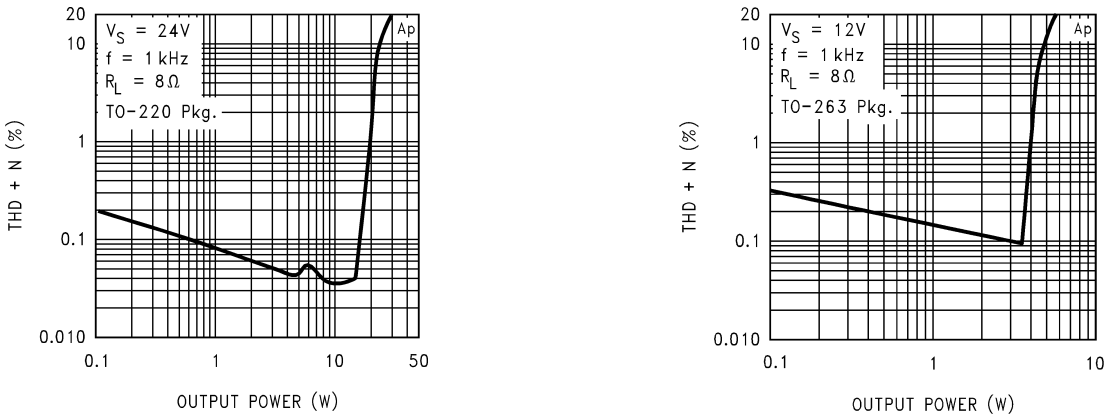

Figure 44. THD+N vs P_{OUT} for Bridge-Mode Application

PREVENTING OSCILLATIONS

With the integration of the feedback and bias resistors on-chip, the LM4755 fits into a very compact package. However, due to the close proximity of the non-inverting input pins to the corresponding output pins, the inputs should be AC terminated at all times. If the inputs are left floating, the amplifier will have a positive feedback path through high impedance coupling, resulting in a high frequency oscillation. In most applications, this termination is typically provided by the previous stage's source impedance. If the application will require an external signal, the inputs should be terminated to ground with a resistance of 50 kΩ or less on the AC side of the input coupling capacitors.

UNDERVOLTAGE SHUTDOWN

If the power supply voltage drops below the minimum operating supply voltage, the internal under-voltage detection circuitry pulls down the half-supply bias line, shutting down the preamp section of the LM4755. Due to the wide operating supply range of the LM4755, the threshold is set to just under 9V. There may be certain applications where a higher threshold voltage is desired. One example is a design requiring a high operating supply voltage, with large supply and bias capacitors, and there is little or no other circuitry connected to the main power supply rail. In this circuit, when the power is disconnected, the supply and bias capacitors will discharge at a slower rate, possibly resulting in audible output distortion as the decaying voltage begins to clip the output signal. An external circuit may be used to sense for the desired threshold, and pull the bias line (pin 6) to ground to disable the input preamp. Figure 45 shows an example of such a circuit. When the voltage across the zener diode drops below its threshold, current flow into the base of Q1 is interrupted. Q2 then turns on, discharging the bias capacitor. This discharge rate is governed by several factors, including the bias capacitor value, the bias voltage, and the resistor at the emitter of Q2. An equation for approximating the value of the emitter discharge resistor, R, is given below:

$$R = (0.7v) / (Cb \bullet (V_{CC}/2) / 0.1s) \quad (1)$$

Note that this is only a linearized approximation based on a discharge time of 0.1s. The circuit should be evaluated and adjusted for each application.

As mentioned earlier in the Built-in Mute Circuit section, when using an external circuit to pull down the bias line, the rate of discharge will have an effect on the turn-off induced distortions. Please refer to the Table 1 section for more information.

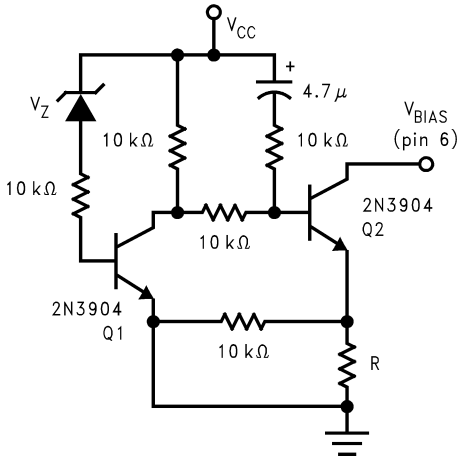

Figure 45. External Undervoltage Pull-Down

THERMAL CONSIDERATIONS

Heat Sinking

Proper heatsinking is necessary to ensure that the amplifier will function correctly under all operating conditions. A heatsink that is too small will cause the die to heat excessively and will result in a degraded output signal as the thermal protection circuitry begins to operate.

Copyright © 1999–2013, Texas Instruments Incorporated

The choice of a heatsink for a given application is dictated by several factors: the maximum power the IC needs to dissipate, the worst-case ambient temperature of the circuit, the junction-to-case thermal resistance, and the maximum junction temperature of the IC. The heat flow approximation equation used in determining the correct heatsink maximum thermal resistance is given below:

$T_J – T_A = P_{DMAX} \bullet (\theta_{JC} + \theta_{CS} + \theta_{SA})$

where

- P_{DMAX} = maximum power dissipation of the IC
- T_J(°C) = junction temperature of the IC
- T_A(°C) = ambient temperature
- θ_{JC}(°C/W) = junction-to-case thermal resistance of the IC
- θ_{CS}(°C/W) = case-to-heatsink thermal resistance (typically 0.2 to 0.5 °C/W)
- θ_{SA}(°C/W) = thermal resistance of heatsink (2)

When determining the proper heatsink, the above equation should be re-written as:

$\theta_{SA} \leq [(T_J – T_A) / P_{DMAX}] - \theta_{JC} – \theta_{CS}$ (3)

DDPAK HEATSINKING

Surface mount applications will be limited by the thermal dissipation properties of printed circuit board area. The DDPAK package is not recommended for surface mount applications with V_S > 16V due to limited printed circuit board area. There are DDPAK package enhancements, such as clip-on heatsinks and heatsinks with adhesives, that can be used to improve performance.

Standard FR-4 single-sided copper clad will have an approximate Thermal resistance (θ_{SA}) ranging from:

1.5 × 1.5 in. sq.	20–27°C/W	(T_A=28°C, Sine wave testing, 1 oz. Copper)
2 × 2 in. sq.	16–23°C/W	

The above values for θ_{SA} vary widely due to dimensional proportions (i.e. variations in width and length will vary θ_{SA}).

For audio applications, where peak power levels are short in duration, this part will perform satisfactory with less heatsinking/copper clad area. As with any high power design proper bench testing should be undertaken to assure the design can dissipate the required power. Proper bench testing requires attention to worst case ambient temperature and air flow. At high power dissipation levels the part will show a tendency to increase saturation voltages, thus limiting the undistorted power levels.

DETERMINING MAXIMUM POWER DISSIPATION

For a single-ended class AB power amplifier, the theoretical maximum power dissipation point is a function of the supply voltage, V_S, and the load resistance, R_L and is given by the following equation:

(single channel)

P_{DMAX} (W) = $[V_S^2 / (2 \bullet \pi^2 \bullet R_L)]$

The above equation is for a single channel class-AB power amplifier. For dual amplifiers such as the LM4755, the equation for calculating the total maximum power dissipated is:

(dual channel)

P_{DMAX} (W) = $2 \bullet [V_S^2 / (2 \bullet \pi^2 \bullet R_L)]$

or

$V_S^2 / (\pi^2 \bullet R_L)$

(Bridged Outputs)

P_{DMAX} (W) = $4[V_S^2 / (2\pi^2 \bullet R_L)]$

HEATSINK DESIGN EXAMPLE

Determine the system parameters:

V_S = 24V	Operating Supply Voltage
R_L = 4Ω	Minimum Load Impedance
T_A = 55°C	Worst Case Ambient Temperature

Device parameters from the datasheet:

T_J = 150°C	Maximum Junction Temperature
θ_{JC} = 2°C/W	Junction-to-Case Thermal Resistance

Calculations:

$2 \bullet P_{DMAX} = 2 \bullet [V_S^2 / 2 \bullet \pi^2 \bullet R_L)] = (24V)^2 / (2 \bullet \pi^2 \bullet 4\Omega) = 14.6W$

$\theta_{SA} \leq [(T_J\text{-}T_A) / P_{DMAX}] - \theta_{JC} – \theta_{CS} = [(150°C - 55°C) / 14.6W] - 2°C/W – 0.2°C/W = 4.3°C/W$

Conclusion: Choose a heatsink with $\theta_{SA} \leq 4.3°C/W$.

DDPAK HEATSINK DESIGN EXAMPLES

Example 1: (Stereo Single-Ended Output)

Given: T_A=30°C

T_J=150°C

R_L=4Ω

V_S=12V

θ_{JC}=2°C/W

P_{DMAX} from P_D vs P_O Graph:

$$P_{DMAX} \approx 3.7W \tag{4}$$

Calculating P_{DMAX}:

$$P_{DMAX} = V_{CC}^2/(\pi^2 R_L) = (12V)^2/\pi^2(4\Omega)) = 3.65W \tag{5}$$

Calculating Heatsink Thermal Resistance:

$$\theta_{SA} < T_J - T_A / P_{DMAX} - \theta_{JC} - \theta_{CS} \tag{6}$$

$$\theta_{SA} < 120°C/3.7W - 2.0°C/W - 0.2°C/W = 30.2°C/W \tag{7}$$

Therefore the recommendation is to use 1.5 × 1.5 square inch of single-sided copper clad.

Example 2: (Stereo Single-Ended Output)

Given: T_A=50°C

T_J=150°C

R_L=4Ω

V_S=12V

θ_{JC}=2°C/W

P_{DMAX} from P_D vs P_O Graph:

$$P_{DMAX} \approx 3.7W \tag{8}$$

Calculating P_{DMAX}:

$$P_{DMAX} = V_{CC}^2/(\pi^2 R_L)= (12V)^2/(\pi^2(4\Omega)) = 3.65W \tag{9}$$

Calculating Heatsink Thermal Resistance:

$$\theta_{SA} < [(T_J - T_A) / P_{DMAX}] - \theta_{JC} - \theta_{CS} \tag{10}$$

Copyright © 1999–2013, Texas Instruments Incorporated

$$\theta_{SA} < 100°C/3.7W - 2.0°C/W - 0.2°C/W = 24.8°C/W \quad (11)$$

Therefore the recommendation is to use 2.0 × 2.0 square inch of single-sided copper clad.

Example 3: (Bridged Output)

Given: T_A=50°C

T_J=150°C

R_L=8Ω

V_S=12V

θ_{JC}=2°C/W

Calculating P_{DMAX}:

$$P_{DMAX} = 4[V_{CC}^2/(2\pi^2 R_L)] = 4(12V)^2/(2\pi^2(8\Omega)) = 3.65W \quad (12)$$

Calculating Heatsink Thermal Resistance:

$$\theta_{SA} < [(T_J - T_A) / P_{DMAX}] - \theta_{JC} - \theta_{CS} \quad (13)$$

$$\theta_{SA} < 100°C / 3.7W - 2.0°C/W - 0.2°C/W = 24.8°C/W \quad (14)$$

Therefore the recommendation is to use 2.0 × 2.0 square inch of single-sided copper clad.

LAYOUT AND GROUND RETURNS

Proper PC board layout is essential for good circuit performance. When laying out a PC board for an audio power amplifier, particular attention must be paid to the routing of the output signal ground returns relative to the input signal and bias capacitor grounds. To prevent any ground loops, the ground returns for the output signals should be routed separately and brought together at the supply ground. The input signal grounds and the bias capacitor ground line should also be routed separately. The 0.1 µF high frequency supply bypass capacitor should be placed as close as possible to the IC.

Copyright © 1999–2013, Texas Instruments Incorporated

PC BOARD LAYOUT-COMPOSITE

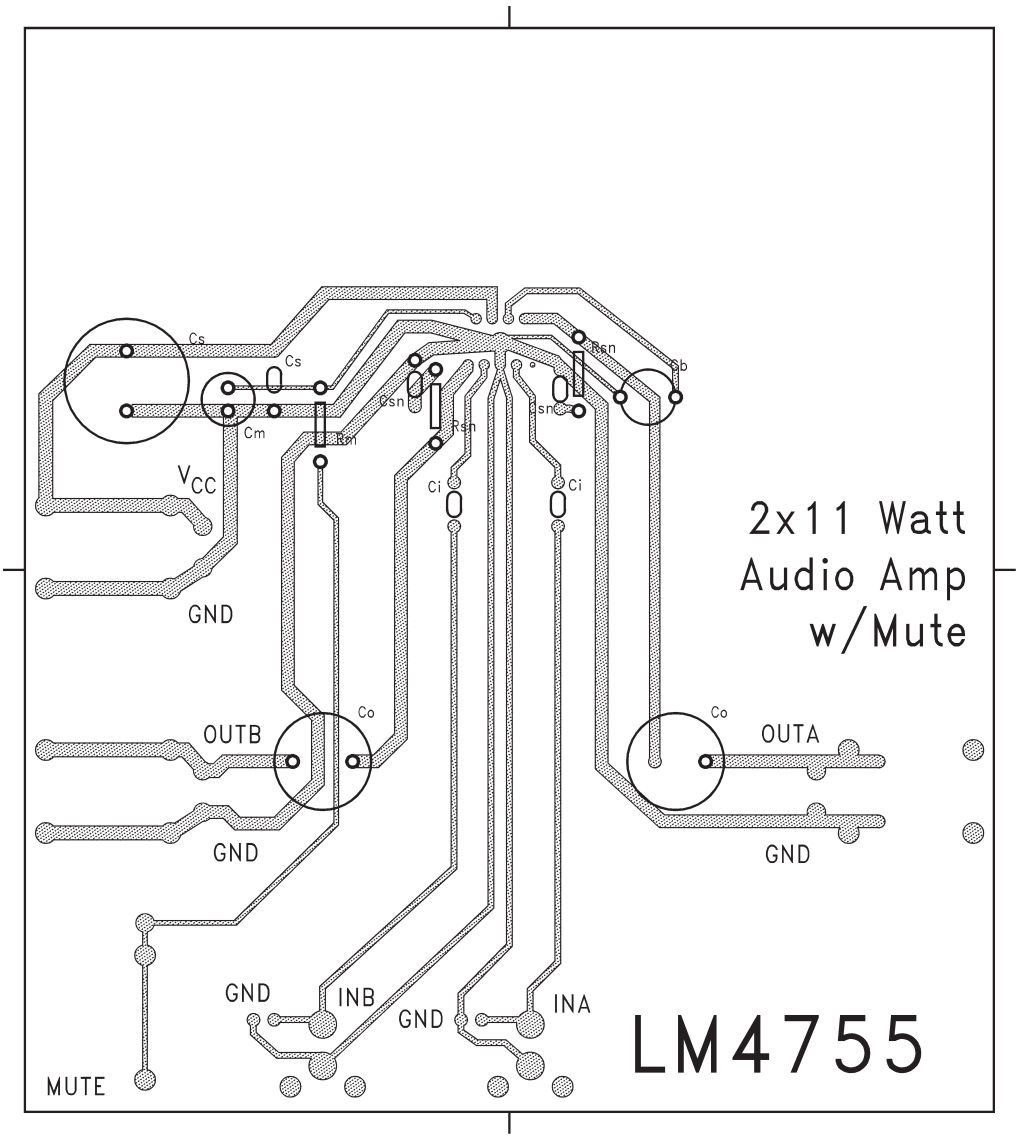

Figure 46.

Copyright © 1999–2013, Texas Instruments Incorporated

PC BOARD LAYOUT-SILK SCREEN

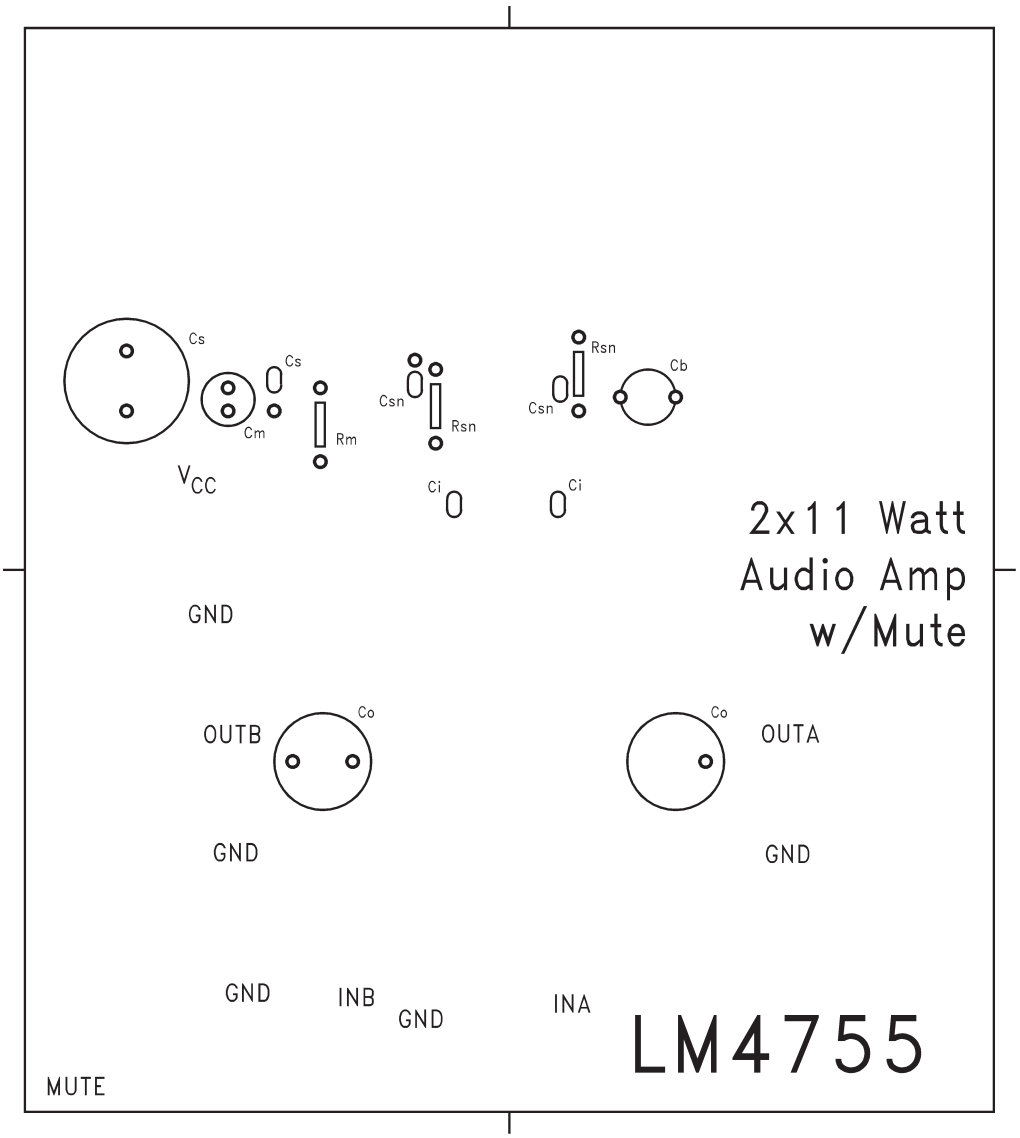

Figure 47.

PC BOARD LAYOUT-SOLDER SIDE

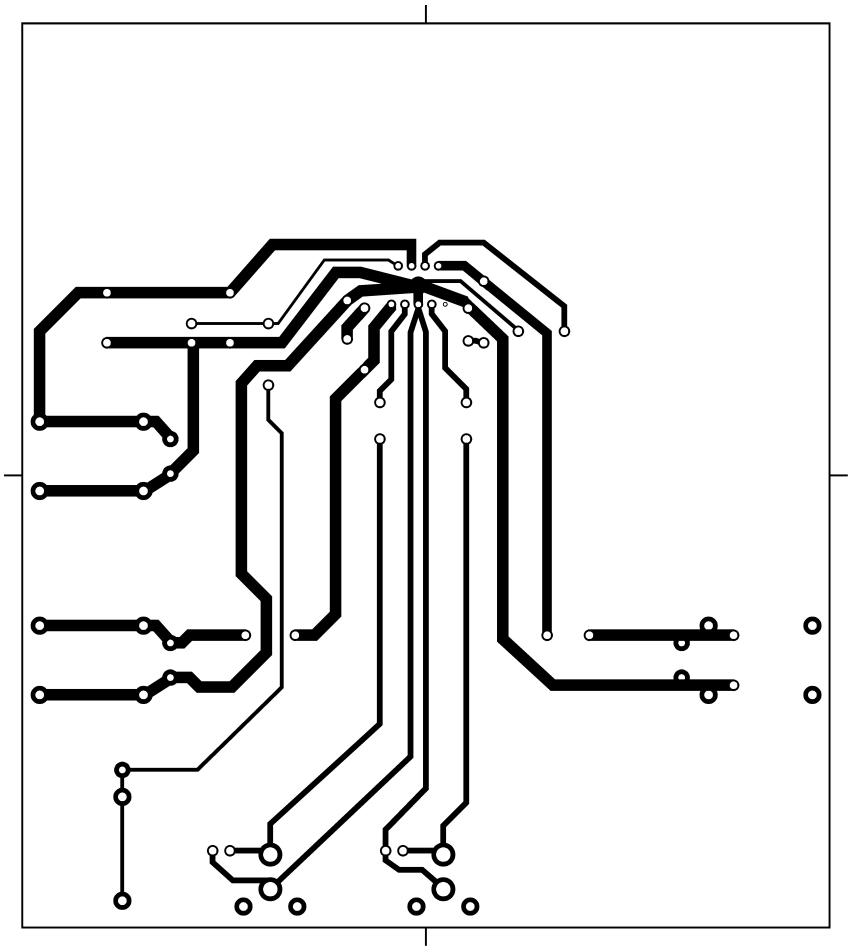

Figure 48.

Copyright © 1999–2013, Texas Instruments Incorporated

REVISION HISTORY

Changes from Revision D (April 2013) to Revision E	Page
• Changed layout of National Data Sheet to TI format	22

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
LM4755TSX/NOPB	Active	Production	DDPAK/TO-263 (KTW) | 9	500 | LARGE T&R	ROHS Exempt	SN	Level-3-245C-168 HR	-20 to 80	LM4755TS
LM4755TSX/NOPB.B	Active	Production	DDPAK/TO-263 (KTW) | 9	500 | LARGE T&R	ROHS Exempt	SN	Level-3-245C-168 HR	-20 to 80	LM4755TS

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

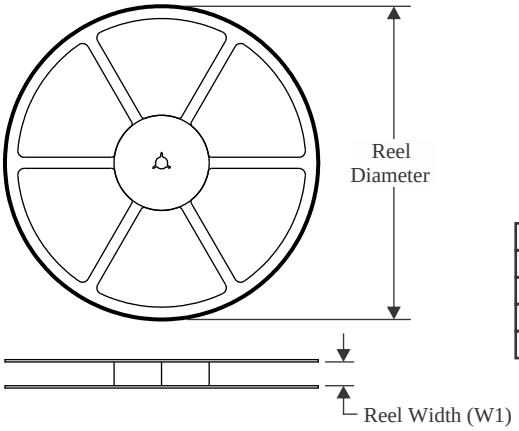

TAPE DIMENSIONS

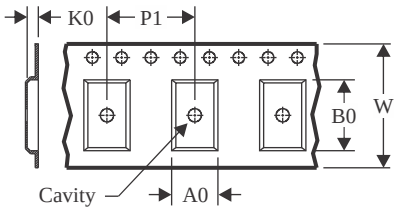

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

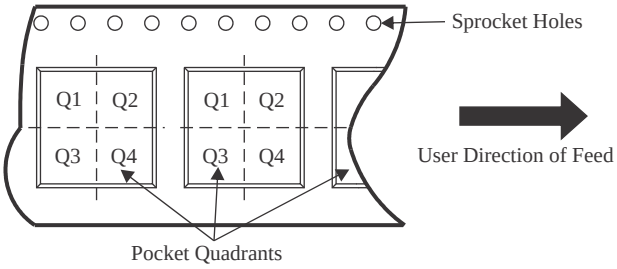

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LM4755TSX/NOPB	DDPAK/ TO-263	KTW	9	500	330.0	24.4	10.75	14.85	5.0	16.0	24.0	Q2

TAPE AND REEL BOX DIMENSIONS

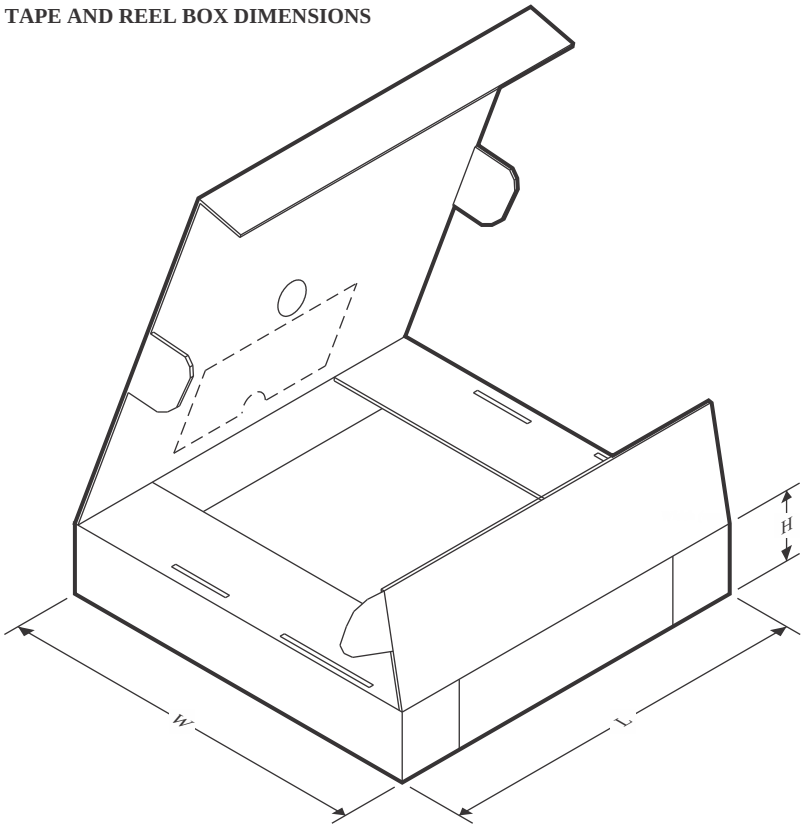

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LM4755TSX/NOPB	DDPAK/TO-263	KTW	9	500	356.0	356.0	45.0

KTW0009A

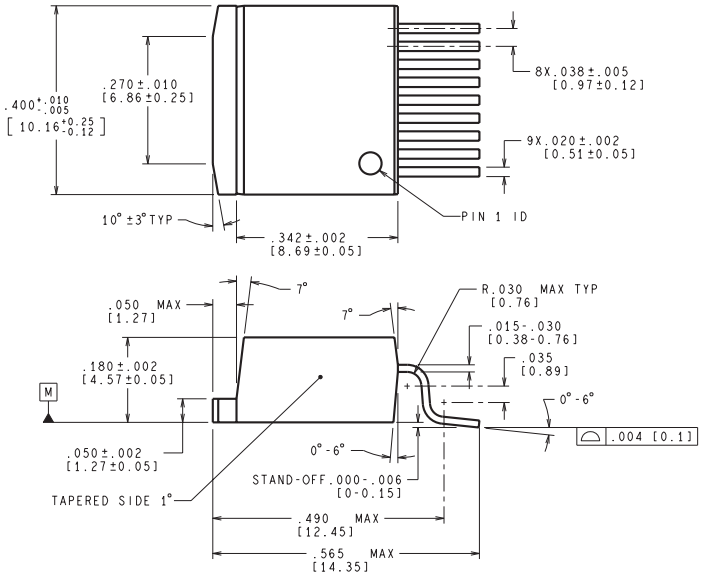

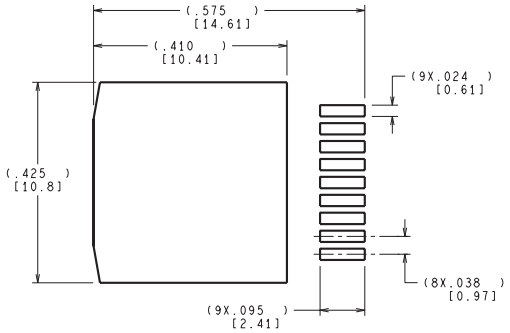

RECOMMENDED LAND PATTERN

CONTROLLING DIMENSION: INCH
DIMENSIONS IN [ ] ARE MILLIMETERS

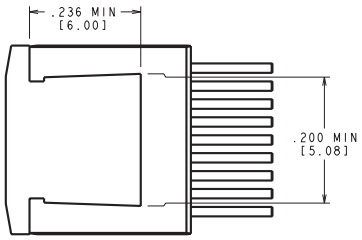

BOTTOM SIDE OF PACKAGE

TS9A (Rev B)

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated