

## SN7546x Darlington Transistor Arrays

### 1 Features

- 500-mA Rated Collector Current (Single Output)
- High-Voltage Output 100 V
- Output Clamp Diodes
- Inputs Compatible With Various Types of Logic
- Relay Driver Applications
- Higher-Voltage Versions of ULN2003A and ULN2004A, for Commercial Temperature range

### 2 Applications

- Relay Drivers
- Hammer Drivers
- Lamp Drivers
- Display Drivers (LED and Gas Discharge)
- Line Drivers
- Logic Buffers

### 3 Description

The SN75468 and SN75469 are high-voltage, high-current Darlington transistor arrays. Each consists of seven NPN Darlington pairs that feature high-voltage outputs with common-cathode clamp diodes for switching inductive loads. The collector-current rating of each Darlington pair is 500 mA. The Darlington pairs may be paralleled for higher current capability. Applications include relay drivers, hammer drivers, lamp drivers, display drivers (LED and gas discharge), line drivers, and logic buffers.


The SN75468 has a 2700-Ω series base resistor for each Darlington pair for operation directly with TTL or 5-V CMOS. The SN75469 has a 10.5-kΩ series base resistor to allow its operation directly with CMOS or PMOS that use supply voltages of 6 to 15 V. The required input current is below that of the SN75468.

#### Device Information<sup>(1)</sup>

| PART NUMBER | PACKAGE (PIN) | BODY SIZE (NOM)    |
|-------------|---------------|--------------------|
| SN7546x     | D (16)        | 9.90 mm × 3.91 mm  |
|             | N (16)        | 19.30 mm × 6.35 mm |
|             | NS (16)       | 10.30 mm × 5.30 mm |

(1) For all available packages, see the orderable addendum at the end of the datasheet.

### 4 Simplified Schematic

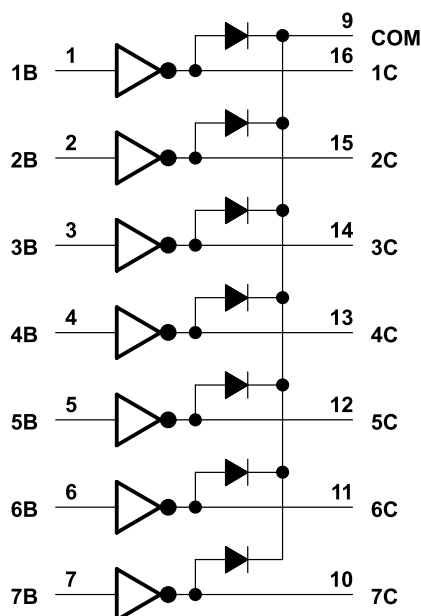

## Table of Contents

|                                                  |          |                                                                  |           |
|--------------------------------------------------|----------|------------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                          | <b>1</b> | 9.2 Functional Block Diagram .....                               | <b>9</b>  |
| <b>2 Applications</b> .....                      | <b>1</b> | 9.3 Feature Description .....                                    | <b>9</b>  |
| <b>3 Description</b> .....                       | <b>1</b> | 9.4 Device Functional Modes .....                                | <b>9</b>  |
| <b>4 Simplified Schematic</b> .....              | <b>1</b> | <b>10 Application and Implementation</b> .....                   | <b>10</b> |
| <b>5 Revision History</b> .....                  | <b>2</b> | 10.1 Application Information .....                               | <b>10</b> |
| <b>6 Pin Configuration and Functions</b> .....   | <b>3</b> | 10.2 Typical Application .....                                   | <b>10</b> |
| <b>7 Specifications</b> .....                    | <b>4</b> | 10.3 System Examples .....                                       | <b>12</b> |
| 7.1 Absolute Maximum Ratings .....               | <b>4</b> | <b>11 Power Supply Recommendations</b> .....                     | <b>14</b> |
| 7.2 ESD Ratings .....                            | <b>4</b> | <b>12 Layout</b> .....                                           | <b>14</b> |
| 7.3 Recommended Operating Conditions .....       | <b>4</b> | 12.1 Layout Guidelines .....                                     | <b>14</b> |
| 7.4 Thermal Information .....                    | <b>4</b> | 12.2 Layout Example .....                                        | <b>14</b> |
| 7.5 Electrical Characteristics .....             | <b>5</b> | <b>13 Device and Documentation Support</b> .....                 | <b>15</b> |
| 7.6 Switching Characteristics .....              | <b>5</b> | 13.1 Related Links .....                                         | <b>15</b> |
| 7.7 Typical Characteristics .....                | <b>6</b> | 13.2 Trademarks .....                                            | <b>15</b> |
| <b>8 Parameter Measurement Information</b> ..... | <b>7</b> | 13.3 Electrostatic Discharge Caution .....                       | <b>15</b> |
| <b>9 Detailed Description</b> .....              | <b>9</b> | 13.4 Glossary .....                                              | <b>15</b> |
| 9.1 Overview .....                               | <b>9</b> | <b>14 Mechanical, Packaging, and Orderable Information</b> ..... | <b>15</b> |

## 5 Revision History

### Changes from Revision D (November 2004) to Revision E

Page


- Added *Applications*, *Device Information* table, *Pin Functions* table, *ESD Ratings* table, *Thermal Information* table, *Typical Characteristics*, *Feature Description* section, *Device Functional Modes*, *Application and Implementation* section, *Power Supply Recommendations* section, *Layout* section, *Device and Documentation Support* section, and *Mechanical, Packaging, and Orderable Information* section. .... **1**
- Deleted *Ordering Information* table. .... **1**

## 6 Pin Configuration and Functions

SN75468 . . . D, N, OR NS PACKAGE

SN75469 . . . D OR N PACKAGE

(TOP VIEW)



### Pin Functions

| PIN    |         | TYPE | DESCRIPTION                                                           |
|--------|---------|------|-----------------------------------------------------------------------|
| NAME   | NO.     |      |                                                                       |
| <1:7>B | 1 - 7   | I    | Channel 1 through 7 darlington base input                             |
| <1:7>C | 16 - 10 | O    | Channel 1 through 7 darlington collector output                       |
| E      | 7       | —    | Common Emmitter shared by all channels (typically tied to ground)     |
| COM    | 8       | I/O  | Common cathode node for flyback diodes (required for inductive loads) |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|           |                                        | MIN | MAX  | UNIT |
|-----------|----------------------------------------|-----|------|------|
| $V_{CE}$  | Collector-emitter voltage              |     | 100  | V    |
| $V_I$     | Input voltage <sup>(2)</sup>           |     | 30   | V    |
|           | Peak collector current                 |     | 500  | mA   |
| $I_{OK}$  | Output clamp current                   |     | 500  | mA   |
|           | Total emitter-terminal current         |     | –2.5 | A    |
| $T_J$     | Operating virtual junction temperature |     | 150  | °C   |
| $T_{stg}$ | Storage temperature range              | –65 | 150  | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to the emitter/substrate terminal E, unless otherwise noted.

### 7.2 ESD Ratings

|             |                         |                                                                                          | VALUE | UNIT |
|-------------|-------------------------|------------------------------------------------------------------------------------------|-------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>              | ±2000 | V    |
|             |                         | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup> | ±500  |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|          |                      | MIN | MAX | UNIT |
|----------|----------------------|-----|-----|------|
| $V_I$    |                      | 0   | 5   | V    |
| $V_{CC}$ |                      | 0   | 100 | V    |
| $T_J$    | Junction Temperature | –40 | 125 | °C   |

### 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | SN7546x | UNIT |
|-------------------------------|----------------------------------------------|---------|------|
|                               |                                              | D       |      |
|                               |                                              | 16 PINS |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 73      | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 40.3    |      |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 38.9    |      |
| $\Psi_{JT}$                   | Junction-to-top characterization parameter   | 10.9    |      |
| $\Psi_{JB}$                   | Junction-to-board characterization parameter | 38.7    |      |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | N/A     |      |

- (1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

## 7.5 Electrical Characteristics

 $T_A = 25^\circ\text{C}$  (unless otherwise noted)

| PARAMETER            |                                      | TEST CONDITIONS <sup>(1)</sup>                                         |                         | SN75468 |      |     | SN75469 |      |     | UNIT |
|----------------------|--------------------------------------|------------------------------------------------------------------------|-------------------------|---------|------|-----|---------|------|-----|------|
|                      |                                      |                                                                        |                         | MIN     | TYP  | MAX | MIN     | TYP  | MAX |      |
| V <sub>I(on)</sub>   | On-state input voltage               | V <sub>CE</sub> = 2 V                                                  | I <sub>C</sub> = 125 mA |         |      |     |         |      |     | V    |
|                      |                                      |                                                                        | I <sub>C</sub> = 200 mA | 2.4     |      |     |         |      |     |      |
|                      |                                      |                                                                        | I <sub>C</sub> = 250 mA | 2.7     |      |     |         |      |     |      |
|                      |                                      |                                                                        | I <sub>C</sub> = 275 mA |         |      |     |         |      |     |      |
|                      |                                      |                                                                        | I <sub>C</sub> = 300 mA | 3       |      |     |         |      |     |      |
|                      |                                      |                                                                        | I <sub>C</sub> = 350 mA |         |      |     |         |      |     |      |
| V <sub>CE(sat)</sub> | Collector-emitter saturation voltage | I <sub>I</sub> = 250 μA, I <sub>C</sub> = 100 mA                       |                         | 0.9     | 1.1  | 0.9 | 1.1     | V    |     |      |
|                      |                                      | I <sub>I</sub> = 350 μA, I <sub>C</sub> = 100 mA                       |                         | 1       | 1.3  | 1   | 1.3     |      |     |      |
|                      |                                      | I <sub>I</sub> = 500 μA, I <sub>C</sub> = 100 mA                       |                         | 1.2     | 1.6  | 1.2 | 1.6     |      |     |      |
| V <sub>F</sub>       | Clamp-diode forward voltage          | I <sub>F</sub> = 350 mA                                                |                         | 1.7     | 2    | 1.7 | 2       | V    |     |      |
| I <sub>CEX</sub>     | collector cutoff current             | V <sub>CE</sub> = 100 V, I <sub>I</sub> = 0                            |                         | 50      |      |     | 50      |      |     | μA   |
|                      |                                      | V <sub>CE</sub> = 100 V,<br>T <sub>A</sub> = 70°C                      | I <sub>I</sub> = 0      | 100     |      |     | 100     |      |     |      |
|                      |                                      |                                                                        | V <sub>I</sub> = 1 V    |         |      |     | 500     |      |     |      |
| I <sub>I(off)</sub>  | Off-state input current              | V <sub>CE</sub> = 50 V, I <sub>C</sub> = 500 μA, T <sub>A</sub> = 70°C |                         | 50      | 65   | 50  | 65      | μA   |     |      |
| I <sub>I</sub>       | Input current                        | V <sub>I</sub> = 3.85 V                                                |                         | 0.93    | 1.35 |     |         |      | mA  |      |
|                      |                                      | V <sub>I</sub> = 5 V                                                   |                         |         |      |     | 0.35    | 0.5  |     |      |
|                      |                                      | V <sub>I</sub> = 12 V                                                  |                         |         |      |     | 1       | 1.45 |     |      |
| I <sub>R</sub>       | Clamp-diode reverse current          | V <sub>R</sub> = 100 V                                                 |                         | 50      |      |     | 50      |      |     | μA   |
|                      |                                      | V <sub>R</sub> = 100 V, T <sub>A</sub> = 70°C                          |                         | 100     |      |     | 10      |      |     |      |
| C <sub>i</sub>       | Input Capacitance                    | V <sub>I</sub> = 0, f = 1 MHz                                          |                         | 15      | 25   | 15  | 25      | pF   |     |      |

(1) All electrical characteristics are measured with 0.1- $\mu\text{F}$  capacitors connected at REF, CT, and  $V_{CC}$  to GND.


## 7.6 Switching Characteristics

 $T_A = 25^\circ\text{C}$  free-air temperature


| PARAMETER        |                                                  | TEST CONDITIONS <sup>(1)</sup>                                                       | MIN                 | TYP  | MAX | UNIT |
|------------------|--------------------------------------------------|--------------------------------------------------------------------------------------|---------------------|------|-----|------|
| t <sub>PLH</sub> | Propagation delay time, low-to-high-level output | V <sub>S</sub> = 20 V, R <sub>L</sub> = 163 Ω, C <sub>L</sub> = 15 pF, See Figure 14 |                     | 0.25 | 1   | μs   |
| t <sub>PHL</sub> | Propagation delay time, high-to-low-level output |                                                                                      |                     | 0.25 | 1   | μs   |
| V <sub>OH</sub>  | High-level output voltage after switching        | V <sub>S</sub> = 50 V, I <sub>O</sub> = 300 mA, See Figure 14                        | V <sub>S</sub> – 20 |      |     | mV   |

(1) All switching characteristics are measured with 0.1- $\mu\text{F}$  capacitors connected at REF and  $V_{CC}$  to GND.


## 7.7 Typical Characteristics

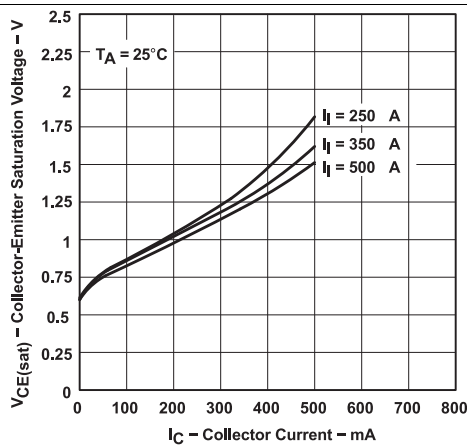


**Figure 1. Collector-Emitter Saturation Voltage vs Collector Current (One Darlington)**

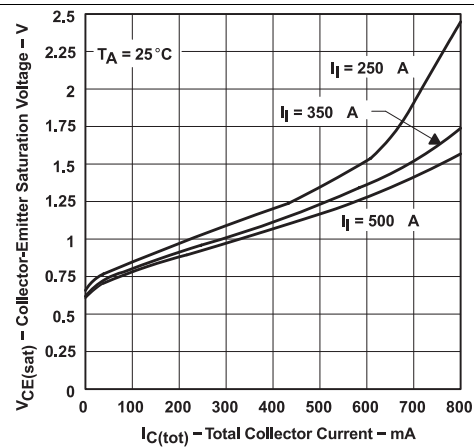


**Figure 2. Collector-Emitter Saturation Voltage vs Total Collector Current (Two Darlington in Parallel)**

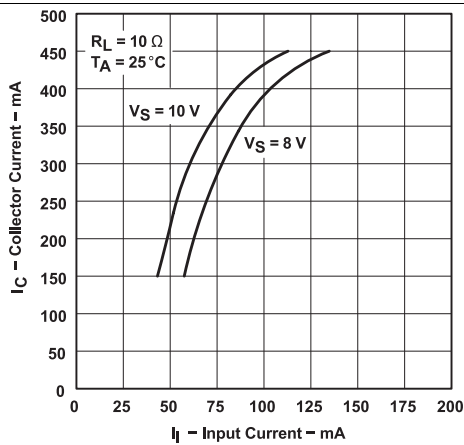

**Figure 3. Output Current vs Input Current**

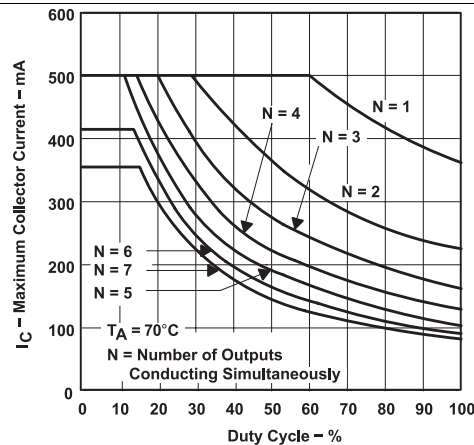

**Figure 4. D Package Maximum Collector Current vs Duty Cycle**

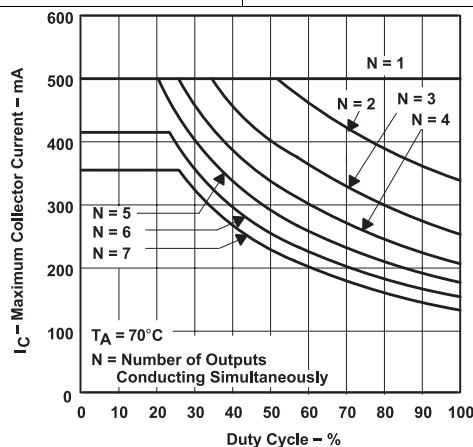

**Figure 5. N Package Maximum Collector Current vs Duty Cycle**

## 8 Parameter Measurement Information

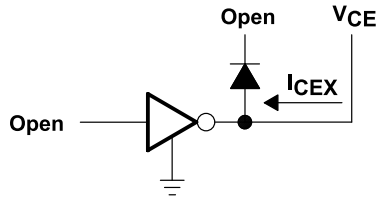


Figure 6.  $I_{CEX}$




Figure 7.  $I_{CES}$

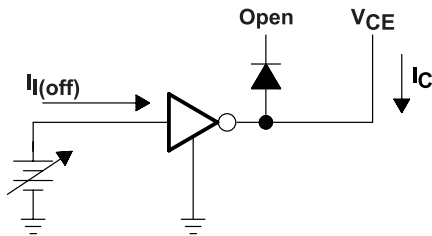


Figure 8.  $I_{I(off)}$

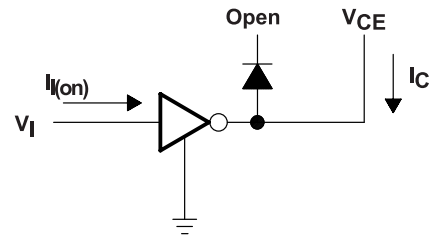


Figure 9.  $I_I$

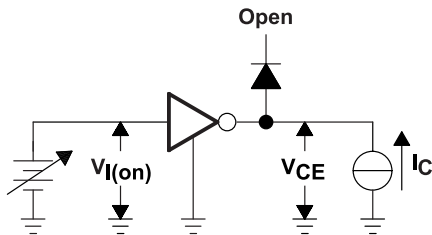


Figure 10.  $V_{I(on)}$

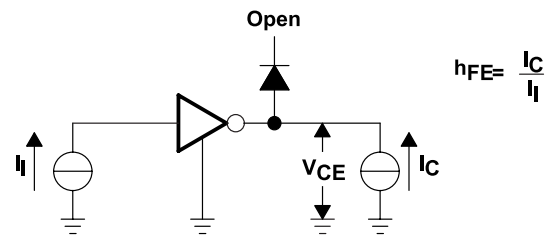


Figure 11.  $h_{FE}$ ,  $V_{CE(sat)}$




Figure 12.  $I_R$


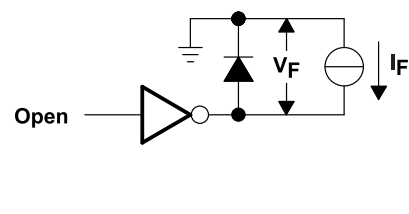



Figure 13.  $V_F$

### Parameter Measurement Information (continued)

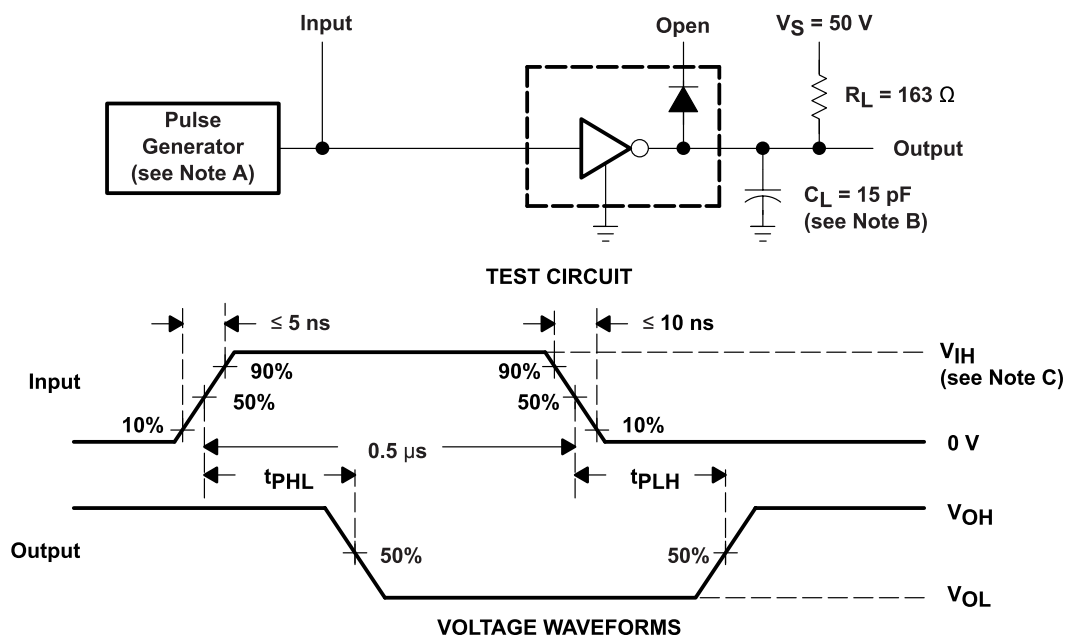

- A. The pulse generator has the following characteristics: PRR = 12.5 kHz,  $Z_O = 50 \Omega$ .
- B.  $C_L$  includes probe and jig capacitance.
- C. For testing the '468,  $V_{IH} = 3 \text{ V}$ ; for the '469,  $V_{IH} = 8 \text{ V}$ .

**Figure 14. Test Circuit and Voltage Waveforms**

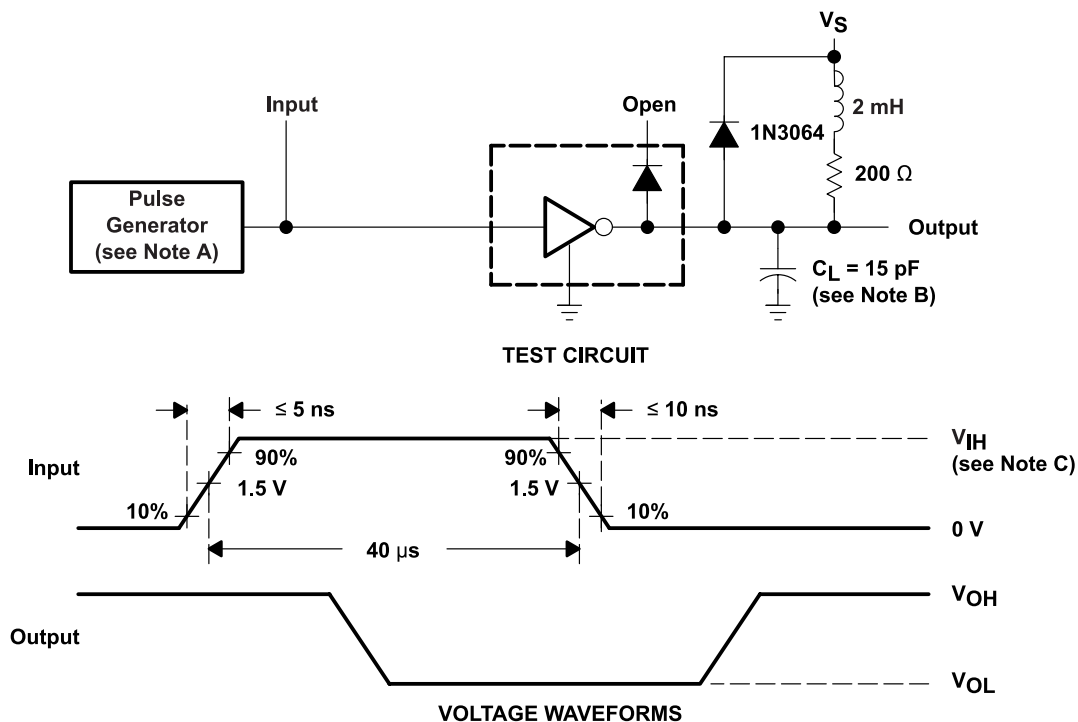

- A. The pulse generator has the following characteristics: PRR = 12.5 kHz,  $Z_O = 50 \Omega$ .
- B.  $C_L$  includes probe and jig capacitance.
- C. For testing the '468,  $V_{IH} = 3 \text{ V}$ ; for the '469,  $V_{IH} = 8 \text{ V}$ .

**Figure 15. Latch-Up Test Circuit and Voltage Waveforms**



## 9 Detailed Description


### 9.1 Overview

This standard device has proven ubiquity and versatility across a wide range of applications. This is due to its integration of 7 Darlington transistors that are capable of sinking up to 500 mA and wide GPIO range capability.

The SN75468 comprises seven high voltage, high current NPN Darlington transistor pairs. All units feature a common emitter and open collector outputs. To maximize their effectiveness, these units contain suppression diodes for inductive loads. The SN75468 has a series base resistor to each Darlington pair, thus allowing operation directly with TTL or CMOS operating at supply voltages of 5.0 V or 3.3 V. The SN75468 offers solutions to a great many interface needs, including solenoids, relays, lamps, small motors, and LEDs. Applications requiring sink currents beyond the capability of a single output may be accommodated by paralleling the outputs.

This device can operate over a wide temperature range (–40°C to 105°C).

### 9.2 Functional Block Diagram

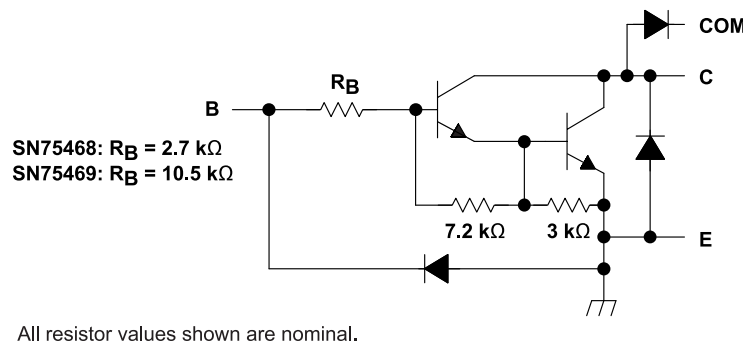

### 9.3 Feature Description

Each channel of SN75468 consists of Darlington connected NPN transistors. This connection creates the effect of a single transistor with a very high current gain ( $\beta^2$ ). This can be as high as 10,000 A/A at certain currents. The very high  $\beta$  allows for high output current drive with a very low input current, essentially equating to operation with low GPIO voltages.

The GPIO voltage is converted to base current via the 2.7 kΩ resistor connected between the input and base of the pre-driver Darlington NPN. The 7.2 kΩ & 3.0 kΩ resistors connected between the base and emitter of each respective NPN act as pull-downs and suppress the amount of leakage that may occur from the input.

The diodes connected between the output and COM pin is used to suppress the kick-back voltage from an inductive load that is excited when the NPN drivers are turned off (stop sinking) and the stored energy in the coils causes a reverse current to flow into the coil supply via the kick-back diode.

In normal operation the diodes on base and collector pins to emitter will be reversed biased. If these diode are forward biased, internal parasitic NPN transistors will draw (a nearly equal) current from other (nearby) device pins.

### 9.4 Device Functional Modes

#### 9.4.1 Inductive Load Drive

When the COM pin is tied to the coil supply voltage, SN75468 is able to drive inductive loads and suppress the kick-back voltage via the internal free wheeling diodes.

#### 9.4.2 Resistive Load Drive

When driving a resistive load, a pull-up resistor is needed in order for SN75468 to sink current and for there to be a logic high level. The COM pin can be left floating for these applications.

## 10 Application and Implementation


### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 10.1 Application Information

SN75468 will typically be used to drive a high voltage and/or current peripheral from an MCU or logic device that cannot tolerate these conditions. The following design is a common application of SN75468, driving inductive loads. This includes motors, solenoids & relays. Each load type can be modeled by what's seen in [Figure 16](#).

### 10.2 Typical Application

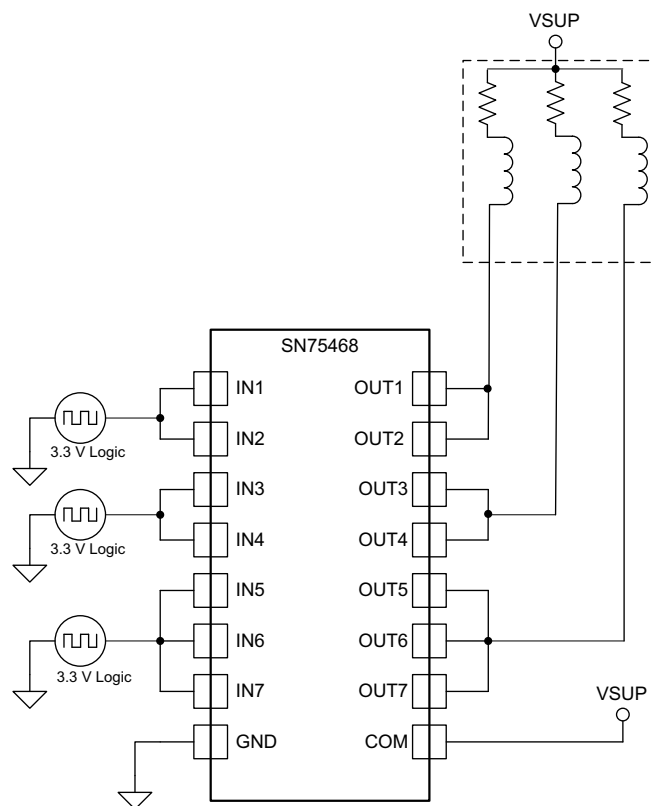

**Figure 16. SN75468 as Inductive Load Driver**

#### 10.2.1 Design Requirements

For this design example, use the parameters listed in [Table 1](#) as the input parameters.

**Table 1. Design Parameters**

| DESIGN PARAMETER              | EXAMPLE VALUE               |
|-------------------------------|-----------------------------|
| GPIO Voltage                  | 3.3 V or 5.0 V              |
| Coil Supply Voltage           | 12 V to 100 V               |
| Number of Channels            | 7                           |
| Output Current ( $R_{COIL}$ ) | 20 mA to 300 mA per channel |
| Duty Cycle                    | 100%                        |

## 10.2.2 Detailed Design Procedure

When using SN75468 in a coil driving application, determine the following:

- Input voltage range
- Temperature range
- Output and drive current
- Power dissipation

### 10.2.2.1 Drive Current

The coil current is determined by the coil voltage ( $V_{SUP}$ ), coil resistance & output low voltage ( $V_{OL}$  or  $V_{CE(SAT)}$ ).

$$I_{COIL} = (V_{SUP} - V_{CE(SAT)}) / R_{COIL} \quad (1)$$

### 10.2.2.2 Output Low Voltage

The output low voltage ( $V_{OL}$ ) is the same thing as  $V_{CE(SAT)}$  and can be determined by the [Electrical Characteristics](#) table, [Figure 1](#), or [Figure 2](#).

### 10.2.2.3 Power Dissipation & Temperature

The number of coils driven is dependent on the coil current and on-chip power dissipation. The number of coils driven can be determined by [Figure 4](#) or [Figure 5](#).

For a more accurate determination of number of coils possible, use the below equation to calculate SN75468 on-chip power dissipation  $P_D$ :

$$P_D = \sum_{i=1}^N V_{OLi} \times I_{Li}$$

Where:

$N$  is the number of channels active together.

$V_{OLi}$  is the  $OUT_i$  pin voltage for the load current  $I_{Li}$ . This is the same as  $V_{CE(SAT)}$  (2)

In order to guarantee reliability of SN75468 and the system the on-chip power dissipation must be lower than or equal to the maximum allowable power dissipation ( $PD_{(MAX)}$ ) dictated by below equation [Equation 3](#).

$$PD_{(MAX)} = \frac{(T_{J(MAX)} - T_A)}{\theta_{JA}}$$

Where:

$T_{J(MAX)}$  is the target maximum junction temperature.


$T_A$  is the operating ambient temperature.

$\theta_{JA}$  is the package junction to ambient thermal resistance. (3)


It is recommended to limit SN75468 IC's die junction temperature to less than 125°C. The IC junction temperature is directly proportional to the on-chip power dissipation.

### 10.2.3 Application Curves

The following curves were generated with SN75468 driving an OMRON G5NB relay –  $V_{in} = 5.0V$ ;  $V_{sup} = 12V$  &  $R_{COIL} = 2.8k\Omega$

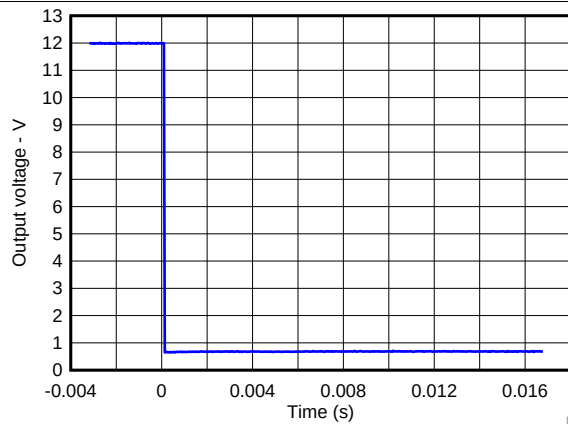


**Figure 17. Output Response With Activation of Coil (Turn On)**

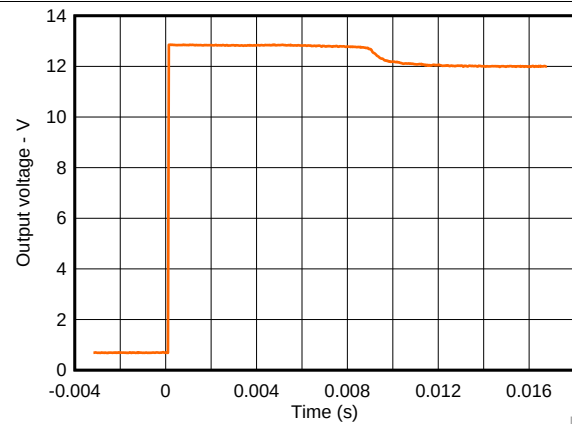


**Figure 18. Output Response With De-activation of Coil (Turn Off)**

### 10.3 System Examples

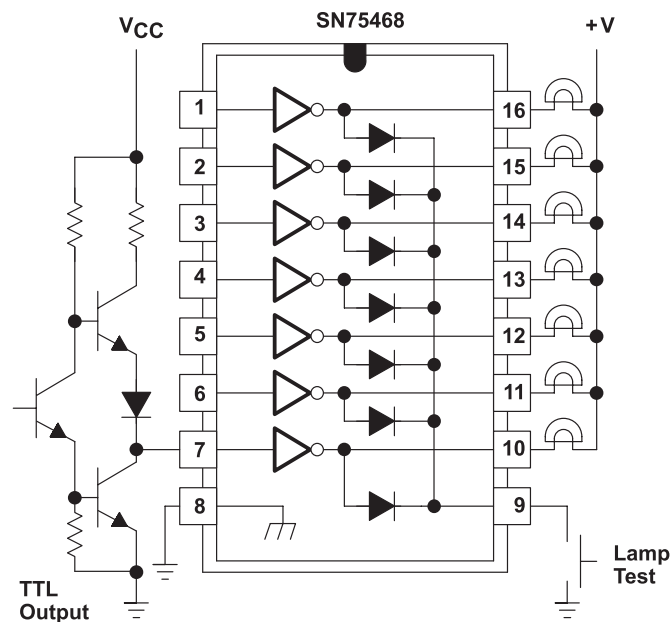


**Figure 19. TTL to Load Schematic**

## System Examples (continued)

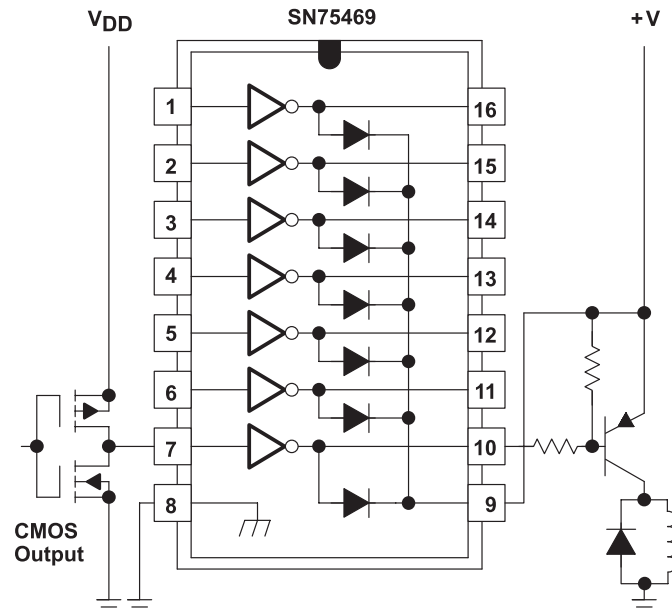

**Figure 20. Buffer to Higher Current Loads Schematic**

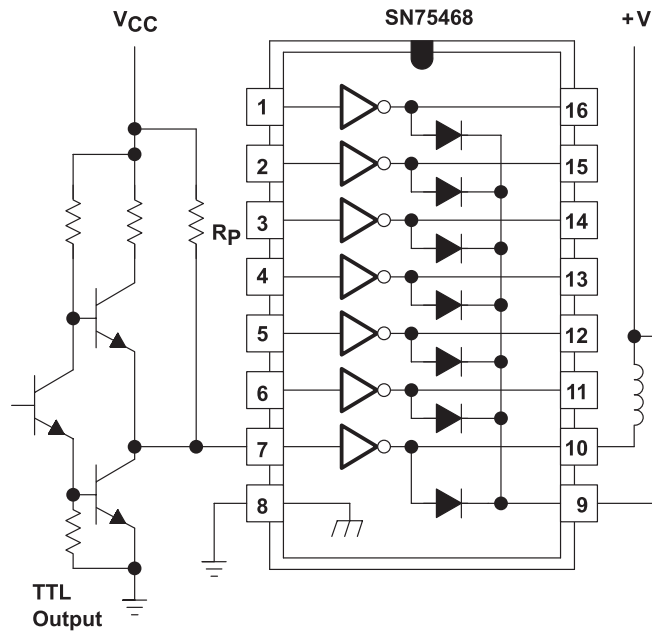

**Figure 21. Pull-up Resistor Schematic**

## 11 Power Supply Recommendations

This part does not need a power supply; however, the COM pin is typically tied to the system power supply. When this is the case, it is very important to make sure that the output voltage does not heavily exceed the COM pin voltage. This will heavily forward bias the fly-back diodes and cause a large current to flow into COM, potentially damaging the on-chip metal or over-heating the part.


## 12 Layout

### 12.1 Layout Guidelines

Thin traces can be used on the input due to the low current logic that is typically used to drive SN75468. Care must be taken to separate the input channels as much as possible, as to eliminate cross-talk. Thick traces are recommended for the output, in order to drive whatever high currents that may be needed. Wire thickness can be determined by the trace material's current density and desired drive current.

Since all of the channels currents return to a common emitter, it is best to size that trace width to be very wide. Some applications require up to 2.5 A.

### 12.2 Layout Example

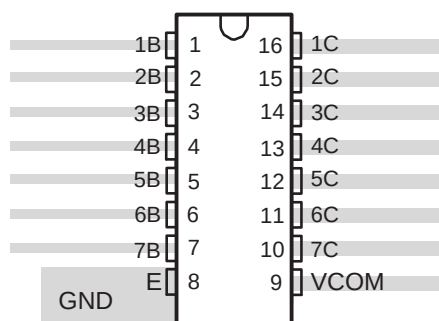

**Figure 22. Package Layout**

## 13 Device and Documentation Support

### 13.1 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

**Table 2. Related Links**

| PARTS   | PRODUCT FOLDER             | SAMPLE & BUY               | TECHNICAL DOCUMENTS        | TOOLS & SOFTWARE           | SUPPORT & COMMUNITY        |
|---------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| SN75468 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| SN75469 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |

### 13.2 Trademarks

All trademarks are the property of their respective owners.

### 13.3 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 13.4 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number      | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|----------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">SN75468D</a>   | Active        | Production           | SOIC (D)   16  | 40   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | SN75468             |
| SN75468D.A                 | Active        | Production           | SOIC (D)   16  | 40   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | SN75468             |
| SN75468DE4                 | Active        | Production           | SOIC (D)   16  | 40   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | SN75468             |
| <a href="#">SN75468DR</a>  | Active        | Production           | SOIC (D)   16  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | SN75468             |
| SN75468DR.A                | Active        | Production           | SOIC (D)   16  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | SN75468             |
| <a href="#">SN75468N</a>   | Active        | Production           | PDIP (N)   16  | 25   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | SN75468N            |
| SN75468N.A                 | Active        | Production           | PDIP (N)   16  | 25   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | SN75468N            |
| SN75468NE4                 | Active        | Production           | PDIP (N)   16  | 25   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | SN75468N            |
| <a href="#">SN75468NSR</a> | Active        | Production           | SOP (NS)   16  | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | SN75468             |
| SN75468NSR.A               | Active        | Production           | SOP (NS)   16  | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | SN75468             |
| SN75468NSRG4               | Active        | Production           | SOP (NS)   16  | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | SN75468             |
| <a href="#">SN75469D</a>   | Active        | Production           | SOIC (D)   16  | 40   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | SN75469             |
| SN75469D.A                 | Active        | Production           | SOIC (D)   16  | 40   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | SN75469             |
| SN75469DE4                 | Active        | Production           | SOIC (D)   16  | 40   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | SN75469             |
| <a href="#">SN75469DR</a>  | Active        | Production           | SOIC (D)   16  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | SN75469             |
| SN75469DR.A                | Active        | Production           | SOIC (D)   16  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | SN75469             |
| <a href="#">SN75469N</a>   | Active        | Production           | PDIP (N)   16  | 25   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | SN75469N            |
| SN75469N.A                 | Active        | Production           | PDIP (N)   16  | 25   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | SN75469N            |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.



<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN75468NSR | SOP          | NS              | 16   | 2000 | 330.0              | 16.4               | 8.1     | 10.4    | 2.5     | 12.0    | 16.0   | Q1            |
| SN75469DR  | SOIC         | D               | 16   | 2500 | 330.0              | 16.4               | 6.5     | 10.3    | 2.1     | 8.0     | 16.0   | Q1            |


## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN75468NSR | SOP          | NS              | 16   | 2000 | 356.0       | 356.0      | 35.0        |
| SN75469DR  | SOIC         | D               | 16   | 2500 | 340.5       | 336.1      | 32.0        |

## TUBE

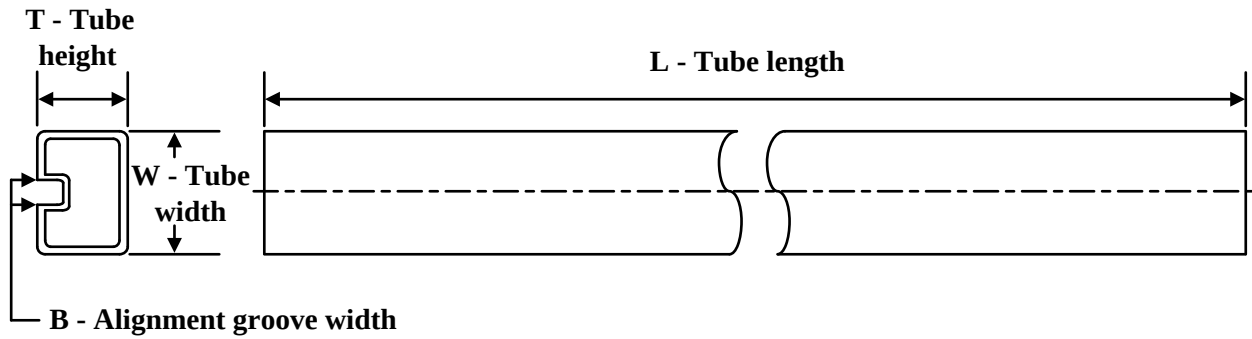


\*All dimensions are nominal

| Device     | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| SN75468D   | D            | SOIC         | 16   | 40  | 507    | 8      | 3940   | 4.32   |
| SN75468D.A | D            | SOIC         | 16   | 40  | 507    | 8      | 3940   | 4.32   |
| SN75468DE4 | D            | SOIC         | 16   | 40  | 507    | 8      | 3940   | 4.32   |
| SN75468N   | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN75468N   | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN75468N.A | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN75468N.A | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN75468NE4 | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN75468NE4 | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN75469D   | D            | SOIC         | 16   | 40  | 507    | 8      | 3940   | 4.32   |
| SN75469D.A | D            | SOIC         | 16   | 40  | 507    | 8      | 3940   | 4.32   |
| SN75469DE4 | D            | SOIC         | 16   | 40  | 507    | 8      | 3940   | 4.32   |
| SN75469N   | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN75469N.A | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |

D (R-PDSO-G16)

PLASTIC SMALL OUTLINE

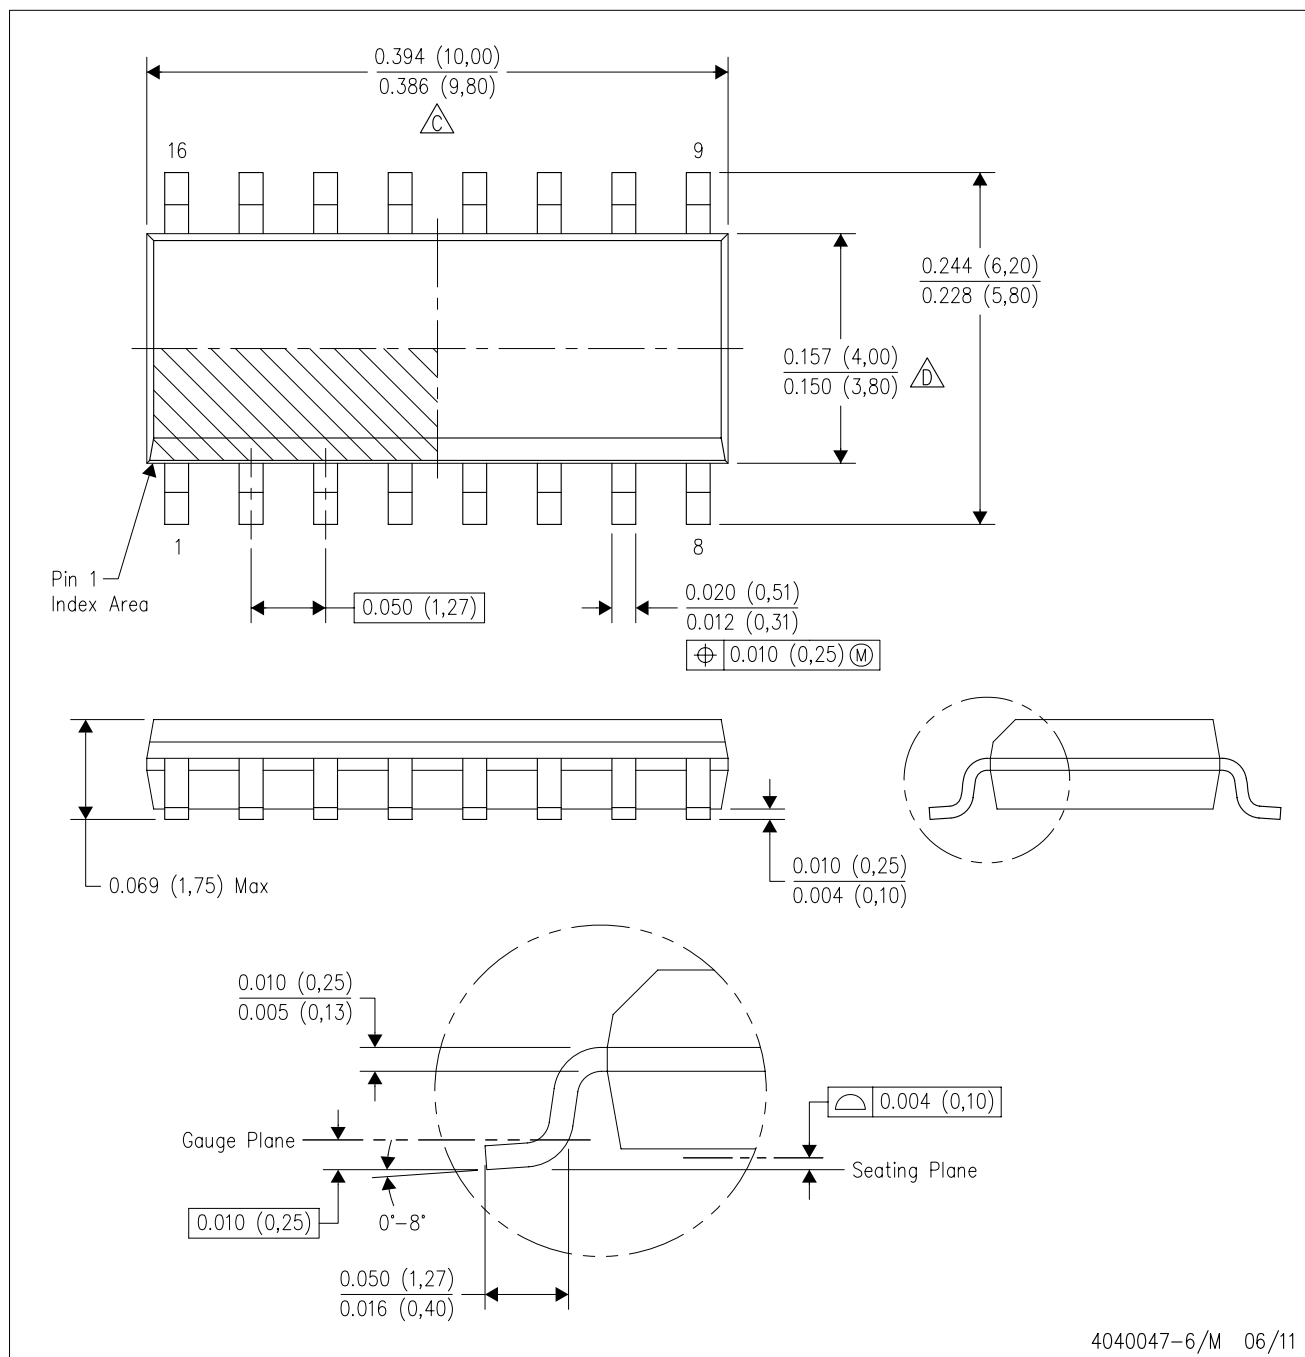

4040047-6/M 06/11


- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
  - E. Reference JEDEC MS-012 variation AC.

# MECHANICAL DATA

NS (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE

14-PINS SHOWN

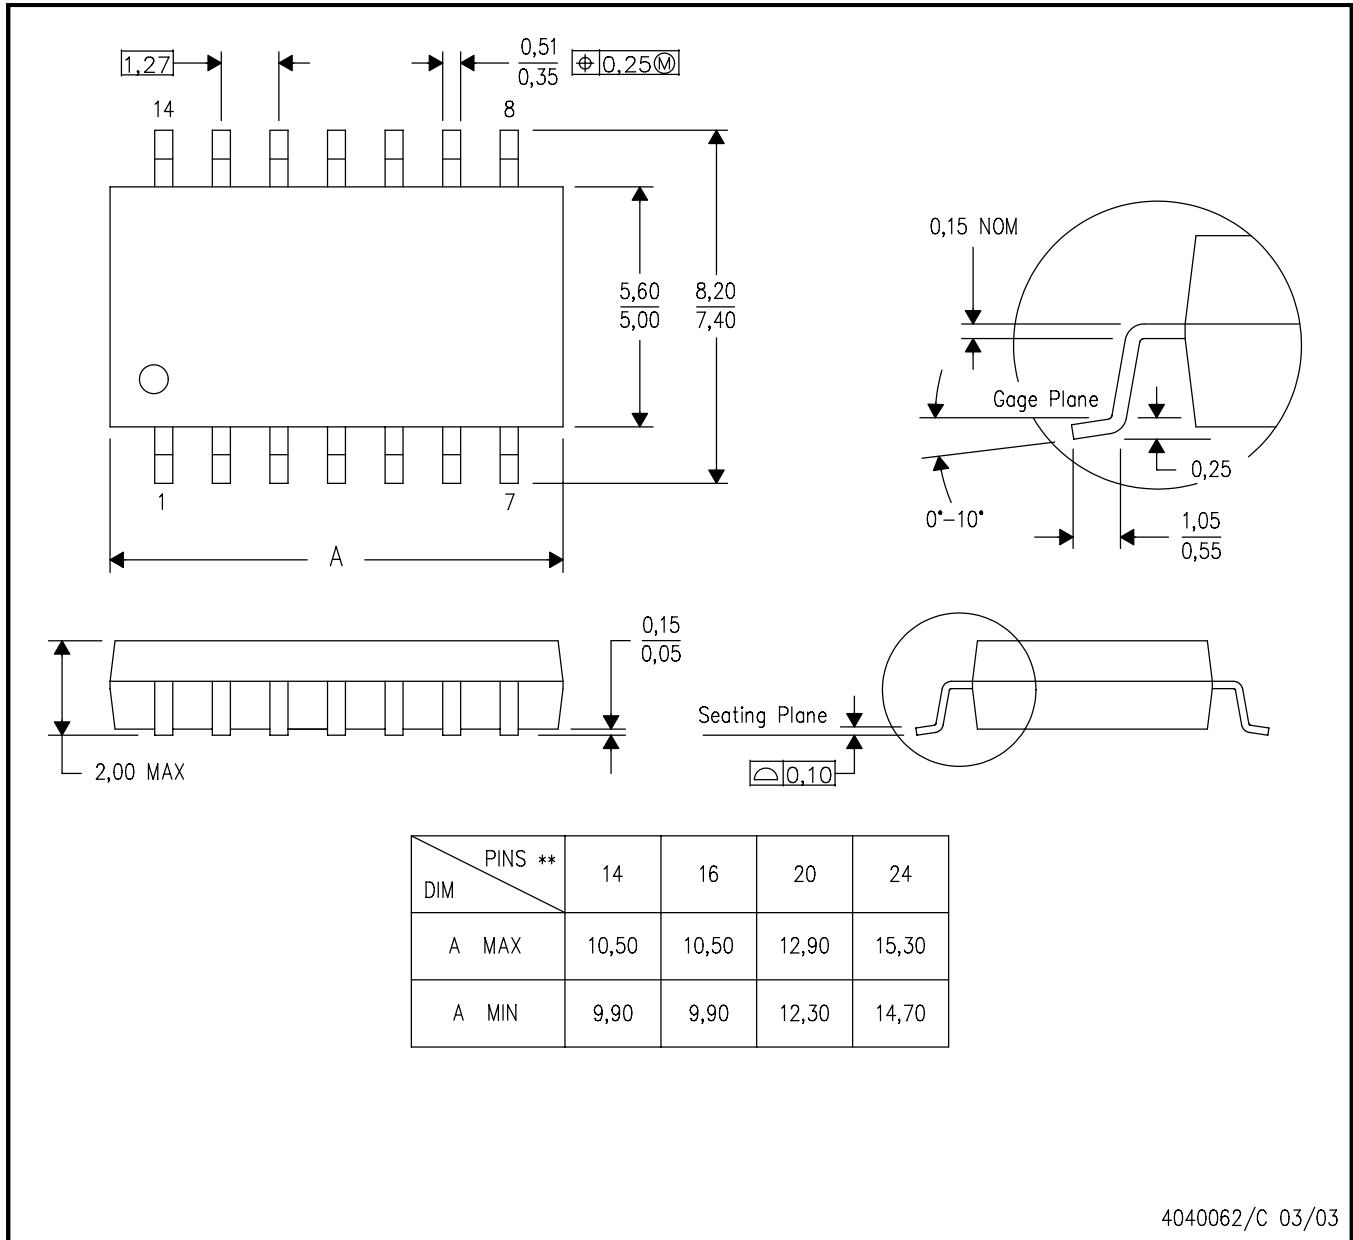


- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.


N (R-PDIP-T\*\*)

16 PINS SHOWN

## PLASTIC DUAL-IN-LINE PACKAGE

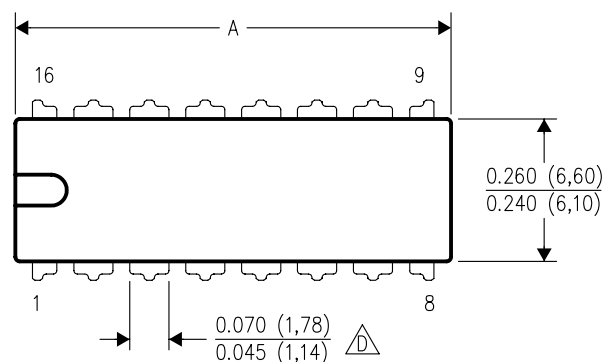

| PINS **<br>DIM      | 14               | 16               | 18               | 20               |
|---------------------|------------------|------------------|------------------|------------------|
| A MAX               | 0.775<br>(19,69) | 0.775<br>(19,69) | 0.920<br>(23,37) | 1.060<br>(26,92) |
| A MIN               | 0.745<br>(18,92) | 0.745<br>(18,92) | 0.850<br>(21,59) | 0.940<br>(23,88) |
| MS-001<br>VARIATION | AA               | BB               | AC               | AD               |

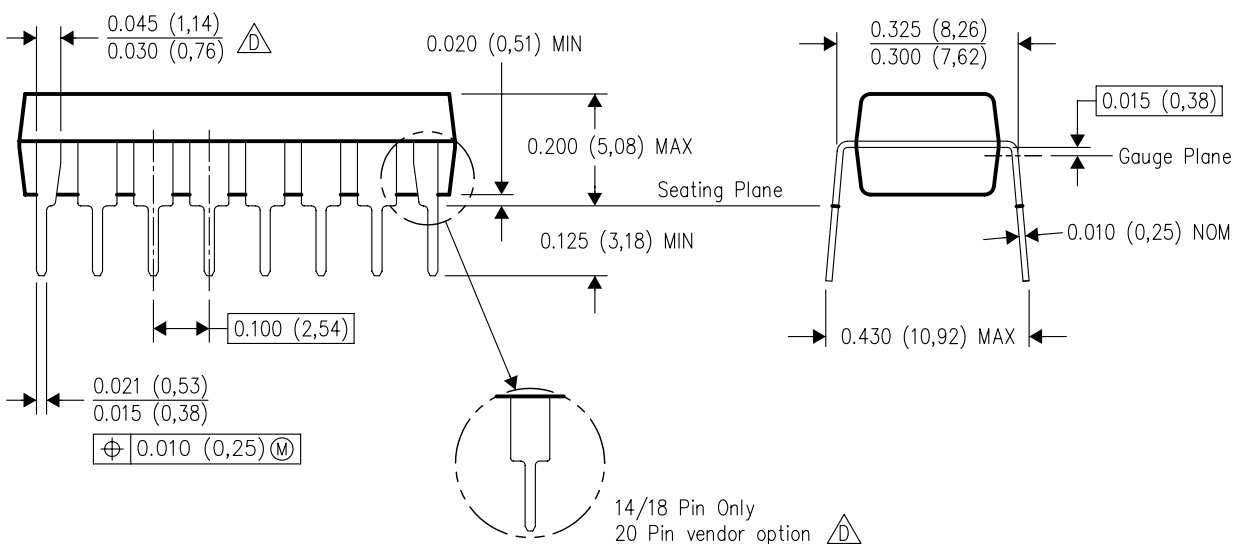

4040049/E 12/2002

NOTES:

- A. All linear dimensions are in inches (millimeters).  
B. This drawing is subject to change without notice.
-  Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).  
 The 20 pin end lead shoulder width is a vendor option, either half or full width.



**SOP - 2.00 mm max height**

SOP

**NS0016A**



1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm, per side.







## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated