

## LM2734-Q1 Thin SOT 1-A Load Step-Down DC/DC Regulator

### 1 Features

- AEC-Q100 Qualified for Automotive Applications:
  - Device Temperature Grade 1: -40°C to +125°C, T<sub>A</sub>
- Thin SOT-6 Package
- 3-V to 20-V Input Voltage Range
- 0.8-V to 18-V Output Voltage Range
- 1-A Output Current
- 550-kHz (LM2734Y) and 1.6-MHz (LM2734X) Switching Frequencies
- 300-mΩ NMOS Switch
- 30-nA Shutdown Current
- 0.8-V, 2% Internal Voltage Reference
- Internal Soft Start
- Current-Mode, PWM Operation
- Thermal Shutdown
- Create a Custom Design Using the LM2734-Q1 With [WEBENCH® Power Designer](#)

### 2 Applications

- Automotive
- Local Point-of-Load Regulation
- Advanced Driver Assistance Systems (ADAS)

### 3 Description

The LM2734-Q1 regulator is a monolithic, high-frequency, PWM step-down DC/DC converter in a 6-pin Thin SOT package. The device provides all the active functions to provide local DC/DC conversion with fast transient response and accurate regulation in the smallest possible PCB area.

With a minimum of external components and online design support through WEBENCH, the LM2734-Q1 regulator is easy to use. The ability to drive 1-A loads with an internal 300-mΩ NMOS switch using state-of-the-art 0.5-μm BiCMOS technology results in the best power density available. The world-class control circuitry allows for on-times as low as 13 ns, thus supporting exceptionally high-frequency conversion over the entire 3-V to 20-V input operating range down to the minimum output voltage of 0.8 V. Switching frequency is internally set to 550 kHz (LM2734Y) or 1.6 MHz (LM2734X), allowing the use of extremely small surface-mount inductors and chip capacitors. Even though the operating frequencies are very high, efficiencies up to 90% are easy to achieve. External shutdown is included, featuring an ultra-low standby current of 30 nA.


The LM2734-Q1 regulator uses current-mode control and internal compensation to provide high-performance regulation over a wide range of operating conditions. Additional features include internal soft-start circuitry to reduce inrush current, pulse-by-pulse current limit, thermal shutdown, and output overvoltage protection.

#### Device Information<sup>(1)</sup>


| PART NUMBER | PACKAGE | BODY SIZE (NOM)   |
|-------------|---------|-------------------|
| LM2734-Q1   | SOT (6) | 2.90 mm × 1.60 mm |

(1) For all available packages, see the orderable addendum at the end of the datasheet.

#### Typical Application Circuit

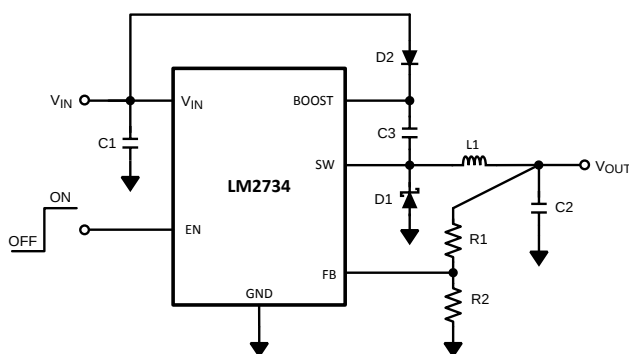

#### Efficiency vs Load Current V<sub>IN</sub> = 5 V, V<sub>OUT</sub> = 3.3 V

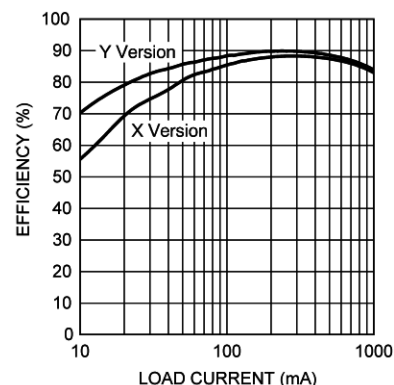

## Table of Contents


|                                                |          |                                                      |           |
|------------------------------------------------|----------|------------------------------------------------------|-----------|
| <b>1 Features</b> .....                        | <b>1</b> | <b>8 Application and Implementation</b> .....        | <b>11</b> |
| <b>2 Applications</b> .....                    | <b>1</b> | 8.1 Application Information.....                     | 11        |
| <b>3 Description</b> .....                     | <b>1</b> | 8.2 Typical Applications .....                       | 14        |
| <b>4 Revision History</b> .....                | <b>2</b> | <b>9 Power Supply Recommendations</b> .....          | <b>29</b> |
| <b>5 Pin Configuration and Functions</b> ..... | <b>3</b> | <b>10 Layout</b> .....                               | <b>29</b> |
| <b>6 Specifications</b> .....                  | <b>4</b> | 10.1 Layout Guidelines .....                         | 29        |
| 6.1 Absolute Maximum Ratings .....             | 4        | 10.2 Layout Example .....                            | 30        |
| 6.2 ESD Ratings.....                           | 4        | <b>11 Device and Documentation Support</b> .....     | <b>31</b> |
| 6.3 Recommended Operating Conditions.....      | 4        | 11.1 Development Support .....                       | 31        |
| 6.4 Thermal Information .....                  | 4        | 11.2 Receiving Notification of Documentation Updates | 31        |
| 6.5 Electrical Characteristics.....            | 5        | 11.3 Community Resources.....                        | 31        |
| 6.6 Typical Characteristics .....              | 6        | 11.4 Third-Party Products Disclaimer .....           | 31        |
| <b>7 Detailed Description</b> .....            | <b>8</b> | 11.5 Trademarks .....                                | 31        |
| 7.1 Overview .....                             | 8        | 11.6 Electrostatic Discharge Caution.....            | 31        |
| 7.2 Functional Block Diagram .....             | 9        | 11.7 Glossary .....                                  | 32        |
| 7.3 Feature Description.....                   | 9        | <b>12 Mechanical, Packaging, and Orderable</b>       |           |
| 7.4 Device Functional Modes.....               | 10       | <b>Information</b> .....                             | <b>32</b> |

## 4 Revision History

| DATE           | REVISION | NOTES                                                                                                                                                                         |
|----------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| September 2018 | *        | Split out LM2734-Q1 from the combined data sheet SNVS288 commercial and automotive data sheet started September 2004. This document SNVSB80 details the automotive LM2734-Q1. |
|                |          | Changed <i>Abs Max</i> FB voltage max. from "-0.3 V" to "3 V"                                                                                                                 |

## 5 Pin Configuration and Functions

**DDC Package  
6-Pin SOT-23-THIN  
Top View**



**Pin Functions**

| PIN      |     | I/O | DESCRIPTION                                                                                                                              |
|----------|-----|-----|------------------------------------------------------------------------------------------------------------------------------------------|
| NAME     | NO. |     |                                                                                                                                          |
| BOOST    | 1   | I   | Boost voltage that drives the internal NMOS control switch. A bootstrap capacitor is connected between the BOOST and SW pins.            |
| GND      | 2   | GND | Signal and Power ground pin. Place the bottom resistor of the feedback network as close as possible to this pin for accurate regulation. |
| FB       | 3   | I   | Feedback pin. Connect FB to the external resistor divider to set output voltage.                                                         |
| EN       | 4   | I   | Enable control input. Logic high enables operation. Do not allow this pin to float or be greater than $V_{IN} + 0.3\text{ V}$ .          |
| $V_{IN}$ | 5   | I   | Input supply voltage. Connect a bypass capacitor to this pin.                                                                            |
| SW       | 6   | O   | Output switch. Connects to the inductor, catch diode, and bootstrap capacitor.                                                           |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature (unless otherwise noted)<sup>(1)(2)</sup>

|                                                   | MIN  | MAX                   | UNIT |
|---------------------------------------------------|------|-----------------------|------|
| V <sub>IN</sub>                                   | –0.5 | 24                    | V    |
| SW voltage                                        | –0.5 | 24                    | V    |
| Boost voltage                                     | –0.5 | 30                    | V    |
| Boost to SW voltage                               | –0.5 | 6                     | V    |
| FB voltage                                        | –0.5 | 3                     | V    |
| EN voltage                                        | –0.5 | V <sub>IN</sub> + 0.3 | V    |
| Junction temperature                              |      | 150                   | °C   |
| Soldering information reflow peak pkg. temp.(15s) |      | 260                   | °C   |
| Storage temperature, T <sub>stg</sub>             | –65  | 150                   | °C   |

- Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- If Military/Aerospace specified devices are required, contact the Texas Instruments Sales Office/ Distributors for availability and specifications.

### 6.2 ESD Ratings

|                                            |                                                                                           | VALUE | UNIT |
|--------------------------------------------|-------------------------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> Electrostatic discharge | Human-body model (HBM), per AEC Q100-002 <sup>(1)</sup><br>HBM ESD Classification Level 2 | ±2000 | V    |
|                                            | Charged-device model (CDM), per AEC Q100-011<br>CDM ESD Classification Level C6           | ±1000 |      |

- AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                      | MIN  | NOM | MAX | UNIT |
|----------------------|------|-----|-----|------|
| V <sub>IN</sub>      | 3    |     | 20  | V    |
| SW voltage           | –0.5 |     | 20  | V    |
| Boost voltage        | –0.5 |     | 25  | V    |
| Boost to SW voltage  | 1.6  |     | 5.5 | V    |
| Junction temperature | –40  |     | 125 | °C   |

### 6.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | LM2734-Q1         | UNIT |
|-------------------------------|----------------------------------------------|-------------------|------|
|                               |                                              | DDC (SOT-23-THIN) |      |
|                               |                                              | 6 PINS            |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 158.1             | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 46.5              | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 29.5              | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 0.8               | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 29.2              | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | n/a               | °C/W |

- For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Electrical Characteristics

$V_{IN} = 5V$ ,  $V_{BOOST} - V_{SW} = 5V$  unless otherwise specified. Datasheet min/max specification limits are ensured by design, test, or statistical analysis.


| PARAMETER                          |                                  | TEST CONDITIONS                           | T <sub>J</sub> = 25°C |                    |                    | T <sub>J</sub> = -40°C to 125°C  |     |     | UNIT  |
|------------------------------------|----------------------------------|-------------------------------------------|-----------------------|--------------------|--------------------|----------------------------------|-----|-----|-------|
|                                    |                                  |                                           | MIN <sup>(1)</sup>    | TYP <sup>(2)</sup> | MAX <sup>(1)</sup> | MIN                              | TYP | MAX |       |
| V <sub>FB</sub>                    | Feedback Voltage                 |                                           | 0.800                 |                    |                    | 0.784                      0.816 |     |     | V     |
| ΔV <sub>FB</sub> /ΔV <sub>IN</sub> | Feedback Voltage Line Regulation | V <sub>IN</sub> = 3V to 20V               | 0.01                  |                    |                    |                                  |     |     | % / V |
| I <sub>FB</sub>                    | Feedback Input Bias Current      | Sink/Source                               | 10                    |                    |                    | 250                              |     |     | nA    |
| UVLO                               | Undervoltage Lockout             | V <sub>IN</sub> Rising                    | 2.74                  |                    |                    | 2.90                             |     |     | V     |
|                                    | Undervoltage Lockout             | V <sub>IN</sub> Falling                   | 2.3                   |                    |                    | 2                                |     |     |       |
|                                    | UVLO Hysteresis                  |                                           | 0.44                  |                    |                    | 0.30                      0.62   |     |     |       |
| F <sub>SW</sub>                    | Switching Frequency              | LM2734X                                   | 1.6                   |                    |                    | 1.2                      1.9     |     |     | MHz   |
|                                    |                                  | LM2734Y                                   | 0.55                  |                    |                    | 0.40                      0.66   |     |     |       |
| D <sub>MAX</sub>                   | Maximum Duty Cycle               | LM2734X                                   | 92                    |                    |                    | 85%                              |     |     |       |
|                                    |                                  | LM2734Y                                   | 96                    |                    |                    | 90%                              |     |     |       |
| D <sub>MIN</sub>                   | Minimum Duty Cycle               | LM2734X                                   | 2%                    |                    |                    |                                  |     |     |       |
|                                    |                                  | LM2734Y                                   | 1%                    |                    |                    |                                  |     |     |       |
| R <sub>DS(ON)</sub>                | Switch ON Resistance             | V <sub>BOOST</sub> - V <sub>SW</sub> = 3V | 300                   |                    |                    | 600                              |     |     | mΩ    |
| I <sub>CL</sub>                    | Switch Current Limit             | V <sub>BOOST</sub> - V <sub>SW</sub> = 3V | 1.7                   |                    |                    | 1.2                      2.5     |     |     | A     |
| I <sub>Q</sub>                     | Quiescent Current                | Switching                                 | 1.5                   |                    |                    | 2.5                              |     |     | mA    |
|                                    | Quiescent Current (shutdown)     | V <sub>EN</sub> = 0V                      | 30                    |                    |                    |                                  |     |     | nA    |
| I <sub>BOOST</sub>                 | Boost Pin Current                | LM2734X (50% Duty Cycle)                  | 2.5                   |                    |                    | 3.5                              |     |     | mA    |
|                                    |                                  | LM2734Y (50% Duty Cycle)                  | 1.0                   |                    |                    | 1.8                              |     |     |       |
| V <sub>EN_TH</sub>                 | Shutdown Threshold Voltage       | V <sub>EN</sub> Falling                   |                       |                    |                    | 0.4                              |     |     | V     |
|                                    | Enable Threshold Voltage         | V <sub>EN</sub> Rising                    |                       |                    |                    | 1.8                              |     |     |       |
| I <sub>EN</sub>                    | Enable Pin Current               | Sink/Source                               | 10                    |                    |                    |                                  |     |     | nA    |
| I <sub>SW</sub>                    | Switch Leakage                   |                                           | 40                    |                    |                    |                                  |     |     | nA    |

(1) Specified to Average Outgoing Quality Level (AOQL).


(2) Typicals represent the most likely parametric norm.

## 6.6 Typical Characteristics


All curves taken at  $V_{IN} = 5\text{ V}$ ,  $V_{BOOST} - V_{SW} = 5\text{ V}$  and  $T_A = 25^\circ\text{C}$ , unless specified otherwise.

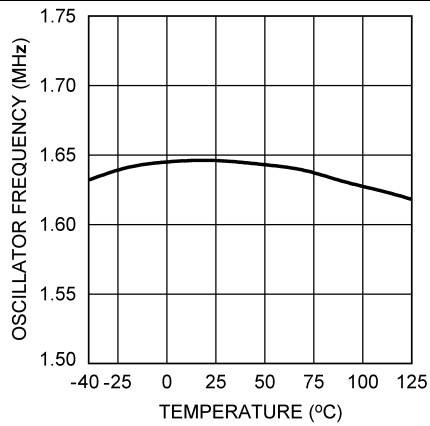


**Figure 1. Oscillator Frequency vs Temperature - L1 = 4.7  $\mu\text{H}$**

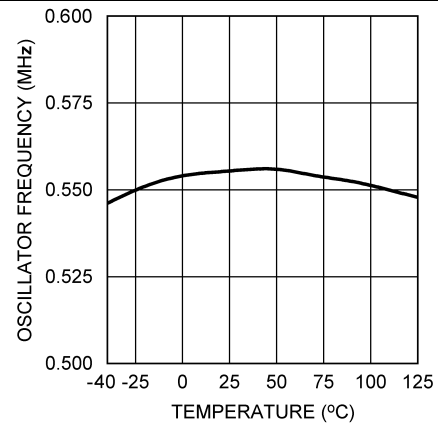


**Figure 2. Oscillator Frequency vs Temperature - L1 = 10  $\mu\text{H}$**

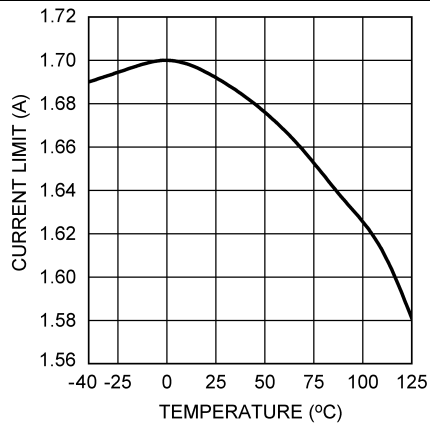


**Figure 3. Current Limit vs Temperature**

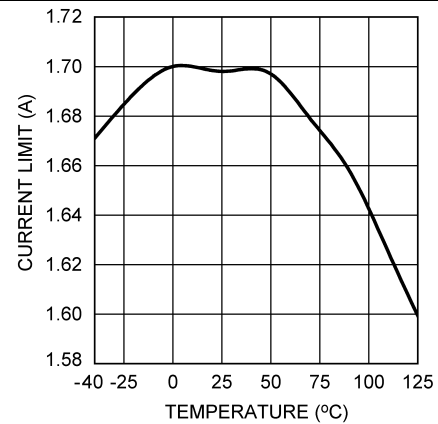

**Figure 4. Current Limit vs Temperature  
 $V_{IN} = 20\text{ V}$**

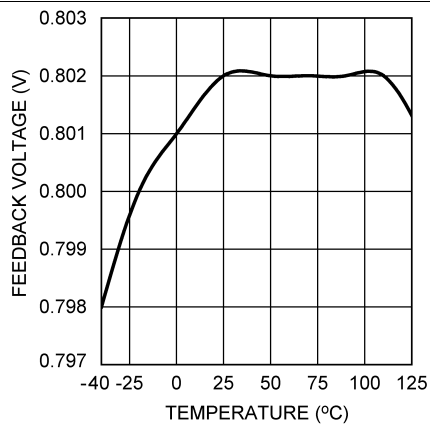


**Figure 5.  $V_{FB}$  vs Temperature**

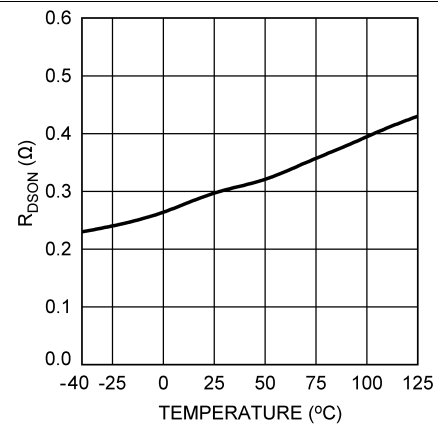


**Figure 6.  $R_{DS(on)}$  vs Temperature**

## Typical Characteristics (continued)


All curves taken at  $V_{IN} = 5\text{ V}$ ,  $V_{BOOST} - V_{SW} = 5\text{ V}$  and  $T_A = 25^\circ\text{C}$ , unless specified otherwise.

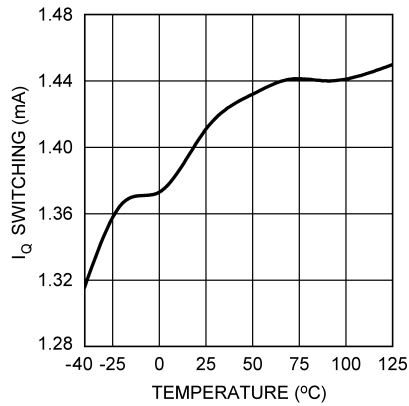


**Figure 7.  $I_Q$  Switching vs Temperature**

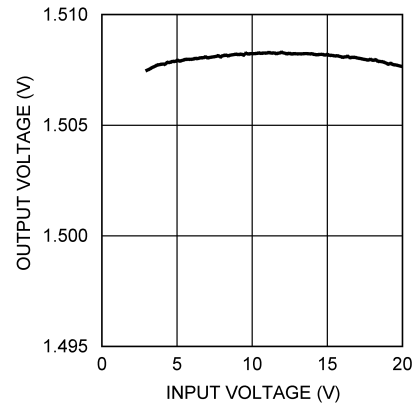


**Figure 8. Line Regulation -  $L1 = 4.7\text{ }\mu\text{H}$   
 $V_{OUT} = 1.5\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$**

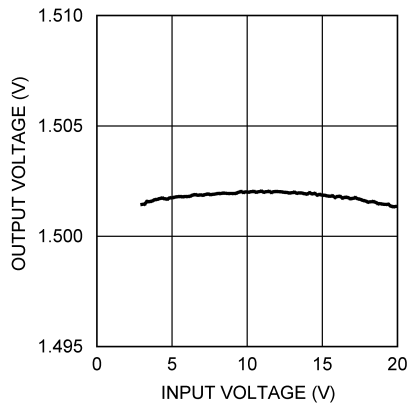

**Figure 9. Line Regulation -  $L1 = 10\text{ }\mu\text{H}$   
 $V_{OUT} = 1.5\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$**

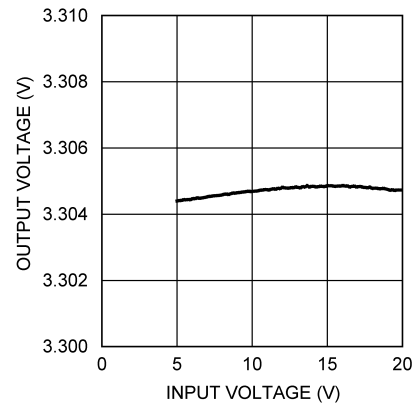

**Figure 10. Line Regulation -  $L1 = 4.7\text{ }\mu\text{H}$   
 $V_{OUT} = 3.3\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$**

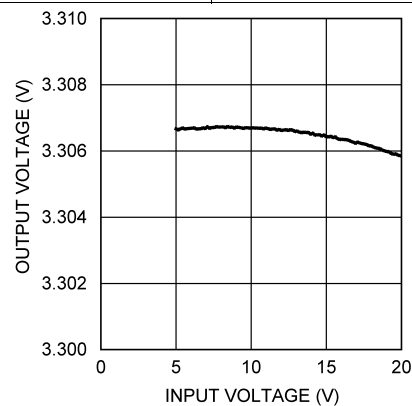


**Figure 11. Line Regulation -  $L1 = 10\text{ }\mu\text{H}$   
 $V_{OUT} = 3.3\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$**

## 7 Detailed Description

### 7.1 Overview


The LM2734-Q1 device is a constant frequency PWM buck regulator IC that delivers a 1-A load current. The regulator has a preset switching frequency of either 550 kHz (LM2734Y) or 1.6 MHz (LM2734X). These high frequencies allow the LM2734-Q1 device to operate with small surface-mount capacitors and inductors, resulting in DC/DC converters that require a minimum amount of board space. The LM2734-Q1 device is internally compensated, so it is simple to use, and requires few external components. The LM2734-Q1 device uses current-mode control to regulate the output voltage.

The following operating description of the LM2734-Q1 device will refer to the Simplified Block Diagram () and to the waveforms in Figure 12. The LM2734-Q1 device supplies a regulated output voltage by switching the internal NMOS control switch at constant frequency and variable duty cycle. A switching cycle begins at the falling edge of the reset pulse generated by the internal oscillator. When this pulse goes low, the output control logic turns on the internal NMOS control switch. During this on-time, the SW pin voltage ( $V_{SW}$ ) swings up to approximately  $V_{IN}$ , and the inductor current ( $I_L$ ) increases with a linear slope.  $I_L$  is measured by the current-sense amplifier, which generates an output proportional to the switch current. The sense signal is summed with the regulator's corrective ramp and compared to the error amplifier's output, which is proportional to the difference between the feedback voltage and  $V_{REF}$ . When the PWM comparator output goes high, the output switch turns off until the next switching cycle begins. During the switch off-time, inductor current discharges through Schottky diode D1, which forces the SW pin to swing below ground by the forward voltage ( $V_D$ ) of the catch diode. The regulator loop adjusts the duty cycle ( $D$ ) to maintain a constant output voltage.

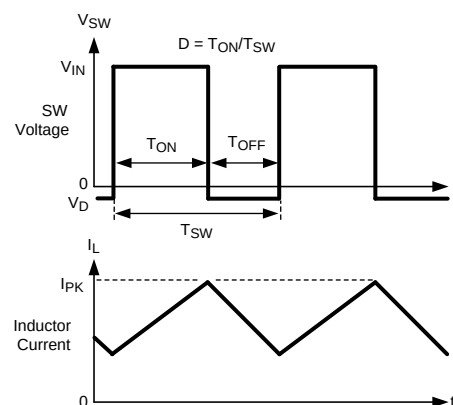

**Figure 12. LM2734-Q1 Waveforms of SW Pin Voltage and Inductor Current**

## 7.2 Functional Block Diagram

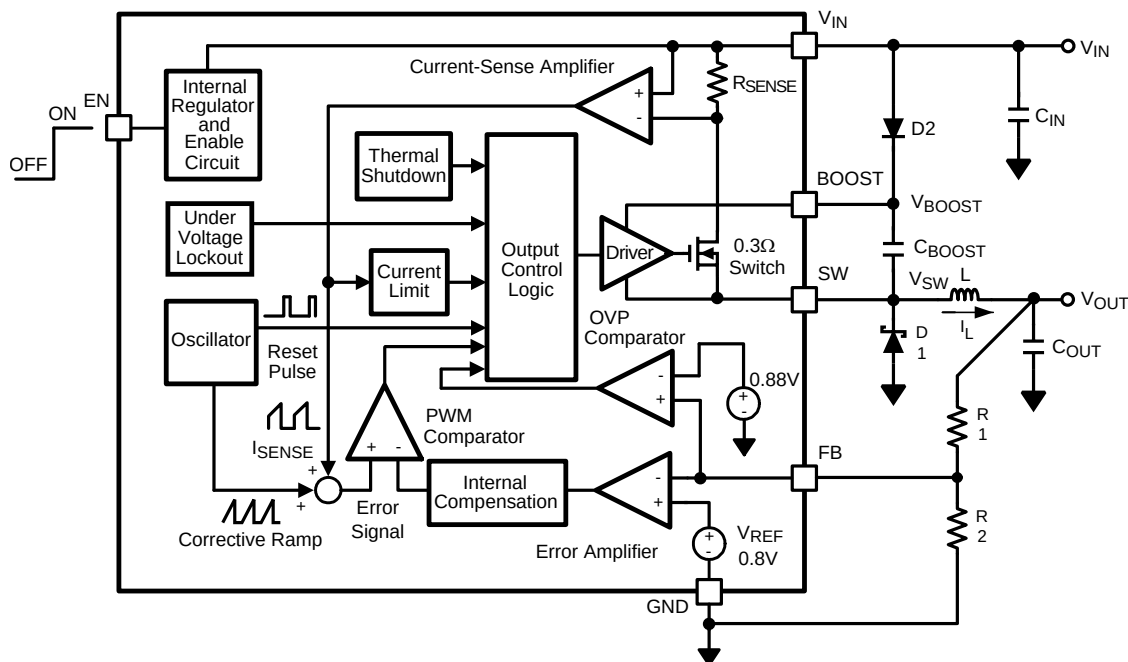

## 7.3 Feature Description

### 7.3.1 Output Overvoltage Protection

The overvoltage comparator compares the FB pin voltage to a voltage that is 10% higher than the internal reference  $V_{ref}$ . Once the FB pin voltage goes 10% above the internal reference, the internal NMOS control switch is turned off, which allows the output voltage to decrease toward regulation.

### 7.3.2 Undervoltage Lockout

Undervoltage lockout (UVLO) prevents the LM2734-Q1 from operating until the input voltage exceeds 2.74 V (typical).

The UVLO threshold has approximately 440 mV of hysteresis, so the part will operate until  $V_{IN}$  drops below 2.3 V (typical). Hysteresis prevents the part from turning off during power up if  $V_{IN}$  is nonmonotonic.

### 7.3.3 Current Limit

The LM2734-Q1 uses cycle-by-cycle current limiting to protect the output switch. During each switching cycle, a current limit comparator detects if the output switch current exceeds 1.7 A (typical), and turns off the switch until the next switching cycle begins.

### 7.3.4 Thermal Shutdown

Thermal shutdown limits total power dissipation by turning off the output switch when the IC junction temperature exceeds 165°C. After thermal shutdown occurs, the output switch does not turn on until the junction temperature drops to approximately 150°C.

## 7.4 Device Functional Modes

### 7.4.1 Enable Pin / Shutdown Mode

The LM2734-Q1 has a shutdown mode that is controlled by the enable pin (EN). When a logic low voltage is applied to EN, the part is in shutdown mode and its quiescent current drops to typically 30 nA. Switch leakage adds another 40 nA from the input supply. The voltage at this pin must never exceed  $V_{IN} + 0.3$  V.

### 7.4.2 Soft Start

This function forces  $V_{OUT}$  to increase at a controlled rate during start up. During soft start, the error amplifier's reference voltage ramps from 0 V to its nominal value of 0.8 V in approximately 200  $\mu$ s. This forces the regulator output to ramp up in a more linear and controlled fashion, which helps reduce inrush current. Under some circumstances at start-up, an output voltage overshoot may still be observed. This may be due to a large output load applied during start-up. Large amounts of output external capacitance can also increase output voltage overshoot. A simple solution is to add a feed forward capacitor with a value between 470 pF and 1000 pF across the top feedback resistor (R1). See [Figure 23](#) for further detail.

## 8 Application and Implementation

### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 8.1 Application Information

#### 8.1.1 Boost Function

Capacitor  $C_{\text{BOOST}}$  and diode D2 in Figure 13 are used to generate a voltage  $V_{\text{BOOST}}$ .  $V_{\text{BOOST}} - V_{\text{SW}}$  is the gate drive voltage to the internal NMOS control switch. To properly drive the internal NMOS switch during its on-time,  $V_{\text{BOOST}}$  needs to be at least 1.6 V greater than  $V_{\text{SW}}$ . Although the LM2734-Q1 device will operate with this minimum voltage, it may not have sufficient gate drive to supply large values of output current. Therefore, it is recommended that  $V_{\text{BOOST}}$  be greater than 2.5 V above  $V_{\text{SW}}$  for best efficiency.  $V_{\text{BOOST}} - V_{\text{SW}}$  should not exceed the maximum operating limit of 5.5 V.

$5.5 \text{ V} > V_{\text{BOOST}} - V_{\text{SW}} > 2.5 \text{ V}$  for best performance.

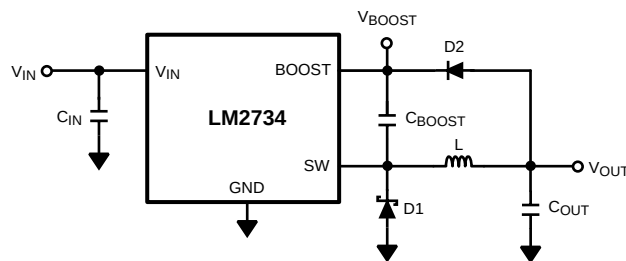


Figure 13.  $V_{\text{OUT}}$  Charges  $C_{\text{BOOST}}$

When the LM2734-Q1 device starts up, internal circuitry from the BOOST pin supplies a maximum of 20 mA to  $C_{\text{BOOST}}$ . This current charges  $C_{\text{BOOST}}$  to a voltage sufficient to turn the switch on. The BOOST pin continues to source current to  $C_{\text{BOOST}}$  until the voltage at the feedback pin is greater than 0.76 V.

There are various methods to derive  $V_{\text{BOOST}}$ :

1. From the input voltage ( $V_{\text{IN}}$ )
2. From the output voltage ( $V_{\text{OUT}}$ )
3. From an external distributed voltage rail ( $V_{\text{EXT}}$ )
4. From a shunt or series Zener diode

In the simplified block diagram of [Functional Block Diagram](#), capacitor  $C_{\text{BOOST}}$  and diode D2 supply the gate-drive current for the NMOS switch. Capacitor  $C_{\text{BOOST}}$  is charged via diode D2 by  $V_{\text{IN}}$ . During a normal switching cycle, when the internal NMOS control switch is off ( $T_{\text{OFF}}$ ) (refer to [Figure 12](#)),  $V_{\text{BOOST}}$  equals  $V_{\text{IN}}$  minus the forward voltage of D2 ( $V_{\text{FD2}}$ ), during which the current in the inductor (L) forward biases the Schottky diode D1 ( $V_{\text{FD1}}$ ). Therefore, the voltage stored across  $C_{\text{BOOST}}$  is:

$$V_{\text{BOOST}} - V_{\text{SW}} = V_{\text{IN}} - V_{\text{FD2}} + V_{\text{FD1}} \quad (1)$$

When the NMOS switch turns on ( $T_{\text{ON}}$ ), the switch pin rises to:

$$V_{\text{SW}} = V_{\text{IN}} - (R_{\text{DS(on)}} \times I_{\text{L}}), \quad (2)$$

forcing  $V_{\text{BOOST}}$  to rise thus reverse biasing D2. The voltage at  $V_{\text{BOOST}}$  is then:

$$V_{\text{BOOST}} = 2 V_{\text{IN}} - (R_{\text{DS(on)}} \times I_{\text{L}}) - V_{\text{FD2}} + V_{\text{FD1}} \quad (3)$$

which is approximately:

$$2V_{\text{IN}} - 0.4 \text{ V} \quad (4)$$

## Application Information (continued)

for many applications. Thus the gate-drive voltage of the NMOS switch is approximately:


$$V_{IN} - 0.2 \text{ V} \quad (5)$$

An alternate method for charging  $C_{BOOST}$  is to connect D2 to the output as shown in Figure 13. The output voltage should be from 2.5 V and 5.5 V, so that proper gate voltage will be applied to the internal switch. In this circuit,  $C_{BOOST}$  provides a gate drive voltage that is slightly less than  $V_{OUT}$ .

In applications where both  $V_{IN}$  and  $V_{OUT}$  are greater than 5.5 V, or less than 3 V,  $C_{BOOST}$  cannot be charged directly from these voltages. If  $V_{IN}$  to  $V_{OUT}$  are greater than 5.5 V,  $C_{BOOST}$  can be charged from  $V_{IN}$  or  $V_{OUT}$  minus a Zener voltage by placing a Zener diode D3 in series with D2, as shown in Figure 14. When using a series Zener diode from the input, ensure that the regulation of the input supply does not create a voltage that falls outside the recommended  $V_{BOOST}$  voltage.

$$(V_{INMAX} - V_{D3}) < 5.5 \text{ V} \quad (6)$$

$$(V_{INMIN} - V_{D3}) > 1.6 \text{ V} \quad (7)$$

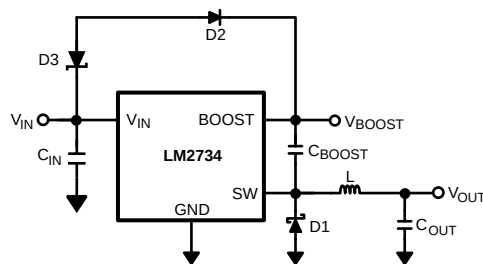

**Figure 14. Zener Reduces Boost Voltage from  $V_{IN}$**

An alternative method is to place the Zener diode D3 in a shunt configuration as shown in Figure 15. A small 350 mW to 500 mW 5.1-V Zener diode in a SOT or SOD package can be used for this purpose. A small ceramic capacitor such as a 6.3 V, 0.1- $\mu$ F capacitor ( $C_4$ ) should be placed in parallel with the Zener diode. When the internal NMOS switch turns on, a pulse of current is drawn to charge the internal NMOS gate capacitance. The 0.1- $\mu$ F parallel shunt capacitor ensures that the  $V_{BOOST}$  voltage is maintained during this time.

Resistor R3 should be chosen to provide enough RMS current to the Zener diode (D3) and to the BOOST pin. A recommended choice for the Zener current ( $I_{ZENER}$ ) is 1 mA. The current  $I_{BOOST}$  into the BOOST pin supplies the gate current of the NMOS control switch and varies typically according to the following formula for the X version:

$$I_{BOOST} = 0.56 \times (D + 0.54) \times (V_{ZENER} - V_{D2}) \text{ mA} \quad (8)$$

$I_{BOOST}$  can be calculated for the Y version using the following:

$$I_{BOOST} = 0.22 \times (D + 0.54) \times (V_{ZENER} - V_{D2}) \mu\text{A} \quad (9)$$

where D is the duty cycle,  $V_{ZENER}$  and  $V_{D2}$  are in volts, and  $I_{BOOST}$  is in milliamps.  $V_{ZENER}$  is the voltage applied to the anode of the boost diode (D2), and  $V_{D2}$  is the average forward voltage across D2. Note that this formula for  $I_{BOOST}$  gives typical current. For the worst case  $I_{BOOST}$ , increase the current by 40%. In that case, the worst case boost current will be:

$$I_{BOOST-MAX} = 1.4 \times I_{BOOST} \quad (10)$$

R3 will then be given by:

$$R3 = (V_{IN} - V_{ZENER}) / (1.4 \times I_{BOOST} + I_{ZENER}) \quad (11)$$

For example, using the X-version let  $V_{IN} = 10 \text{ V}$ ,  $V_{ZENER} = 5 \text{ V}$ ,  $V_{D2} = 0.7 \text{ V}$ ,  $I_{ZENER} = 1 \text{ mA}$ , and duty cycle D = 50%. Then:

$$I_{BOOST} = 0.56 \times (0.5 + 0.54) \times (5 - 0.7) \text{ mA} = 2.5 \text{ mA} \quad (12)$$

$$R3 = (10 \text{ V} - 5 \text{ V}) / (1.4 \times 2.5 \text{ mA} + 1 \text{ mA}) = 1.11 \text{ k}\Omega \quad (13)$$

## Application Information (continued)


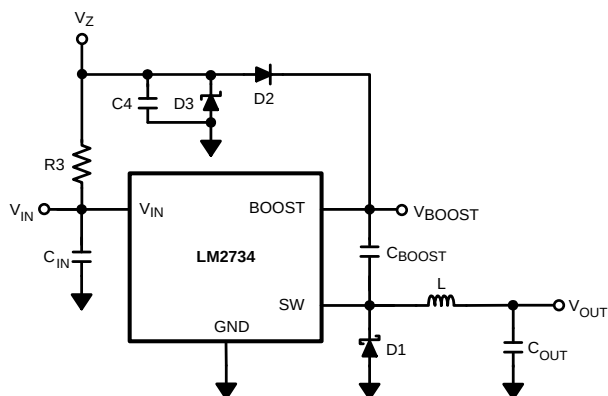


Figure 15. Boost Voltage Supplied from the Shunt Zener on  $V_{IN}$

## 8.2 Typical Applications

### 8.2.1 LM2734X (1.6 MHz) $V_{\text{BOOST}}$ Derived from $V_{\text{IN}}$ 5V to 1.5 V/1 A

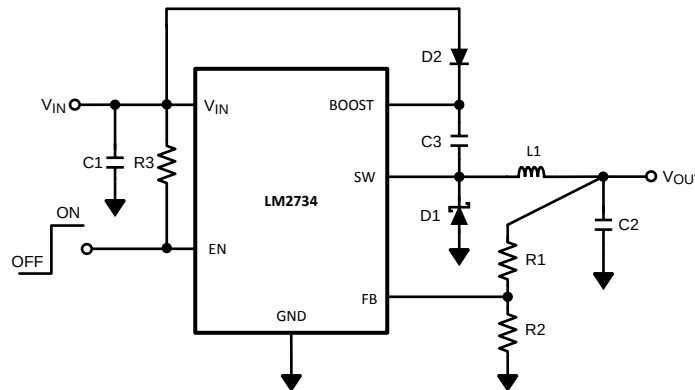

**Figure 16. LM2734X (1.6 MHz)  $V_{\text{BOOST}}$  Derived from  $V_{\text{IN}}$  5 V to 1.5-V/1-A Schematic**

#### 8.2.1.1 Design Requirements

Derive charge for  $V_{\text{BOOST}}$  from the input supply ( $V_{\text{IN}}$ ).  $V_{\text{BOOST}} - V_{\text{SW}}$  should not exceed the maximum operating limit of 5.5V.

#### 8.2.1.2 Detailed Design Procedure

**Table 1. Bill of Materials for Figure 16**

| PART ID         | PART VALUE                    | MANUFACTURER      | PART NUMBER        |
|-----------------|-------------------------------|-------------------|--------------------|
| U1              | 1-A Buck Regulator            | Texas Instruments | LM2734X            |
| C1, Input Cap   | 10 $\mu\text{F}$ , 6.3V, X5R  | TDK               | C3216X5ROJ106M     |
| C2, Output Cap  | 10 $\mu\text{F}$ , 6.3V, X5R  | TDK               | C3216X5ROJ106M     |
| C3, Boost Cap   | 0.01 $\mu\text{F}$ , 16V, X7R | TDK               | C1005X7R1C103K     |
| D1, Catch Diode | 0.3 $V_F$ Schottky 1 A, 10 VR | ON Semi           | MBRM110L           |
| D2, Boost Diode | 1 $V_F$ @ 50-mA Diode         | Diodes, Inc.      | 1N4148W            |
| L1              | 4.7 $\mu\text{H}$ , 1.7A,     | TDK               | VLCF4020T- 4R7N1R2 |
| R1              | 8.87 k $\Omega$ , 1%          | Vishay            | CRCW06038871F      |
| R2              | 10.2 k $\Omega$ , 1%          | Vishay            | CRCW06031022F      |
| R3              | 100 k $\Omega$ , 1%           | Vishay            | CRCW06031003F      |

##### 8.2.1.2.1 Custom Design With WEBENCH® Tools

[Click here](#) to create a custom design using the XXXXXXXX device with the WEBENCH® Power Designer.

1. Start by entering the input voltage ( $V_{\text{IN}}$ ), output voltage ( $V_{\text{OUT}}$ ), and output current ( $I_{\text{OUT}}$ ) requirements.
2. Optimize the design for key parameters such as efficiency, footprint, and cost using the optimizer dial.
3. Compare the generated design with other possible solutions from Texas Instruments.

The WEBENCH Power Designer provides a customized schematic along with a list of materials with real-time pricing and component availability.

In most cases, these actions are available:

- Run electrical simulations to see important waveforms and circuit performance
- Run thermal simulations to understand board thermal performance
- Export customized schematic and layout into popular CAD formats
- Print PDF reports for the design, and share the design with colleagues

Get more information about WEBENCH tools at [www.ti.com/WEBENCH](http://www.ti.com/WEBENCH).

### 8.2.1.2.2 Inductor Selection

The Duty Cycle (D) can be approximated quickly using the ratio of output voltage ( $V_O$ ) to input voltage ( $V_{IN}$ ):

$$D = \frac{V_O}{V_{IN}} \quad (14)$$

The catch diode ( $D_1$ ) forward voltage drop and the voltage drop across the internal NMOS must be included to calculate a more accurate duty cycle. Calculate D by using the following formula:

$$D = \frac{V_O + V_D}{V_{IN} + V_D - V_{SW}} \quad (15)$$

$V_{SW}$  can be approximated by:

$$V_{SW} = I_O \times R_{DS(ON)} \quad (16)$$

The diode forward drop ( $V_D$ ) can range from 0.3 V to 0.7 V depending on the quality of the diode. The lower  $V_D$  is, the higher the operating efficiency of the converter.

The inductor value determines the output ripple current. Lower inductor values decrease the size of the inductor, but increase the output ripple current. An increase in the inductor value will decrease the output ripple current. The ratio of ripple current ( $\Delta i_L$ ) to output current ( $I_O$ ) is optimized when it is set between 0.3 and 0.4 at 1 A. The ratio  $r$  is defined as:

$$r = \frac{\Delta i_L}{I_O} \quad (17)$$

One must also ensure that the minimum current limit (1.2 A) is not exceeded, so the peak current in the inductor must be calculated. The peak current ( $I_{LPK}$ ) in the inductor is calculated as shown in [Equation 18](#):

$$I_{LPK} = I_O + \Delta i_L / 2 \quad (18)$$

If  $r = 0.5$  at an output of 1 A, the peak current in the inductor will be 1.25 A. The minimum specified current limit over all operating conditions is 1.2 A. One can either reduce  $r$  to 0.4 resulting in a 1.2-A peak current, or make the engineering judgement that 50 mA over is safe enough with a 1.7-A typical current limit and 6 sigma limits. When the designed maximum output current is reduced, the ratio  $r$  can be increased. At a current of 0.1 A,  $r$  can be made as high as 0.9. The ripple ratio can be increased at lighter loads because the net ripple is actually quite low, and if  $r$  remains constant the inductor value can be made quite large. An equation empirically developed for the maximum ripple ratio at any current less than 2 A is:

$$r = 0.387 \times I_{OUT}^{-0.3667} \quad (19)$$

Note that this is just a guideline.

The LM2734-Q1 operates at frequencies allowing the use of ceramic output capacitors without compromising transient response. Ceramic capacitors allow higher inductor ripple without significantly increasing output ripple. See [Output Capacitor](#) for more details on calculating output voltage ripple.

Now that the ripple current or ripple ratio is determined, the inductance is calculated as shown in [Equation 20](#):

$$L = \frac{V_O + V_D}{I_O \times r \times f_s} \times (1-D)$$

where

- $f_s$  is the switching frequency
  - $I_O$  is the output current.
- (20)

When selecting an inductor, make sure that it is capable of supporting the peak output current without saturating. Inductor saturation will result in a sudden reduction in inductance and prevent the regulator from operating correctly. Because of the speed of the internal current limit, it is necessary to specify the peak current of the inductor only for the required maximum output current. For example, if the designed maximum output current is 0.5 A and the peak current is 0.7 A, then the inductor should be specified with a saturation current limit of >0.7 A.

There is no need to specify the saturation or peak current of the inductor at the 1.7-A typical switch current limit. The difference in inductor size is a factor of 5. Because of the operating frequency of the LM2734-Q1, ferrite based inductors are preferred to minimize core losses. This presents little restriction because the variety of ferrite based inductors is huge. Lastly, inductors with lower series resistance (DCR) will provide better operating efficiency. For recommended inductors see example circuits.

#### 8.2.1.2.3 Input Capacitor

An input capacitor is necessary to ensure that  $V_{IN}$  does not drop excessively during switching transients. The primary specifications of the input capacitor are capacitance, voltage, RMS current rating, and ESL (Equivalent Series Inductance). The recommended input capacitance is 10  $\mu$ F, although 4.7  $\mu$ F is sufficient for input voltages below 6 V. The input voltage rating is specifically stated by the capacitor manufacturer. Make sure to check any recommended deratings and also verify if there is any significant change in capacitance at the operating input voltage and the operating temperature. The input capacitor maximum RMS input current rating ( $I_{RMS-IN}$ ) must be greater than:

$$I_{RMS-IN} = I_O \times \sqrt{D \times \left(1 - D + \frac{r^2}{12}\right)} \quad (21)$$

From Equation 21 from the above equation that maximum RMS capacitor current occurs when  $D = 0.5$ . Always calculate the RMS at the point where the duty cycle,  $D$ , is closest to 0.5. The ESL of an input capacitor is usually determined by the effective cross sectional area of the current path. A large leaded capacitor will have high ESL and a 0805 ceramic chip capacitor will have very low ESL. At the operating frequencies of the LM2734-Q1 device, certain capacitors may have an ESL so large that the resulting impedance ( $2\pi fL$ ) will be higher than that required to provide stable operation. As a result, surface-mount capacitors are strongly recommended. Sanyo POSCAP, Tantalum or Niobium, Panasonic SP or Cornell Dubilier ESR, and multilayer ceramic capacitors (MLCC) are all good choices for both input and output capacitors and have very low ESL. For MLCCs it is recommended to use X7R or X5R dielectrics. Consult the capacitor manufacturer data sheet to see how rated capacitance varies over operating conditions.

#### 8.2.1.2.4 Output Capacitor

The output capacitor is selected based upon the desired output ripple and transient response. The initial current of a load transient is provided mainly by the output capacitor. The output ripple of the converter is:

$$\Delta V_O = \Delta i_L \times \left( R_{ESR} + \frac{1}{8 \times f_S \times C_O} \right) \quad (22)$$

When using MLCCs, the ESR is typically so low that the capacitive ripple may dominate. When this occurs, the output ripple will be approximately sinusoidal and 90° phase shifted from the switching action. Given the availability and quality of MLCCs and the expected output voltage of designs using the LM2734-Q1 device, there is really no need to review any other capacitor technologies. Another benefit of ceramic capacitors is their ability to bypass high frequency noise. A certain amount of switching edge noise will couple through parasitic capacitances in the inductor to the output. A ceramic capacitor will bypass this noise while a tantalum will not. Because the output capacitor is one of the two external components that control the stability of the regulator control loop, most applications will require a minimum at 10  $\mu$ F of output capacitance. Capacitance can be increased significantly with little detriment to the regulator stability. Like the input capacitor, recommended multilayer ceramic capacitors are X7R or X5R. Again, verify actual capacitance at the desired operating voltage and temperature.

Check the RMS current rating of the capacitor. The RMS current rating of the capacitor chosen must also meet the following condition:

$$I_{RMS-OUT} = I_O \times \frac{r}{\sqrt{12}} \quad (23)$$

#### 8.2.1.2.5 Catch Diode

The catch diode (D1) conducts during the switch off-time. A Schottky diode is recommended for its fast switching times and low forward voltage drop. The catch diode should be chosen so that its current rating is greater than:

$$I_{D1} = I_O \times (1 - D) \quad (24)$$

The reverse breakdown rating of the diode must be at least the maximum input voltage plus appropriate margin. To improve efficiency choose a Schottky diode with a low forward voltage drop.

#### 8.2.1.2.6 Boost Diode

A standard diode such as the 1N4148 type is recommended. For  $V_{\text{BOOST}}$  circuits derived from voltages less than 3.3 V, a small-signal Schottky diode is recommended for greater efficiency. A good choice is the BAT54 small signal diode.

#### 8.2.1.2.7 Boost Capacitor


A ceramic 0.01- $\mu\text{F}$  capacitor with a voltage rating of at least 16 V is sufficient. The X7R and X5R MLCCs provide the best performance.

### 8.2.1.2.8 Output Voltage


The output voltage is set using the following equation where R2 is connected between the FB pin and GND, and R1 is connected between  $V_O$  and the FB pin. A good value for R2 is 10 kΩ.

$$R1 = \left( \frac{V_O}{V_{REF}} - 1 \right) \times R2 \quad (25)$$


### 8.2.1.3 Application Curves

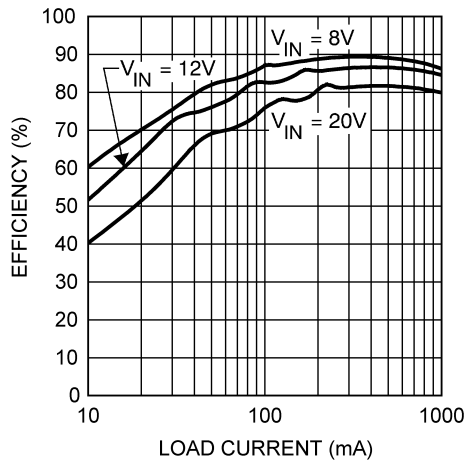


**Figure 17. Efficiency vs Load Current - L1 = 4.7 μH  $V_{OUT}$  = 5 V**

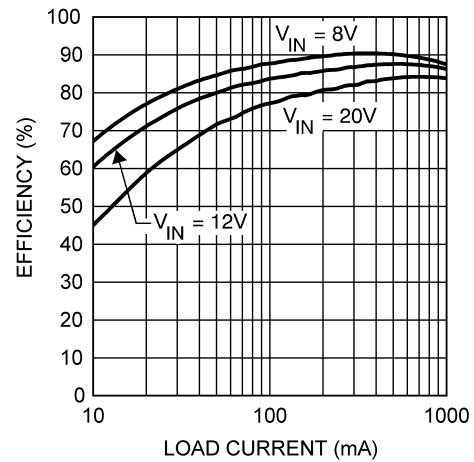


**Figure 18. Efficiency vs Load Current - L1 = 10 μH  $V_{OUT}$  = 5 V**

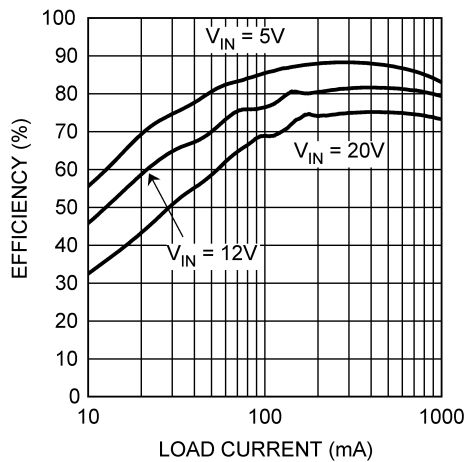


**Figure 19. Efficiency vs Load Current - L1 = 4.7 μH  $V_{OUT}$  = 3.3 V**

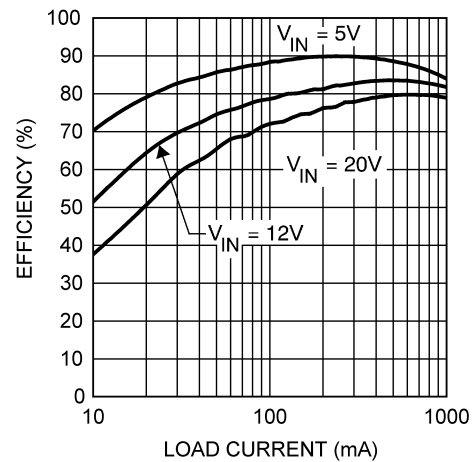

**Figure 20. Efficiency vs Load Current - L1 = 10 μH  $V_{OUT}$  = 3.3 V**

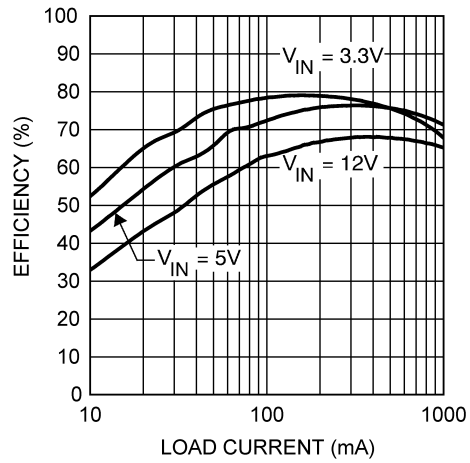


**Figure 21. Efficiency vs Load Current - L1 = 4.7 μH V<sub>OUT</sub> = 1.5 V**

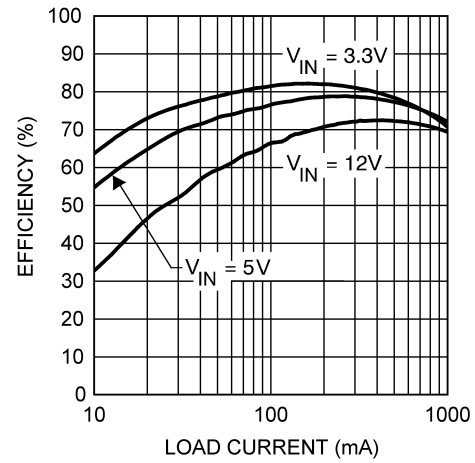

**Figure 22. Efficiency vs Load Current - L1 = 10 μH V<sub>OUT</sub> = 1.5 V**

## 8.2.2 LM2734X (1.6 MHz) $V_{\text{BOOST}}$ Derived from $V_{\text{OUT}}$ 12 V to 3.3 V /1 A

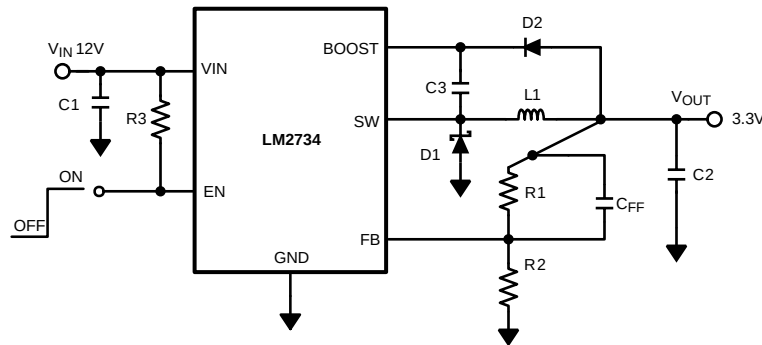

**Figure 23. LM2734X (1.6 MHz)  $V_{\text{BOOST}}$  Derived from  $V_{\text{OUT}}$  12 V to 3.3 V /1-A Schematic**

### 8.2.2.1 Design Requirements

Derive charge for  $V_{\text{BOOST}}$  from the output voltage, ( $V_{\text{OUT}}$ ). The output voltage should be between 2.5 V and 5.5 V.

### 8.2.2.2 Detailed Design Procedure

See [Detailed Design Procedure](#).

**Table 2. Bill of Materials for Figure 23**

| PART ID         | PART VALUE                              | MANUFACTURER      | PART NUMBER        |
|-----------------|-----------------------------------------|-------------------|--------------------|
| U1              | 1-A Buck Regulator                      | Texas Instruments | LM2734X            |
| C1, Input Cap   | 10 µF, 25 V, X7R                        | TDK               | C3225X7R1E106M     |
| C2, Output Cap  | 22 µF, 6.3 V, X5R                       | TDK               | C3216X5ROJ226M     |
| C3, Boost Cap   | 0.01 µF, 16 V, X7R                      | TDK               | C1005X7R1C103K     |
| CFF             | 1000 pF 25 V                            | TDK               | C0603X5R1E102K     |
| D1, Catch Diode | 0.34 V <sub>F</sub> Schottky 1 A, 30 VR | Vishay            | SS1P3L             |
| D2, Boost Diode | 1 V <sub>F</sub> @ 50-mA Diode          | Diodes, Inc.      | 1N4148W            |
| L1              | 4.7µH, 1.7 A                            | TDK               | VLCF4020T- 4R7N1R2 |
| R1              | 31.6 kΩ, 1%                             | Vishay            | CRCW06033162F      |
| R2              | 10 kΩ, 1%                               | Vishay            | CRCW06031002F      |
| R3              | 100 kΩ, 1%                              | Vishay            | CRCW06031003F      |

### 8.2.2.3 Application Curves

See [Application Curves](#).

## 8.2.3 LM2734X (1.6 MHz) $V_{\text{BOOST}}$ Derived from $V_{\text{SHUNT}}$ 18 V to 1.5 V /1 A

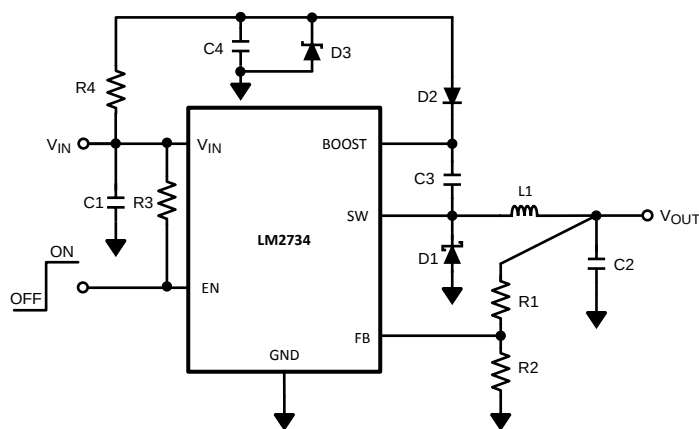


Figure 24. LM2734X (1.6 MHz)  $V_{\text{BOOST}}$  Derived from  $V_{\text{SHUNT}}$  18 V to 1.5 V /1-A Schematic

### 8.2.3.1 Design Requirements

An alternative method when  $V_{\text{IN}}$  is greater than 5.5 V is to place the zener diode D3 in a shunt configuration. A small 350 mW to 500 mW 5.1 V zener in a SOT or SOD package can be used for this purpose. A small ceramic capacitor such as a 6.3 V, 0.1  $\mu\text{F}$  capacitor (C4) should be placed in parallel with the zener diode. When the internal NMOS switch turns on, a pulse of current is drawn to charge the internal NMOS gate capacitance. The 0.1  $\mu\text{F}$  parallel shunt capacitor ensures that the  $V_{\text{BOOST}}$  voltage is maintained during this time.

### 8.2.3.2 Detailed Design Procedure

See [Detailed Design Procedure](#).


Table 3. Bill of Materials for Figure 24

| PART ID         | PART VALUE                     | MANUFACTURER      | PART NUMBER      |
|-----------------|--------------------------------|-------------------|------------------|
| U1              | 1-A Buck Regulator             | Texas Instruments | LM2734X          |
| C1, Input Cap   | 10 $\mu\text{F}$ , 25 V, X7R   | TDK               | C3225X7R1E106M   |
| C2, Output Cap  | 22 $\mu\text{F}$ , 6.3 V, X5R  | TDK               | C3216X5ROJ226M   |
| C3, Boost Cap   | 0.01 $\mu\text{F}$ , 16 V, X7R | TDK               | C1005X7R1C103K   |
| C4, Shunt Cap   | 0.1 $\mu\text{F}$ , 6.3 V, X5R | TDK               | C1005X5R0J104K   |
| D1, Catch Diode | 0.4 $V_F$ Schottky 1 A, 30 VR  | Vishay            | SS1P3L           |
| D2, Boost Diode | 1 $V_F$ @ 50-mA Diode          | Diodes, Inc.      | 1N4148W          |
| D3, Zener Diode | 5.1 V 250 Mw SOT               | Vishay            | BZX84C5V1        |
| L1              | 6.8 $\mu\text{H}$ , 1.6 A,     | TDK               | SLF7032T-6R8M1R6 |
| R1              | 8.87 k $\Omega$ , 1%           | Vishay            | CRCW06038871F    |
| R2              | 10.2 k $\Omega$ , 1%           | Vishay            | CRCW06031022F    |
| R3              | 100 k $\Omega$ , 1%            | Vishay            | CRCW06031003F    |
| R4              | 4.12 k $\Omega$ , 1%           | Vishay            | CRCW06034121F    |

### 8.2.3.3 Application Curves

See [Application Curves](#).

## 8.2.4 LM2734X (1.6 MHz) $V_{\text{BOOST}}$ Derived from Series Zener Diode ( $V_{\text{IN}}$ ) 15 V to 1.5 V / 1 A

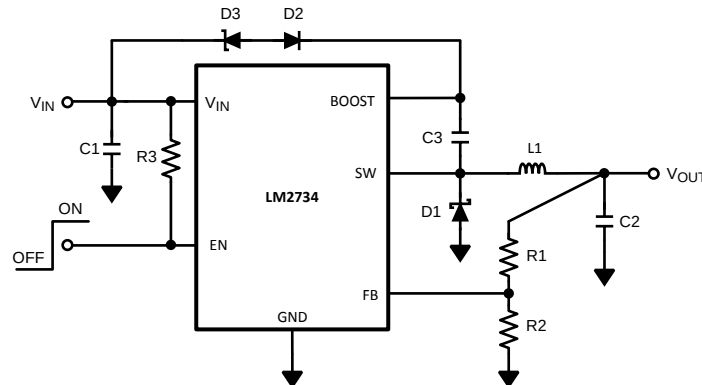

**Figure 25. LM2734X (1.6 MHz)  $V_{\text{BOOST}}$  Derived from Series Zener Diode ( $V_{\text{IN}}$ ) 15 V to 1.5 V / 1-A Schematic**

### 8.2.4.1 Design Requirements

In applications where both  $V_{\text{IN}}$  and  $V_{\text{OUT}}$  are greater than 5.5 V, or less than 3 V,  $C_{\text{BOOST}}$  cannot be charged directly from these voltages. If  $V_{\text{IN}}$  is greater than 5.5 V,  $C_{\text{BOOST}}$  can be charged from  $V_{\text{IN}}$  minus a zener voltage by placing a zener diode D3 in series with D2. When using a series zener diode from the input, ensure that the regulation of the input supply doesn't create a voltage that falls outside the recommended  $V_{\text{BOOST}}$  voltage.

$$(V_{\text{INMAX}} - V_{\text{D3}}) < 5.5 \text{ V} \quad (26)$$

$$(V_{\text{INMIN}} - V_{\text{D3}}) > 1.6 \text{ V} \quad (27)$$

### 8.2.4.2 Detailed Design Procedure

See [Detailed Design Procedure](#).

**Table 4. Bill of Materials for Figure 25**

| PART ID         | PART VALUE                     | MANUFACTURER      | PART NUMBER      |
|-----------------|--------------------------------|-------------------|------------------|
| U1              | 1-A Buck Regulator             | Texas Instruments | LM2734X          |
| C1, Input Cap   | 10 $\mu\text{F}$ , 25V, X7R    | TDK               | C3225X7R1E106M   |
| C2, Output Cap  | 22 $\mu\text{F}$ , 6.3 V, X5R  | TDK               | C3216X5ROJ226M   |
| C3, Boost Cap   | 0.01 $\mu\text{F}$ , 16 V, X7R | TDK               | C1005X7R1C103K   |
| D1, Catch Diode | 0.4 $V_F$ Schottky 1 A, 30 VR  | Vishay            | SS1P3L           |
| D2, Boost Diode | 1 $V_F$ @ 50-mA Diode          | Diodes, Inc.      | 1N4148W          |
| D3, Zener Diode | 11 V 350 Mw SOT                | Diodes, Inc.      | BZX84C11T        |
| L1              | 6.8 $\mu\text{H}$ , 1.6 A,     | TDK               | SLF7032T-6R8M1R6 |
| R1              | 8.87 k $\Omega$ , 1%           | Vishay            | CRCW06038871F    |
| R2              | 10.2 k $\Omega$ , 1%           | Vishay            | CRCW06031022F    |
| R3              | 100 k $\Omega$ , 1%            | Vishay            | CRCW06031003F    |

### 8.2.4.3 Application Curves

See [Application Curves](#).

## 8.2.5 LM2734X (1.6 MHz) $V_{\text{BOOST}}$ Derived from Series Zener Diode ( $V_{\text{OUT}}$ ) 15 V to 9 V /1 A

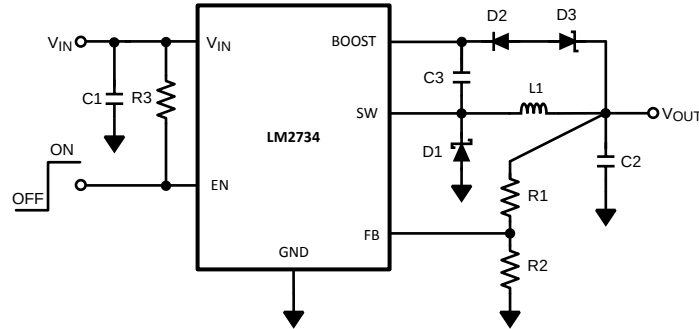


Figure 26. LM2734X (1.6 MHz)  $V_{\text{BOOST}}$  Derived from Series Zener Diode ( $V_{\text{OUT}}$ ) 15 V to 9 V /1-A Schematic

### 8.2.5.1 Design Requirements

In applications where both  $V_{\text{IN}}$  and  $V_{\text{OUT}}$  are greater than 5.5 V, or less than 3 V,  $C_{\text{BOOST}}$  cannot be charged directly from these voltages. If  $V_{\text{IN}}$  and  $V_{\text{OUT}}$  are greater than 5.5 V,  $C_{\text{BOOST}}$  can be charged from  $V_{\text{OUT}}$  minus a zener voltage by placing a zener diode D3 in series with D2.

### 8.2.5.2 Detailed Design Procedure

See [Detailed Design Procedure](#).


Table 5. Bill of Materials for [Figure 26](#)

| PART ID         | PART VALUE                     | MANUFACTURER      | PART NUMBER      |
|-----------------|--------------------------------|-------------------|------------------|
| U1              | 1-A Buck Regulator             | Texas Instruments | LM2734X          |
| C1, Input Cap   | 10 $\mu\text{F}$ , 25 V, X7R   | TDK               | C3225X7R1E106M   |
| C2, Output Cap  | 22 $\mu\text{F}$ , 16 V, X5R   | TDK               | C3216X5R1C226M   |
| C3, Boost Cap   | 0.01 $\mu\text{F}$ , 16 V, X7R | TDK               | C1005X7R1C103K   |
| D1, Catch Diode | 0.4 $V_F$ Schottky 1 A, 30 VR  | Vishay            | SS1P3L           |
| D2, Boost Diode | 1 $V_F$ @ 50-mA Diode          | Diodes, Inc.      | 1N4148W          |
| D3, Zener Diode | 4.3 V 350-mw SOT               | Diodes, Inc.      | BZX84C4V3        |
| L1              | 6.8 $\mu\text{H}$ , 1.6 A,     | TDK               | SLF7032T-6R8M1R6 |
| R1              | 102 k $\Omega$ , 1%            | Vishay            | CRCW06031023F    |
| R2              | 10.2 k $\Omega$ , 1%           | Vishay            | CRCW06031022F    |
| R3              | 100 k $\Omega$ , 1%            | Vishay            | CRCW06031003F    |

### 8.2.5.3 Application Curves

See [Application Curves](#).

## 8.2.6 LM2734Y (550 kHz) $V_{\text{BOOST}}$ Derived from $V_{\text{IN}}$ 5 V to 1.5 V / 1 A

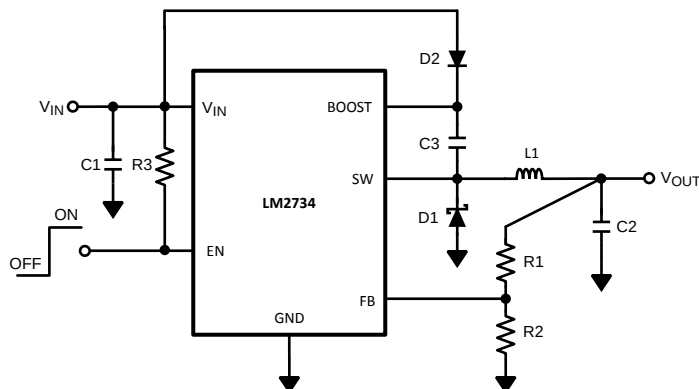

**Figure 27. LM2734Y (550 kHz)  $V_{\text{BOOST}}$  Derived from  $V_{\text{IN}}$  5 V to 1.5 V / 1-A Schematic**

### 8.2.6.1 Design Requirements

Derive charge for  $V_{\text{BOOST}}$  from the input supply ( $V_{\text{IN}}$ ).  $V_{\text{BOOST}} - V_{\text{SW}}$  should not exceed the maximum operating limit of 5.5 V.

### 8.2.6.2 Detailed Design Procedure

See [Detailed Design Procedure](#).

**Table 6. Bill of Materials for Figure 27**

| PART ID         | PART VALUE                     | MANUFACTURER      | PART NUMBER      |
|-----------------|--------------------------------|-------------------|------------------|
| U1              | 1-A Buck Regulator             | Texas Instruments | LM2734Y          |
| C1, Input Cap   | 10 $\mu\text{F}$ , 6.3 V, X5R  | TDK               | C3216X5ROJ106M   |
| C2, Output Cap  | 22 $\mu\text{F}$ , 6.3 V, X5R  | TDK               | C3216X5ROJ226M   |
| C3, Boost Cap   | 0.01 $\mu\text{F}$ , 16 V, X7R | TDK               | C1005X7R1C103K   |
| D1, Catch Diode | 0.3 $V_F$ Schottky 1 A, 10 VR  | ON Semi           | MBRM110L         |
| D2, Boost Diode | 1 $V_F$ @ 50-mA Diode          | Diodes, Inc.      | 1N4148W          |
| L1              | 10 $\mu\text{H}$ , 1.6 A,      | TDK               | SLF7032T-100M1R4 |
| R1              | 8.87 k $\Omega$ , 1%           | Vishay            | CRCW06038871F    |
| R2              | 10.2 k $\Omega$ , 1%           | Vishay            | CRCW06031022F    |
| R3              | 100 k $\Omega$ , 1%            | Vishay            | CRCW06031003F    |

### 8.2.6.3 Application Curves

See [Application Curves](#).

## 8.2.7 LM2734Y (550 kHz) $V_{\text{BOOST}}$ Derived from $V_{\text{OUT}}$ 12 V to 3.3 V / 1 A

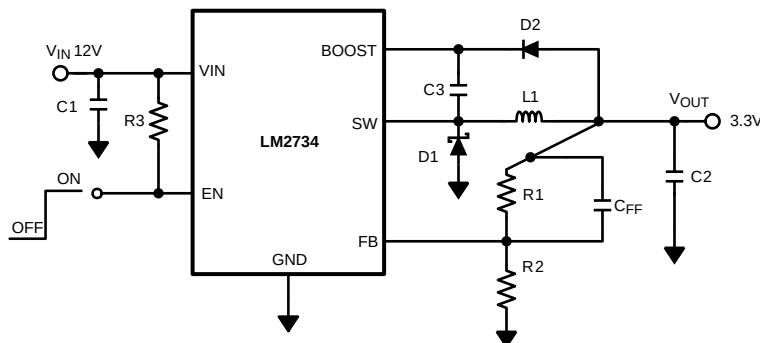


Figure 28. LM2734Y (550 kHz)  $V_{\text{BOOST}}$  Derived from  $V_{\text{OUT}}$  12 V to 3.3 V / 1 A Schematic

### 8.2.7.1 Design Requirements

Derive charge for  $V_{\text{BOOST}}$  from the output voltage, ( $V_{\text{OUT}}$ ). The output voltage should be between 2.5 V and 5.5 V.

### 8.2.7.2 Detailed Design Procedure

See [Detailed Design Procedure](#).


Table 7. Bill of Materials for [Figure 28](#)

| PART ID         | PART VALUE                    | MANUFACTURER      | PART NUMBER      |
|-----------------|-------------------------------|-------------------|------------------|
| U1              | 1-A Buck Regulator            | Texas Instruments | LM2734Y          |
| C1, Input Cap   | 10 $\mu$ F, 25 V, X7R         | TDK               | C3225X7R1E106M   |
| C2, Output Cap  | 22 $\mu$ F, 6.3 V, X5R        | TDK               | C3216X5ROJ226M   |
| C3, Boost Cap   | 0.01 $\mu$ F, 16 V, X7R       | TDK               | C1005X7R1C103K   |
| D1, Catch Diode | 0.34 $V_F$ Schottky 1 A, 30VR | Vishay            | SS1P3L           |
| D2, Boost Diode | 0.6 $V_F$ @ 30-mA Diode       | Vishay            | BAT17            |
| L1              | 10 $\mu$ H, 1.6 A             | TDK               | SLF7032T-100M1R4 |
| R1              | 31.6 k $\Omega$ , 1%          | Vishay            | CRCW06033162F    |
| R2              | 10.0 k $\Omega$ , 1%          | Vishay            | CRCW06031002F    |
| R3              | 100 k $\Omega$ , 1%           | Vishay            | CRCW06031003F    |

### 8.2.7.3 Application Curves

See [Application Curves](#).

## 8.2.8 LM2734Y (550 kHz) $V_{\text{BOOST}}$ Derived from $V_{\text{SHUNT}}$ 18 V to 1.5 V / 1 A

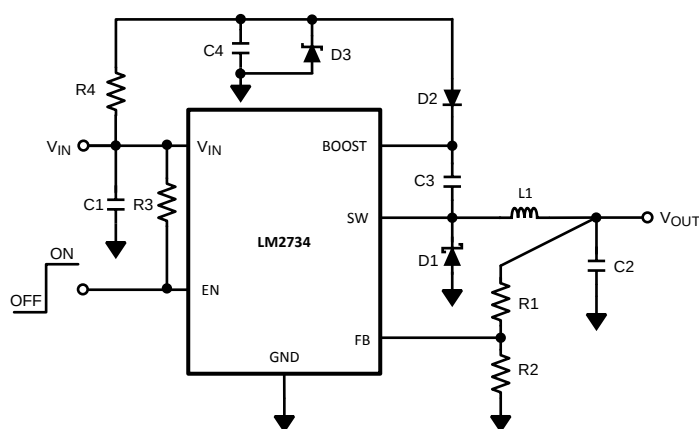

**Figure 29. LM2734Y (550 kHz)  $V_{\text{BOOST}}$  Derived from  $V_{\text{SHUNT}}$  18 V to 1.5 V / 1-A**

### 8.2.8.1 Design Requirements

An alternative method when  $V_{\text{IN}}$  is greater than 5.5 V is to place the zener diode D3 in a shunt configuration. A small 350 mW to 500 mW 5.1 V zener in a SOT or SOD package can be used for this purpose. A small ceramic capacitor such as a 6.3 V, 0.1  $\mu\text{F}$  capacitor (C4) should be placed in parallel with the zener diode. When the internal NMOS switch turns on, a pulse of current is drawn to charge the internal NMOS gate capacitance. The 0.1  $\mu\text{F}$  parallel shunt capacitor ensures that the  $V_{\text{BOOST}}$  voltage is maintained during this time.

### 8.2.8.2 Detailed Design Procedure

See [Detailed Design Procedure](#).


**Table 8. Bill of Materials for Figure 29**

| PART ID         | PART VALUE                     | MANUFACTURER      | PART NUMBER      |
|-----------------|--------------------------------|-------------------|------------------|
| U1              | 1-A Buck Regulator             | Texas Instruments | LM2734Y          |
| C1, Input Cap   | 10 $\mu\text{F}$ , 25 V, X7R   | TDK               | C3225X7R1E106M   |
| C2, Output Cap  | 22 $\mu\text{F}$ , 6.3 V, X5R  | TDK               | C3216X5ROJ226M   |
| C3, Boost Cap   | 0.01 $\mu\text{F}$ , 16 V, X7R | TDK               | C1005X7R1C103K   |
| C4, Shunt Cap   | 0.1 $\mu\text{F}$ , 6.3 V, X5R | TDK               | C1005X5R0J104K   |
| D1, Catch Diode | 0.4 $V_F$ Schottky 1 A, 30VR   | Vishay            | SS1P3L           |
| D2, Boost Diode | 1 $V_F$ @ 50-mA Diode          | Diodes, Inc.      | 1N4148W          |
| D3, Zener Diode | 5.1 V 250 Mw SOT               | Vishay            | BZX84C5V1        |
| L1              | 15 $\mu\text{H}$ , 1.5 A       | TDK               | SLF7045T-150M1R5 |
| R1              | 8.87 $k\Omega$ , 1%            | Vishay            | CRCW06038871F    |
| R2              | 10.2 $k\Omega$ , 1%            | Vishay            | CRCW06031022F    |
| R3              | 100 $k\Omega$ , 1%             | Vishay            | CRCW06031003F    |
| R4              | 4.12 $k\Omega$ , 1%            | Vishay            | CRCW06034121F    |

### 8.2.8.3 Application Curves

See [Application Curves](#).

## 8.2.9 LM2734Y (550 kHz) $V_{\text{BOOST}}$ Derived from Series Zener Diode ( $V_{\text{IN}}$ ) 15 V to 1.5 V / 1 A

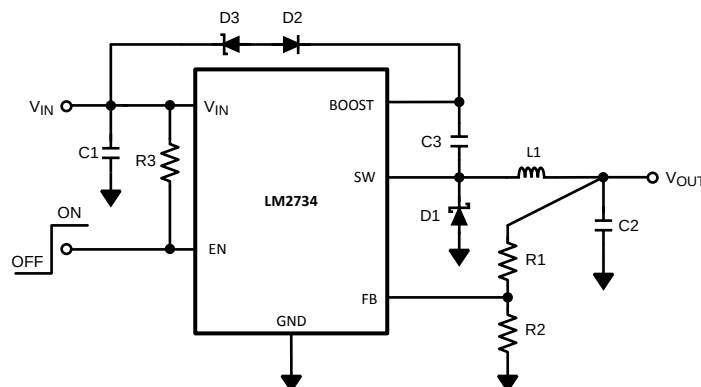

**Figure 30. LM2734Y (550 kHz)  $V_{\text{BOOST}}$  Derived from Series Zener Diode ( $V_{\text{IN}}$ ) 15 V to 1.5 V / 1-A Schematic**

### 8.2.9.1 Design Requirements

In applications where both  $V_{\text{IN}}$  and  $V_{\text{OUT}}$  are greater than 5.5 V, or less than 3 V,  $C_{\text{BOOST}}$  cannot be charged directly from these voltages. If  $V_{\text{IN}}$  is greater than 5.5 V,  $C_{\text{BOOST}}$  can be charged from  $V_{\text{IN}}$  minus a zener voltage by placing a zener diode D3 in series with D2. When using a series zener diode from the input, ensure that the regulation of the input supply doesn't create a voltage that falls outside the recommended  $V_{\text{BOOST}}$  voltage.

$$(V_{\text{INMAX}} - V_{\text{D3}}) < 5.5 \text{ V} \quad (28)$$

$$(V_{\text{INMIN}} - V_{\text{D3}}) > 1.6 \text{ V} \quad (29)$$

### 8.2.9.2 Detailed Design Procedure

See [Detailed Design Procedure](#).


**Table 9. Bill of Materials for Figure 30**

| PART ID         | PART VALUE                     | MANUFACTURER      | PART NUMBER      |
|-----------------|--------------------------------|-------------------|------------------|
| U1              | 1-A Buck Regulator             | Texas Instruments | LM2734Y          |
| C1, Input Cap   | 10 $\mu\text{F}$ , 25 V, X7R   | TDK               | C3225X7R1E106M   |
| C2, Output Cap  | 22 $\mu\text{F}$ , 6.3 V, X5R  | TDK               | C3216X5ROJ226M   |
| C3, Boost Cap   | 0.01 $\mu\text{F}$ , 16 V, X7R | TDK               | C1005X7R1C103K   |
| D1, Catch Diode | 0.4 $V_F$ Schottky 1 A, 30 VR  | Vishay            | SS1P3L           |
| D2, Boost Diode | 1 $V_F$ @ 50-mA Diode          | Diodes, Inc.      | 1N4148W          |
| D3, Zener Diode | 11 V 350 Mw SOT                | Diodes, Inc.      | BZX84C11T        |
| L1              | 15 $\mu\text{H}$ , 1.5 A,      | TDK               | SLF7045T-150M1R5 |
| R1              | 8.87 $k\Omega$ , 1%            | Vishay            | CRCW06038871F    |
| R2              | 10.2 $k\Omega$ , 1%            | Vishay            | CRCW06031022F    |
| R3              | 100 $k\Omega$ , 1%             | Vishay            | CRCW06031003F    |

### 8.2.9.3 Application Curves

See [Application Curves](#).

## 8.2.10 LM2734Y (550 kHz) $V_{BOOST}$ Derived from Series Zener Diode ( $V_{OUT}$ ) 15 V to 9 V / 1 A

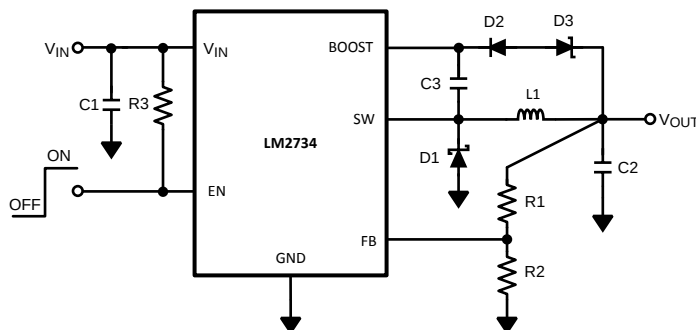

**Figure 31. LM2734Y (550 kHz)  $V_{BOOST}$  Derived from Series Zener Diode ( $V_{OUT}$ ) 15 V to 9 V / 1-A**

### 8.2.10.1 Design Requirements

In applications where both  $V_{IN}$  and  $V_{OUT}$  are greater than 5.5 V, or less than 3 V,  $C_{BOOST}$  cannot be charged directly from these voltages. If  $V_{IN}$  and  $V_{OUT}$  are greater than 5.5 V,  $C_{BOOST}$  can be charged from  $V_{OUT}$  minus a zener voltage by placing a zener diode D3 in series with D2.

### 8.2.10.2 Detailed Design Procedure

See [Detailed Design Procedure](#).

**Table 10. Bill of Materials for Figure 31**

| PART ID         | PART VALUE                             | MANUFACTURER      | PART NUMBER          |
|-----------------|----------------------------------------|-------------------|----------------------|
| U1              | 1-A Buck Regulator                     | Texas Instruments | LM2734Y              |
| C1, Input Cap   | 10 µF, 25 V, X7R                       | TDK               | C3225X7R1E106M       |
| C2, Output Cap  | 22 µF, 16 V, X5R                       | TDK               | C3216X5R1C226M       |
| C3, Boost Cap   | 0.0 1 µF, 16 V, X7R                    | TDK               | C1005X7R1C103K       |
| D1, Catch Diode | 0.4 V <sub>F</sub> Schottky 1 A, 30 VR | Vishay            | SS1P3L               |
| D2, Boost Diode | 1 V <sub>F</sub> @ 50-mA Diode         | Diodes, Inc.      | 1N4148W              |
| D3, Zener Diode | 4.3 V 350 Mw SOT                       | Diodes, Inc.      | BZX84C4V3            |
| L1              | 22 µH, 1.4 A,                          | TDK               | SLF7045T-220M1R3-1PF |
| R1              | 102 kΩ, 1%                             | Vishay            | CRCW06031023F        |
| R2              | 10.2kΩ, 1%                             | Vishay            | CRCW06031022F        |
| R3              | 100kΩ, 1%                              | Vishay            | CRCW06031003F        |

### 8.2.10.3 Application Curves

See [Application Curves](#).

## 9 Power Supply Recommendations

Input voltage is rated as 3 V to 18 V; however, care must be taken in certain circuit configurations (for example,  $V_{\text{BOOST}}$  derived from  $V_{\text{IN}}$  where the requirement that  $V_{\text{BOOST}} - V_{\text{SW}} < 5.5 \text{ V}$  should be observed) Also, for best efficiency  $V_{\text{BOOST}}$  should be at least 2.5-V above  $V_{\text{SW}}$ .

The voltage on the Enable pin should not exceed  $V_{\text{IN}}$  by more than 0.3 V.

## 10 Layout

### 10.1 Layout Guidelines

When planning layout there are a few things to consider when trying to achieve a clean, regulated output. The most important consideration when completing the layout is the close coupling of the GND connections of the  $C_{\text{IN}}$  capacitor and the catch diode D1. These ground ends should be close to one another and be connected to the GND plane with at least two through-holes. Place these components as close to the IC as possible. Next in importance is the location of the GND connection of the  $C_{\text{OUT}}$  capacitor, which should be near the GND connections of  $C_{\text{IN}}$  and D1.


There should be a continuous ground plane on the bottom layer of a two-layer board except under the switching node island.

The FB pin is a high-impedance node — take care to make the FB trace short to avoid noise pickup and inaccurate regulation. The feedback resistors should be placed as close as possible to the IC, with the GND of R2 placed as close as possible to the GND of the IC. The  $V_{\text{OUT}}$  trace to R1 should be routed away from the inductor and any other traces that are switching.


High AC currents flow through the  $V_{\text{IN}}$ , SW and  $V_{\text{OUT}}$  traces, so they should be as short and wide as possible. However, making the traces wide increases radiated noise, so the designer must make this trade-off. Radiated noise can be decreased by choosing a shielded inductor.

The remaining components should also be placed as close as possible to the IC. See Application Note AN-1229 ([SNVA054](#)) for further considerations and the LM2734-Q1 demo board as an example of a four-layer layout.

## 10.2 Layout Example

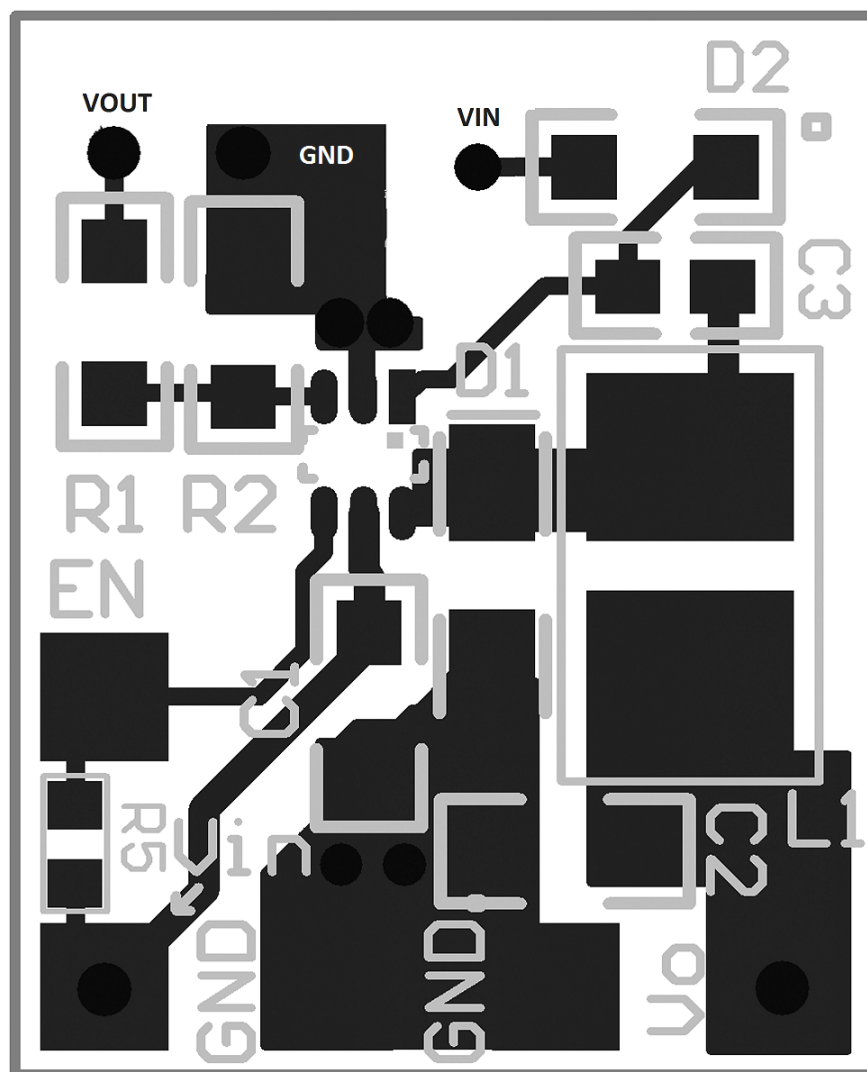

**Figure 32. Top Layer**

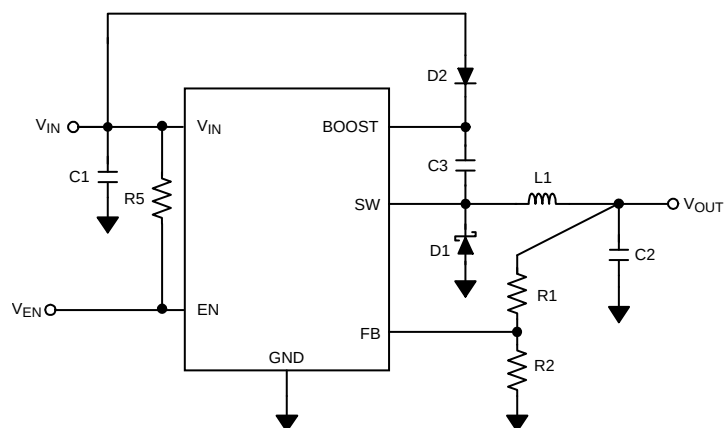

**Figure 33. Layout Schematic**

## 11 Device and Documentation Support

### 11.1 Development Support

#### 11.1.1 Custom Design With WEBENCH® Tools

[Click here](#) to create a custom design using the LM2734-Q1 device with the WEBENCH® Power Designer.

1. Start by entering the input voltage ( $V_{IN}$ ), output voltage ( $V_{OUT}$ ), and output current ( $I_{OUT}$ ) requirements.
2. Optimize the design for key parameters such as efficiency, footprint, and cost using the optimizer dial.
3. Compare the generated design with other possible solutions from Texas Instruments.

The WEBENCH Power Designer provides a customized schematic along with a list of materials with real-time pricing and component availability.

In most cases, these actions are available:

- Run electrical simulations to see important waveforms and circuit performance
- Run thermal simulations to understand board thermal performance
- Export customized schematic and layout into popular CAD formats
- Print PDF reports for the design, and share the design with colleagues

Get more information about WEBENCH tools at [www.ti.com/WEBENCH](http://www.ti.com/WEBENCH).

### 11.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 11.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 11.4 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

### 11.5 Trademarks

E2E is a trademark of Texas Instruments.

WEBENCH is a registered trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 11.6 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## 11.7 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number            | Status<br>(1) | Material type<br>(2) | Package   Pins        | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|----------------------------------|---------------|----------------------|-----------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">LM2734XQMK/NOPB</a>  | Active        | Production           | SOT-23-THIN (DDC)   6 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | SUKB                |
| LM2734XQMK/NOPB.A                | Active        | Production           | SOT-23-THIN (DDC)   6 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | SUKB                |
| <a href="#">LM2734XQMKE/NOPB</a> | Active        | Production           | SOT-23-THIN (DDC)   6 | 250   SMALL T&R       | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | SUKB                |
| LM2734XQMKE/NOPB.A               | Active        | Production           | SOT-23-THIN (DDC)   6 | 250   SMALL T&R       | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | SUKB                |
| <a href="#">LM2734XQMKX/NOPB</a> | Active        | Production           | SOT-23-THIN (DDC)   6 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | SUKB                |
| LM2734XQMKX/NOPB.A               | Active        | Production           | SOT-23-THIN (DDC)   6 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | SUKB                |
| <a href="#">LM2734YQMK/NOPB</a>  | Active        | Production           | SOT-23-THIN (DDC)   6 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | SVCB                |
| LM2734YQMK/NOPB.A                | Active        | Production           | SOT-23-THIN (DDC)   6 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | SVCB                |
| <a href="#">LM2734YQMKE/NOPB</a> | Active        | Production           | SOT-23-THIN (DDC)   6 | 250   SMALL T&R       | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | SVCB                |
| LM2734YQMKE/NOPB.A               | Active        | Production           | SOT-23-THIN (DDC)   6 | 250   SMALL T&R       | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | SVCB                |
| <a href="#">LM2734YQMKX/NOPB</a> | Active        | Production           | SOT-23-THIN (DDC)   6 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | SVCB                |
| LM2734YQMKX/NOPB.A               | Active        | Production           | SOT-23-THIN (DDC)   6 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | SVCB                |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


**OTHER QUALIFIED VERSIONS OF LM2734-Q1 :**

- Catalog : [LM2734](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product


## TAPE AND REEL INFORMATION

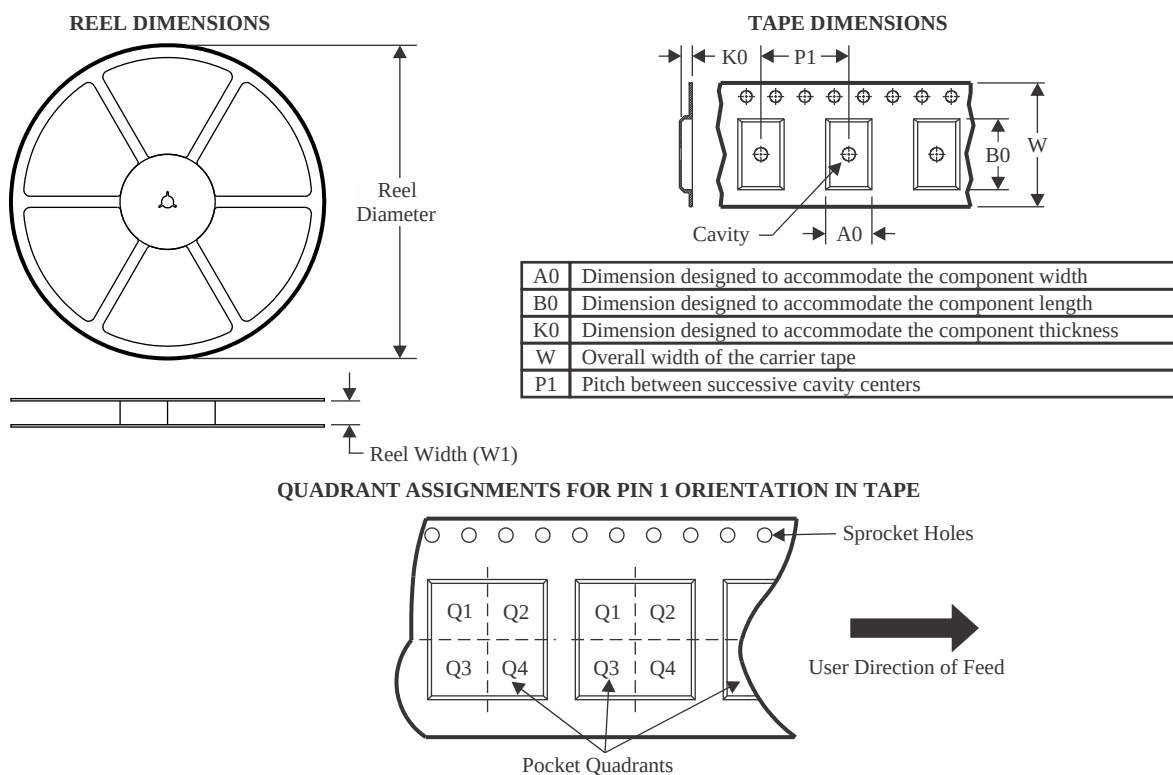

\*All dimensions are nominal


| Device           | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM2734XQMK/NOPB  | SOT-23-THIN  | DDC             | 6    | 1000 | 178.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| LM2734XQMKE/NOPB | SOT-23-THIN  | DDC             | 6    | 250  | 178.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| LM2734XQMKX/NOPB | SOT-23-THIN  | DDC             | 6    | 3000 | 178.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| LM2734YQMK/NOPB  | SOT-23-THIN  | DDC             | 6    | 1000 | 178.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| LM2734YQMKE/NOPB | SOT-23-THIN  | DDC             | 6    | 250  | 178.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| LM2734YQMKX/NOPB | SOT-23-THIN  | DDC             | 6    | 3000 | 178.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |

## TAPE AND REEL BOX DIMENSIONS

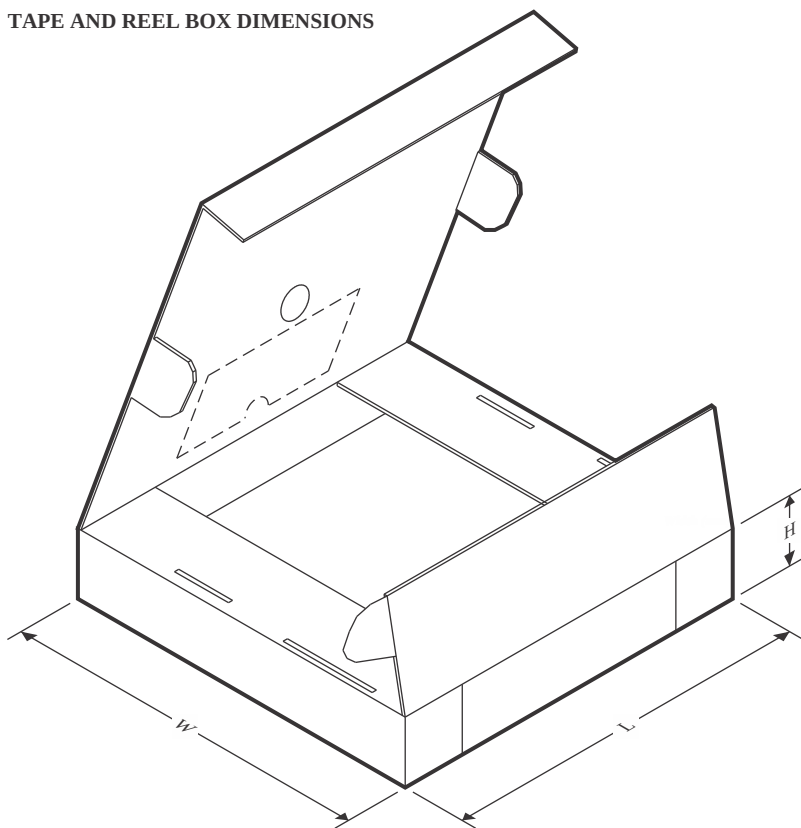

\*All dimensions are nominal

| Device           | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LM2734XQMK/NOPB  | SOT-23-THIN  | DDC             | 6    | 1000 | 210.0       | 185.0      | 35.0        |
| LM2734XQMKE/NOPB | SOT-23-THIN  | DDC             | 6    | 250  | 210.0       | 185.0      | 35.0        |
| LM2734XQMKX/NOPB | SOT-23-THIN  | DDC             | 6    | 3000 | 210.0       | 185.0      | 35.0        |
| LM2734YQMK/NOPB  | SOT-23-THIN  | DDC             | 6    | 1000 | 210.0       | 185.0      | 35.0        |
| LM2734YQMKE/NOPB | SOT-23-THIN  | DDC             | 6    | 250  | 210.0       | 185.0      | 35.0        |
| LM2734YQMKX/NOPB | SOT-23-THIN  | DDC             | 6    | 3000 | 210.0       | 185.0      | 35.0        |

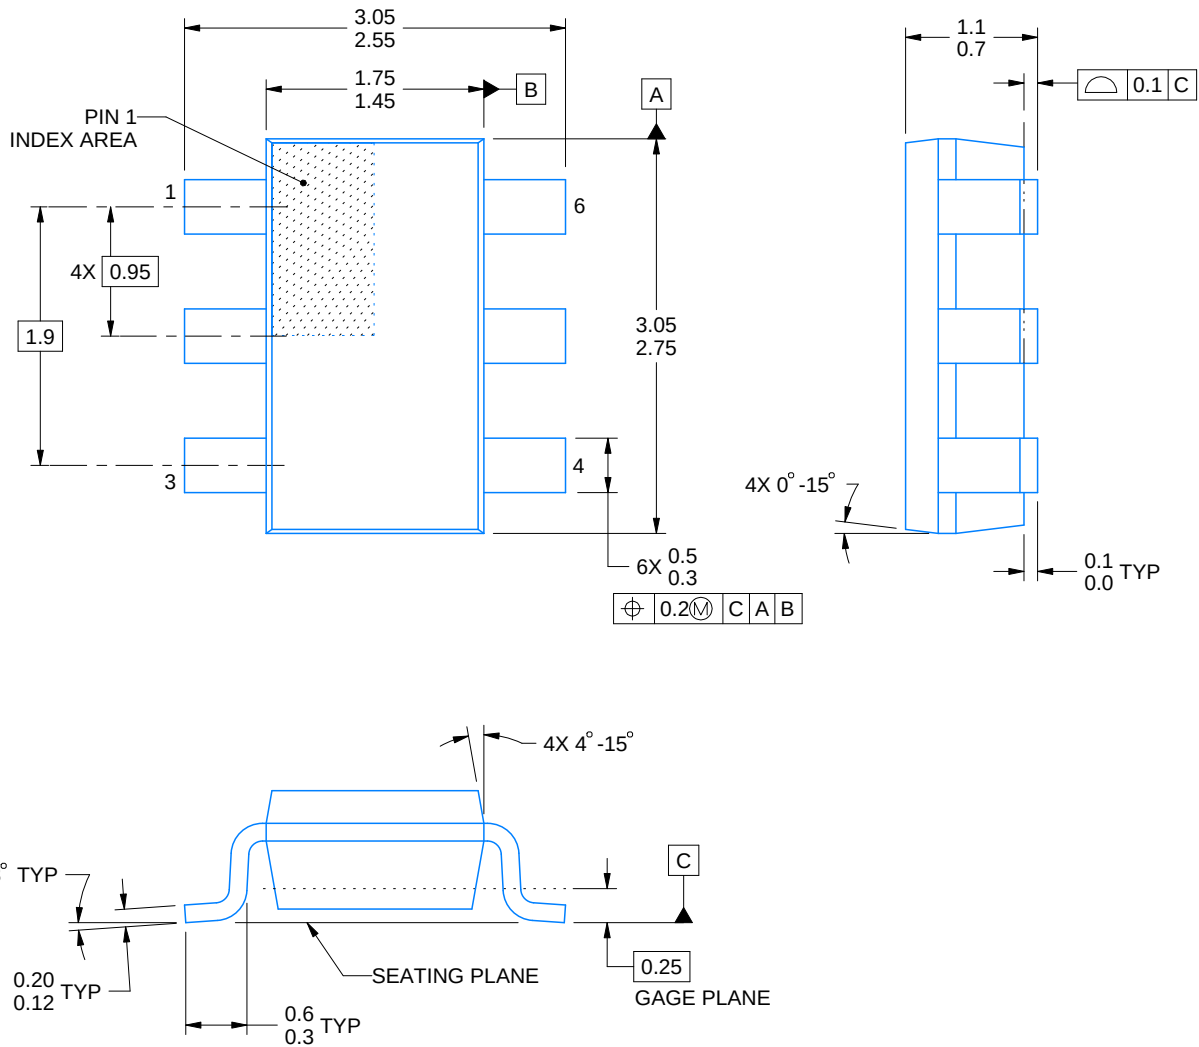

4214841/E 08/2024

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-193.

# EXAMPLE BOARD LAYOUT


DDC0006A

SOT-23 - 1.1 max height

SMALL OUTLINE TRANSISTOR

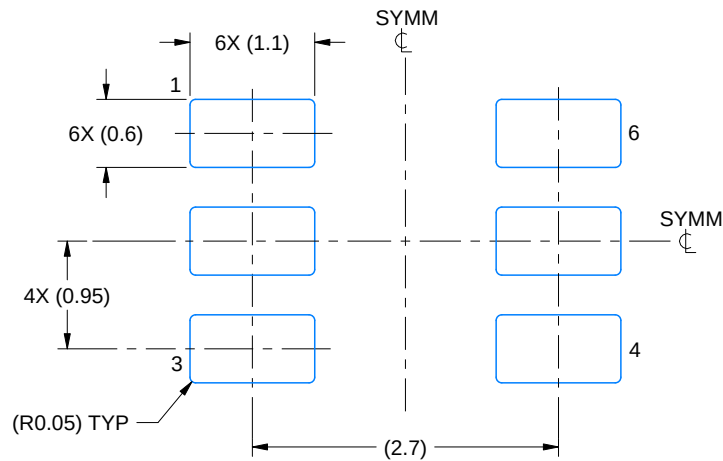

LAND PATTERN EXAMPLE  
EXPLODED METAL SHOWN  
SCALE:15X

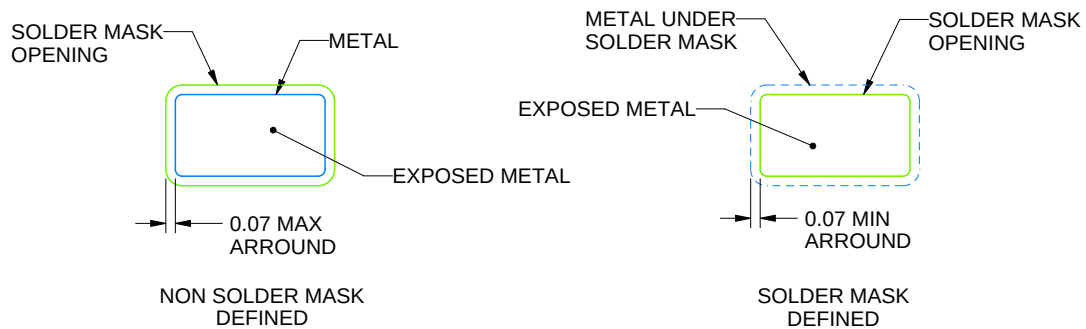


SOLDERMASK DETAILS

4214841/E 08/2024

NOTES: (continued)

4. Publication IPC-7351 may have alternate designs.
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

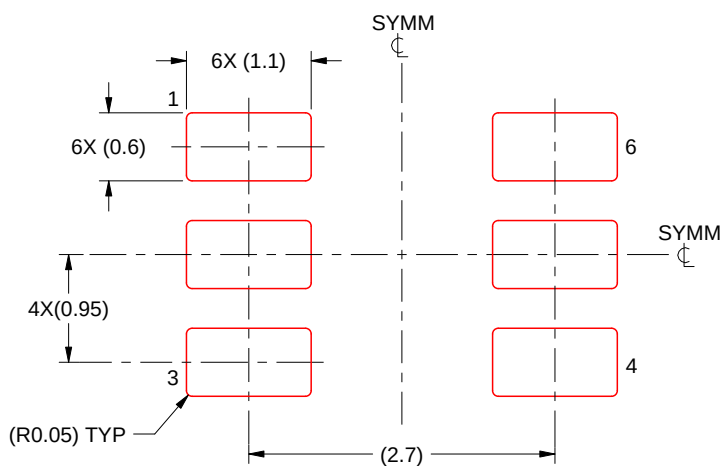

SOLDER PASTE EXAMPLE  
BASED ON 0.125 THICK STENCIL  
SCALE:15X

4214841/E 08/2024

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
7. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated