

10.3Gbps Thunderbolt™ Port and DisplayPort™ Switch

Check for Samples: [HD3SS0001](#)

FEATURES

- **Compatible with Thunderbolt™ Technology Electrical Standards and DisplayPort™ 1.2a**
- **Wide –3dB Differential Bandwidth of Over 10GHz on 10G Path**
- **Supports DP and DP++ Configurations**
- **Handles HPD (5V tolerant) and Cable Detect**
- **Supports AUX and DDC MUX**
- **Excellent Dynamic Characteristics (on 10G path, typical values at 5GHz):**
 - Crosstalk = –35dB
 - Off-Isolation = –24dB
 - Insertion Loss = –1.5dB
 - Return Loss = –20dB
 - Intra-pair Skew Added < 4ps
- **Single 3.3V Power Supply**
- **Small 3x3mm 24-Pin QFN Package**
- **Low Power Consumption**
 - 3.3mW Typical Active Power
 - 80 μ W Typical Detect Mode


DESCRIPTION

The HD3SS0001 is a high-speed passive-switch device with integrated buffers and resistors, designed to support Thunderbolt™ technology, DisplayPort, and Dual Mode DisplayPort. The 10G path supports a high 10GHz bandwidth and excellent loss characteristics, while the DisplayPort path supports 5.4Gbps.

The integrated 3-pairs to 1-pair multiplexer (3:1 MUX) switches between DDC, AUX, and 10.3Gbps signals. The integrated 2-pairs to 1-pair multiplexer (2:1 MUX) switches between the Thunderbolt™ technology Low Speed UART transmit/receive pair and DisplayPort Main Link 1.

The MUXs are controlled by 4 input pins: TRI#, DP_EN#, 10G_EN, and CAD_IN (cable detect from the connector). The HD3SS0001 is packaged in a small 3x3mm 24-pin QFN, operates from a single 3.3V supply, and supports an ambient temperature range of –40°C to 85°C.

FUNCTIONAL DIAGRAM

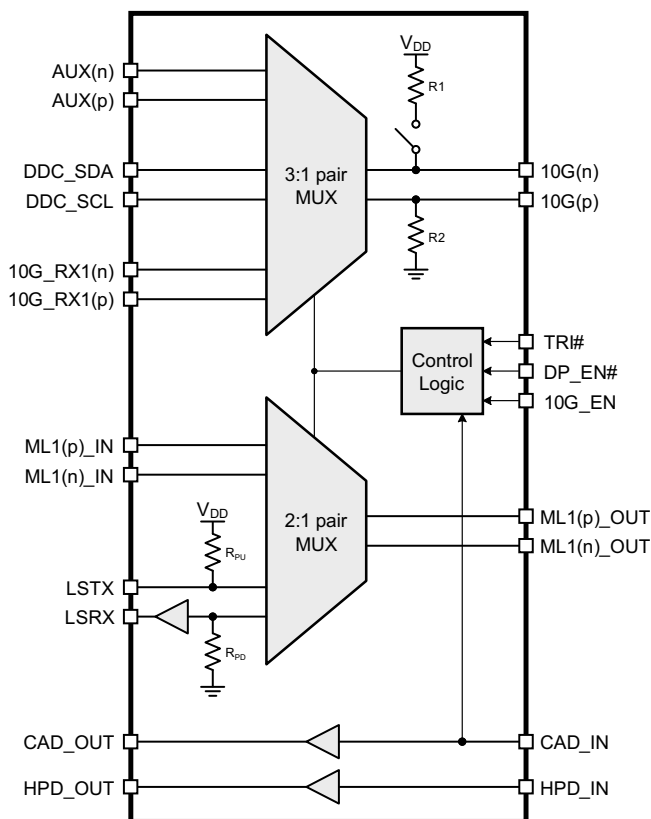

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Thunderbolt is a trademark of Intel Corp.

DisplayPort is a trademark of VESA Standards Association.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2013, Texas Instruments Incorporated


HD3SS0001

SLAS827 –SEPTEMBER 2013

www.ti.com


These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

TYPICAL APPLICATION

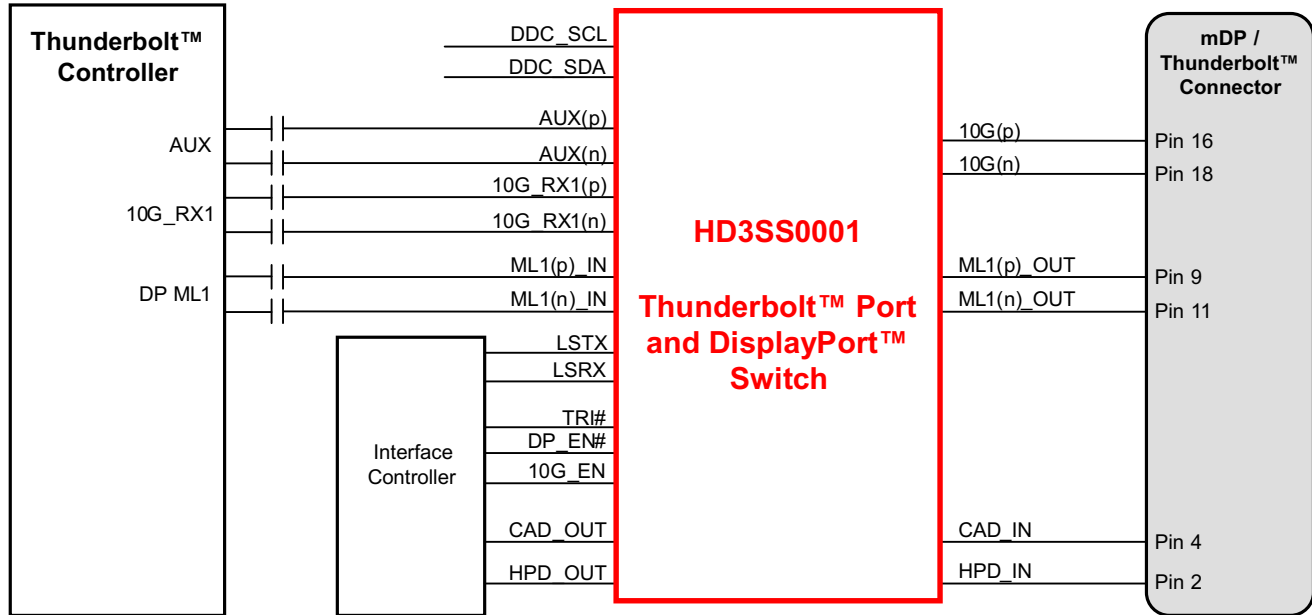


TRUTH TABLE

MODE	LOGICAL INPUT TO SET ⁽¹⁾				EFFECT		
	TRI#	DP_EN#	10G_EN	CAD_IN	2:1 MUX SELECTION ⁽²⁾	3:1 MUX SELECTION ⁽²⁾	PULL-UP RESISTOR on 10G(n)
Thunderbolt™ Protocol	1	1	1	X	LS	10G	Disconnected
	0	1	1	X	LS	Tri-stated	Disconnected
DisplayPort	1	0	0	0	ML	AUX	Connected
	0	0	0	0	Tri-Stated	Tri-stated	Connected
TMDS	1	0	0	1	ML	DDC	Connected
	0	0	0	1	Tri-Stated	Tri-stated	Connected
Detect Mode	X	1	0	X	LS	Tri-Stated	Connected
[Invalid]	X	0	1	X	Tri-Stated	Tri-Stated	Disconnected

(1) "X" = Don't Care.

(2) MUX Selection names are abbreviated.

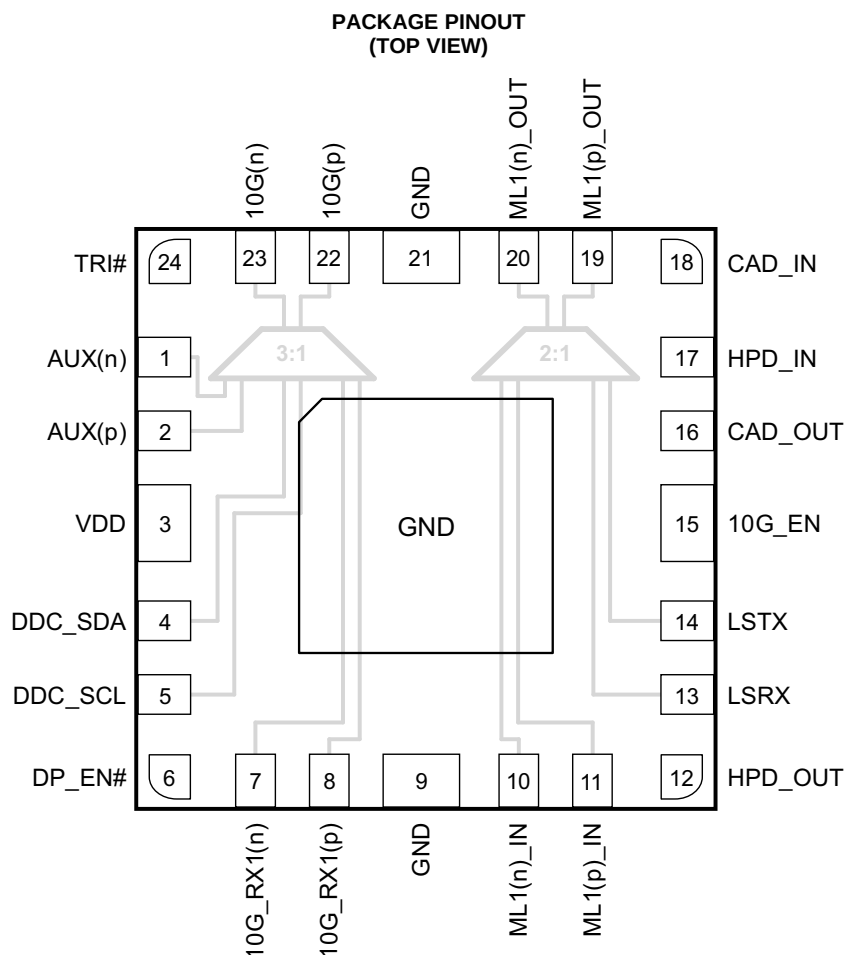

MUX PIN MAPPING⁽¹⁾

CONTROLLER-SIDE PIN	Connector-Side Pin
AUX(n)	10G(n)
DDC_SDA	
10G_RX1(n)	
AUX(p)	10G(p)
DDC_SCL	
10G_RX1(p)	
ML1(p)_IN	ML1(p)_OUT
LSTX	
ML1(n)_IN	ML1(n)_OUT
LSRX	

(1) NOTE: The HD3SS0001 can tolerate polarity inversions for the differential signals denoted by the (p) and (n) terminology, to ease potential board routing issues. LSTX/LSRX cannot be swapped, since LSRX is buffered and therefore unidirectional. Also, note that the integrated pullup on 10G(n) and the integrated pulldown on 10G(p) cannot be swapped.

PIN FUNCTIONS

PIN		I/O	SYSTEM SIDE	DESCRIPTION
NO.	NAME			
11	ML1(p)_IN	I	Controller	DisplayPort MainLink1(p) input
10	ML1(n)_IN			DisplayPort MainLink1(n) input
24	TRI#			Tri-State control (see TRUTH TABLE)
6	DP_EN#			DisplayPort Enable, active-low (see TRUTH TABLE)
15	10G_EN			10.3Gbps Mode Enable (see TRUTH TABLE)
18	CAD_IN		Connector	Cable Detect
17	HPD_IN			Hot Plug Detect
2	AUX(p)	I/O	Controller	AUX Positive Signal
1	AUX(n)			AUX Negative Signal
5	DDC_SCL			DDC Clock
4	DDC_SDA			DDC Data
14	LSTX			UART TX Signal
13	LSRX			UART RX Signal
22	10G(p)		Connector	10G_RX1(p) or AUX(p) or DDC_SCL, with pull-down
23	10G(n)			10G_RX1(n) or AUX(n) or DDC_SDA, with pull-up
19	ML1(p)_OUT			DisplayPort MainLink1(p) output or LSTX
20	ML1(n)_OUT			DisplayPort MainLink1(n) output or LSRX
8	10G_RX1(p)	O	Controller	10.3Gbps Positive Signal
7	10G_RX1(n)			10.3Gbps Negative Signal
16	CAD_OUT			Cable Detect
12	HPD_OUT			Hot Plug Detect
3	V _{DD}	Power Supply		Power supply
9, 21, Center Pad	GND			Reference ground

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

Over operating free-air temperature range (unless otherwise noted)

		VALUE		UNIT
		MIN	MAX	
Supply voltage range ⁽²⁾	V _{DD}	−0.5	4	V
Voltage range	Differential I/O	−0.5	4	V
	Control pin/buffers	−0.5	V _{DD} +0.5	
Electrostatic discharge	Human body model ⁽³⁾		±1,500	V
	Charged-device model ⁽⁴⁾		±500	
Continuous power dissipation		See Power Characteristics		

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values, except differential voltages, are with respect to network ground terminal.
- (3) Tested in accordance with JEDEC/ESDA JS-001-2011
- (4) Tested in accordance with JEDEC JESD22 C101-E

THERMAL INFORMATION

over operating free-air temperature range (unless otherwise noted)

THERMAL METRIC ⁽¹⁾		HD3SS0001	UNITS
		24-PIN VQFN (RLL)	
θ_{JA}	Junction-to-ambient thermal resistance	41.5	°C/W
θ_{JCTop}	Junction-to-case (top) thermal resistance	43.1	
θ_{JCbott}	Junction-to-case (bottom) thermal resistance	6.3	
θ_{JB}	Junction-to-board thermal resistance	11.2	
Ψ_{JT}	Junction-to-top characterization parameter	1.2	
Ψ_{JB}	Junction-to-board characterization parameter	11.2	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

POWER CHARACTERISTICS

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX ⁽¹⁾	UNIT
I_{DD}	Supply Current in Active Mode	Outputs Floating		1.0	1.3	mA
I_{DETECT}	Supply Current in Detect Mode	DP_EN# = 1, 10G_EN = 0		26	50	μA
P_D	Power Dissipation in Active Mode			3.3	4.7	mW
P_{Detect}	Power Dissipation in Detect Mode			80	150	μW

(1) The maximum ratings are simulated for $V_{DD} = 3.6V$.

RECOMMENDED OPERATING CONDITIONS

Typical values for all parameters are at $V_{DD} = 3.3V$ and $T_A = 25^{\circ}C$. (Temperature limits are specified by design)

PARAMETER	NOTES/CONDITIONS	MIN	TYP	MAX	UNIT
V_{DD}	Supply voltage	3.0	3.3	3.6 ⁽¹⁾	V
T_A	Operating free-air temperature	–40		85	°C
V_{IH}	CAD_IN, HPD_IN ⁽²⁾ , TRI#, DP_EN#, and 10G_EN	2.0		V_{DD}	V
	ML1(n)_OUT (when 2:1 MUX selects LS)	2.0		V_{DD}	
V_{IL}	CAD_IN, HPD_IN ⁽²⁾ , TRI#, DP_EN#, and 10G_EN	–0.1		0.8	V
	ML1(n)_OUT (when 2:1 MUX selects LS)	–0.1		0.8	
V_{OH}	CAD_OUT, HPD_OUT	2.7		V_{DD}	V
	LSRX (when 2:1 MUX selects LS)	2.7		V_{DD} ⁽¹⁾	
V_{OL}	CAD_OUT, HPD_OUT	0.0		0.1	V
	LSRX (when 2:1 MUX selects LS)	0.0		0.1	
I_{IH}	TRI#, DP_EN#, 10G_EN, CAD_IN, and HPD_IN; $V_{DD} = 3.6V$, $V_{IN} = V_{DD}$			5	μA
	ML1(n)_OUT; $V_{DD} = 3.6V$; $V_{IN} = V_{DD}$ (when 2:1 MUX selects LS)			3.75	
I_{IL}	TRI#, DP_EN#, 10G_EN, CAD_IN, and HPD_IN; $V_{DD} = 3.6V$, $V_{IN} = GND$			100	nA
	ML1(n)_OUT; $V_{DD} = 3.6V$, $V_{IN} = GND$ (when 2:1 MUX selects LS)			100	
V_{I/O_Diff}	AUX(p)/AUX(n), 10G_RX1(p)/ 10G_RX1(n), ML1(p)_IN/ML1(n)_IN, 10G(p)/10G(n), and ML1(p)_OUT/ML1(n)_OUT when MUX's are connected to Differential Signals.	0		1.8	Vpp
V_{I/O_CM}	AUX(p)/AUX(n), 10G_RX1(p)/10G_RX1(n), ML1(p)_IN/ML1(n)_IN, 10G(p)/ 10G(n), and ML1(p)_OUT/ML1(n)_OUT when MUX's are connected to Differential Signals.	0		2.0	V

(1) V_{DD} range supports 3.0V to 3.6V, but for Thunderbolt products it is anticipated that the V_{DD} must be maintained at less than or equal to 3.4V to ensure that the V_{OH} on the LSRx do not exceed 3.4V.

(2) HPD_IN is 5V tolerant.

ELECTRICAL CHARACTERISTICS

(under recommended operation conditions)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
Thunderbolt™ Technology 10.3Gbps Link: 10G_RX1(p), 10G_RX1(n) ⁽¹⁾					
R_L	Differential Return Loss	$f = 5.0\text{ GHz}$	–20		dB
I_L	Differential Insertion Loss	$f = 5.0\text{ GHz}$	–1.5		dB
O_{IRR}	Differential Off Isolation	$f = 5.0\text{ GHz}$ (see Figure 3)	–24		dB
X_{TALK}	Differential Crosstalk	$f = 5.0\text{ GHz}$	–35		dB
BW	Bandwidth	–3 dB	10		GHz
t_{PD}	Propagation Delay(from input to output)	R_{sc} and $R_L = 50\ \Omega$ (see Figure 2)		200	ps
T_{SKEW}	Intra-Pair Skew Added	R_{sc} and $R_L = 50\ \Omega$ (see Figure 2)		4	ps
C_{ON}	Outputs ON Capacitance	$V_I = 0\text{ V}$, Outputs Open, Switch ON	1.5		pF
C_{OFF}	Outputs OFF Capacitance	$V_I = 0\text{ V}$, Outputs Open Switch OFF	1		pF
R_{ON}	Output ON resistance	$V_{DD} = 3.3\text{ V}$, $I_O = -15\ \mu A$	7.5		Ω
ΔR_{ON}	On resistance match between pairs of the same channel	$V_{DD} = 3.3V$; $I_O = -15\ \mu A$		1	Ω
T_{ON}	Control Line Change to MUX Output Switched	See Figure 1		400	μs
T_{OFF}				10	

(1) These values apply for CAD_IN tri-stated, unless otherwise noted.

ELECTRICAL CHARACTERISTICS (continued)

(under recommended operation conditions)

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNIT
DisplayPort Link: ML1(p)_IN, ML1(n)_IN						
R _L	Differential Return Loss	f = 2.7 GHz		–16		dB
I _L	Differential Insertion Loss	f = 2.7 GHz; V _{CM} = 0 V		–0.8		dB
O _{IRR}	Differential Off-Isolation	f = 2.7 GHz (see Figure 3)		–20		dB
X _{TALK}	Differential Crosstalk	f = 2.7 GHz		–35		dB
BW	Differential Bandwidth	–3 dB		7		GHz
t _{PD}	Propagation Delay(from input to output)	R _{SC} and R _L = 50 Ω (see Figure 2)			200	ps
T _{SKEW}	Intra-pair Skew Added	R _{SC} and R _L = 50 Ω (see Figure 2)			4	ps
C _{ON}	Outputs ON Capacitance	V _I = 0 V; Outputs Open; Switch ON		1.5		pF
C _{OFF}	Outputs OFF Capacitance	V _I = 0 V; Outputs Open; Switch OFF		1		pF
R _{ON}	Output ON resistance	V _{DD} = 3.3 V; I _O = –15 mA; V _{CM} = 0.5 V to 1.5 V; CAD_IN = 0 V		6	8	Ω
ΔR _{ON}	On resistance match between pairs of the same channel	V _{DD} = 3.3 V; I _O = -15 mA; V _{CM} = 0.5 V to 1.5 V			1	Ω
T _{ON}	Control Line Change to MUX Output Switched	See Figure 1			400	μs
T _{OFF}					10	
Thunderbolt™ Technology Low Speed UART : LSTX						
C _{ON}	Outputs ON capacitance	V _I = 0 V , Outputs Open, Switch ON		8		pF
C _{OFF}	Outputs OFF capacitance	V _I = 0 V, Outputs Open, Switch OFF		3		pF
R _{ON}	Output ON resistance	V _{DD} = 3 V, V _{CM} = 0 V to 3 V, I _O = –1 mA CAD_IN = 0 V		12	19	Ω
t _{PD}	Propagation Delay	LSTX to ML1(p)_OUT		200		ps
DisplayPort: AUX(p), AUX(n)						
C _{ON}	Outputs ON Capacitance	V _I = 0 V; Outputs Open; Switch ON		6		pF
C _{OFF}	Outputs OFF Capacitance	V _I = 0 V; Outputs Open; Switch OFF		3		pF
R _{ON}	Output ON resistance	V _{DD} = 3.3V; I _O = –10 mA; AUX(p) = 0.3 V; AUX(n) = 3.0 V; CAD_IN = 0 V		12		Ω
ΔR _{ON}	On resistance match between pairs of the same channel	V _{DD} = 3.3 V; I _O = –10 mA; V _{CM} = 0.5 V to 1.5 V			1	Ω
T _{ON}	Control line change to Mux output switched	See Figure 2			40	ms
T _{OFF}					10	μs
Thunderbolt Technology Low Speed UART : LSRX						
C _{ON}	Outputs capacitance			3		pF
Z _O	Output impedance	V _{DD} = 3.3 V		60		Ω
t _{PD}	Propagation delay	ML1(n)_OUT to LSRX		3.2		ns
t _r	Rise Time	V _{DD} = 3 V		3		ns
t _f	Fall Time	V _{DD} = 3 V		3		ns
T _{ON}	Control line change to MUX Output Switched	See Figure 1			400	μs
T _{OFF}					10	μs

ELECTRICAL CHARACTERISTICS (continued)

(under recommended operation conditions)

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNIT
DisplayPort : DDC_SCL, DDC_SDA						
C _{ON}	Outputs ON capacitance	V _I = 0 V, Outputs Open, Switch ON		9		pF
C _{OFF}	Outputs OFF capacitance	V _I = 0 V, Outputs Open, Switch OFF		3		pF
R _{ON}	Output ON resistance	V _{DD} = 3.3 V, I _O = −10 mA, V _{CM} = 0.4 V, CAD_IN = 3.3 V		80	150	Ω
T _{ON}	Control line change to MUX output switched	See Figure 1		400	μs	
T _{OFF}				10		
UART and 10G MUX Outputs : LSTX/LSRX/10G(p)/10G(n)						
R1	Integrated Pullup Resistance	10G(n) pin when in DP, TMDS, or Detect Mode		87	105	kΩ
R2	Integrated Pulldown Resistance	10G(p) pin when in DP, TMDS, or Detect Mode, or VDD = 0V		87	105	kΩ
R _{PU}	Integrated pullup resistance	LSTX		8.7		kΩ
R _{PD}	Integrated pulldown resistance	LSRX		1.2		MΩ

TEST DIAGRAMS

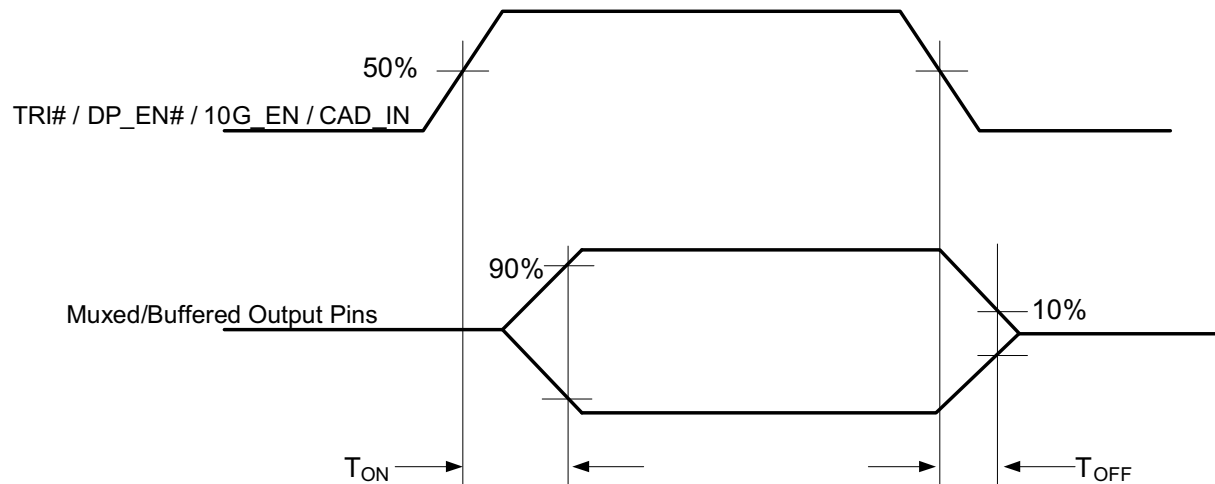


Figure 1. Control Line Change to Switched Signals

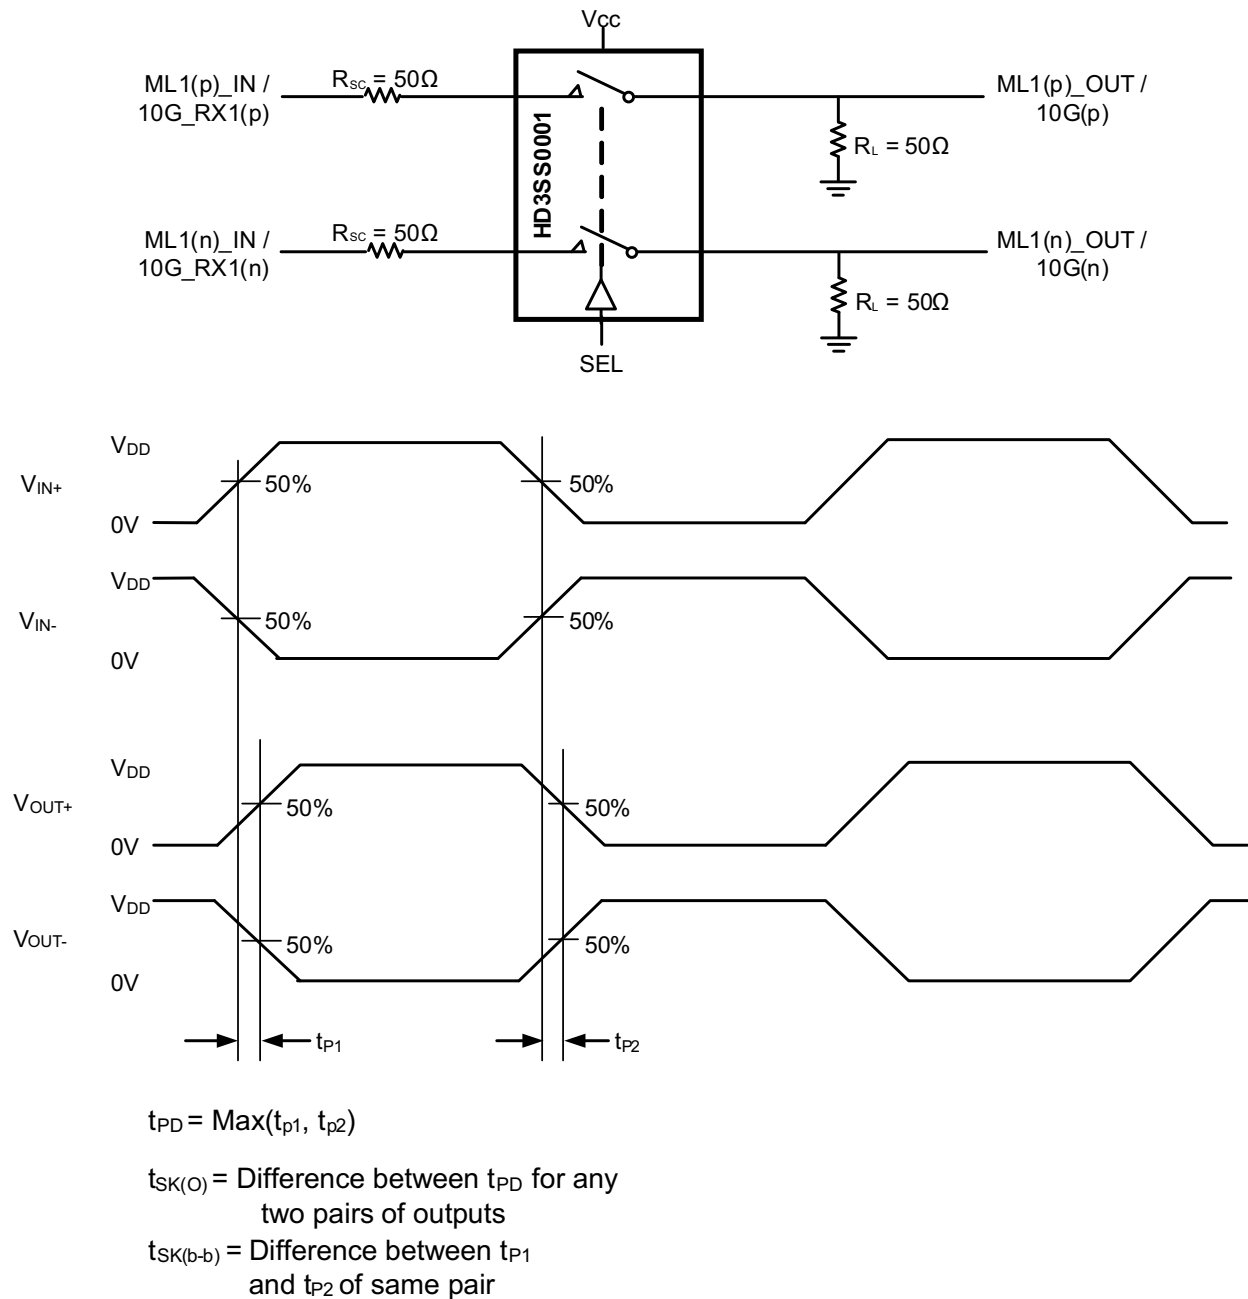


Figure 2. Propagation Delay and Skew

HD3SS0001

SLAS827 –SEPTEMBER 2013

www.ti.com

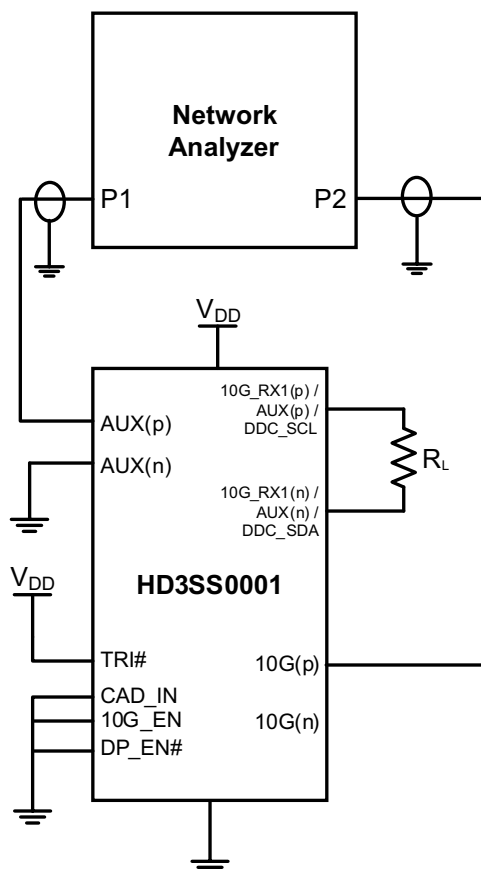


Figure 3. Off-Isolation Measurement Setup

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
HD3SS0001RLLR	Active	Production	VQFN (RLL) 24	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	3SS001
HD3SS0001RLLR.B	Active	Production	VQFN (RLL) 24	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	3SS001


- ⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).
- ⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- ⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.
- ⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- ⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- ⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


TAPE AND REEL INFORMATION

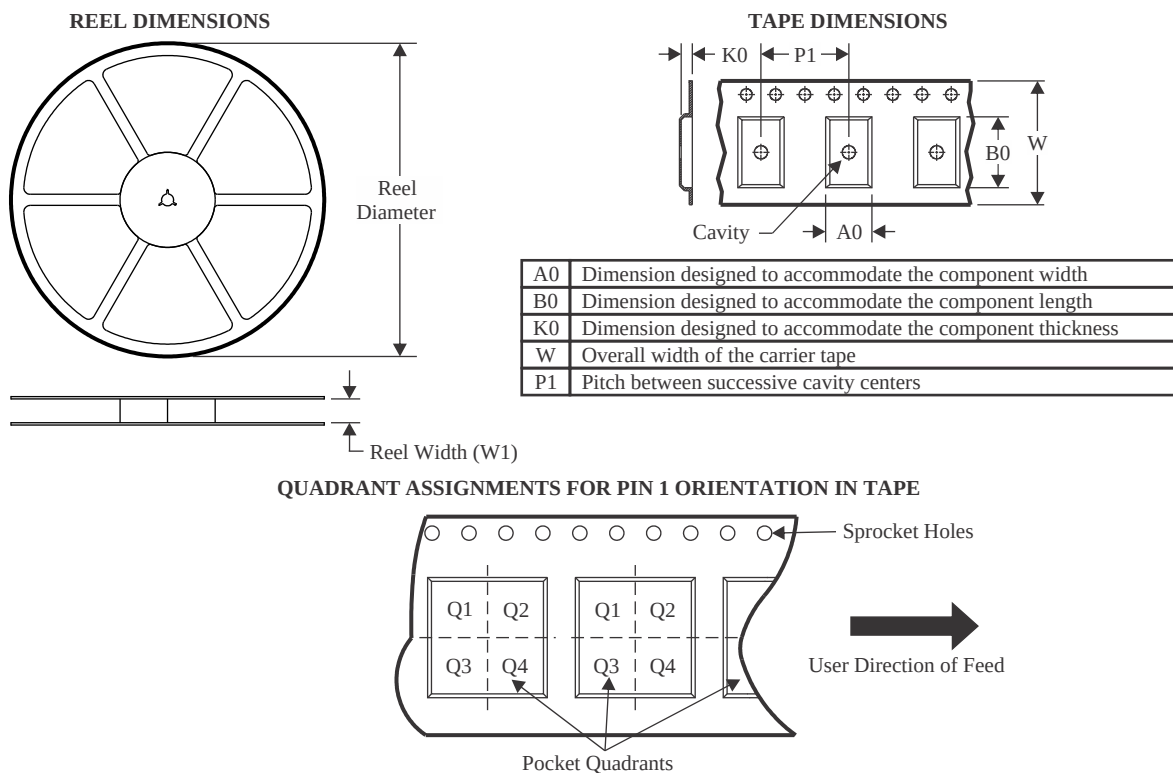

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
HD3SS0001RLLR	VQFN	RLL	24	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2

TAPE AND REEL BOX DIMENSIONS

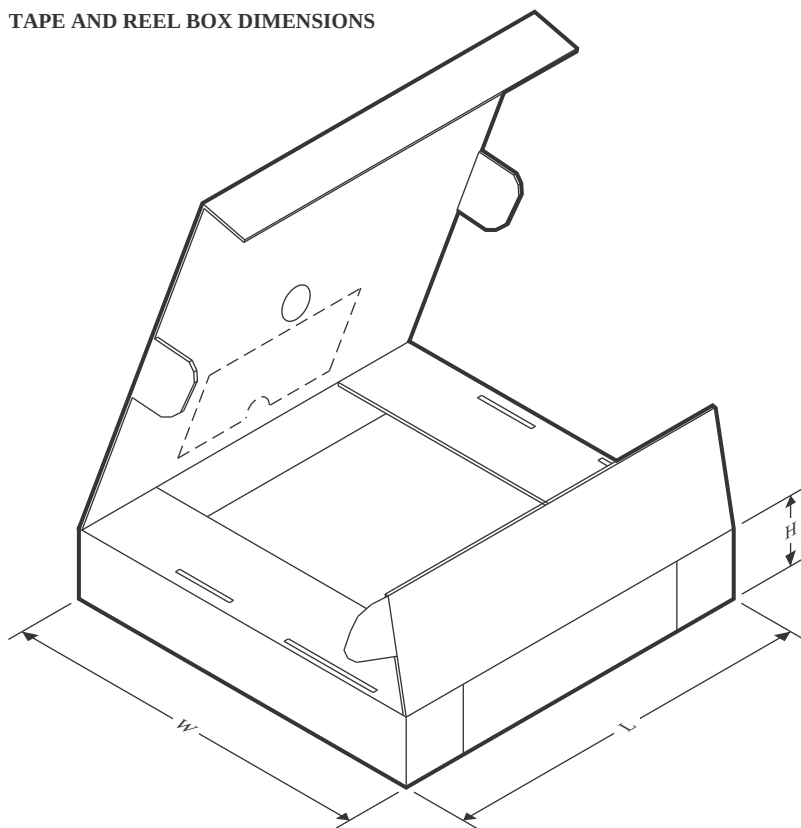


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
HD3SS0001RLLR	VQFN	RLL	24	3000	346.0	346.0	33.0

RLL (S-PVQFN-N24)

PLASTIC QUAD FLATPACK NO-LEAD

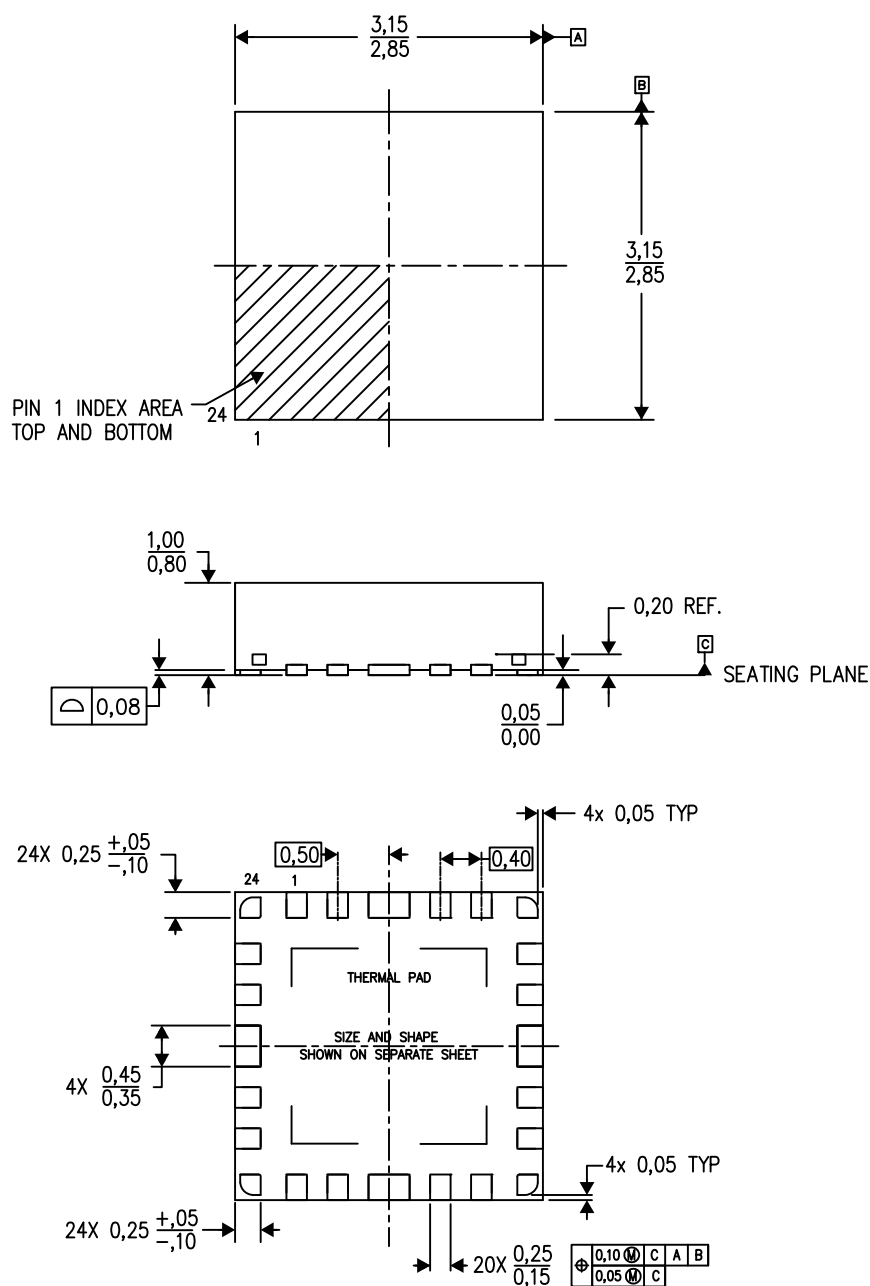


4214704/C 08/13

- NOTES:
- All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - This drawing is subject to change without notice.
 - Quad Flatpack, No-leads (QFN) package configuration.
 - The package thermal pad must be soldered to the board for thermal and mechanical performance.
 - See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.

RLL0024A

VQFN - 0.9 mm max height



PLASTIC QUAD FLATPACK - NO LEAD

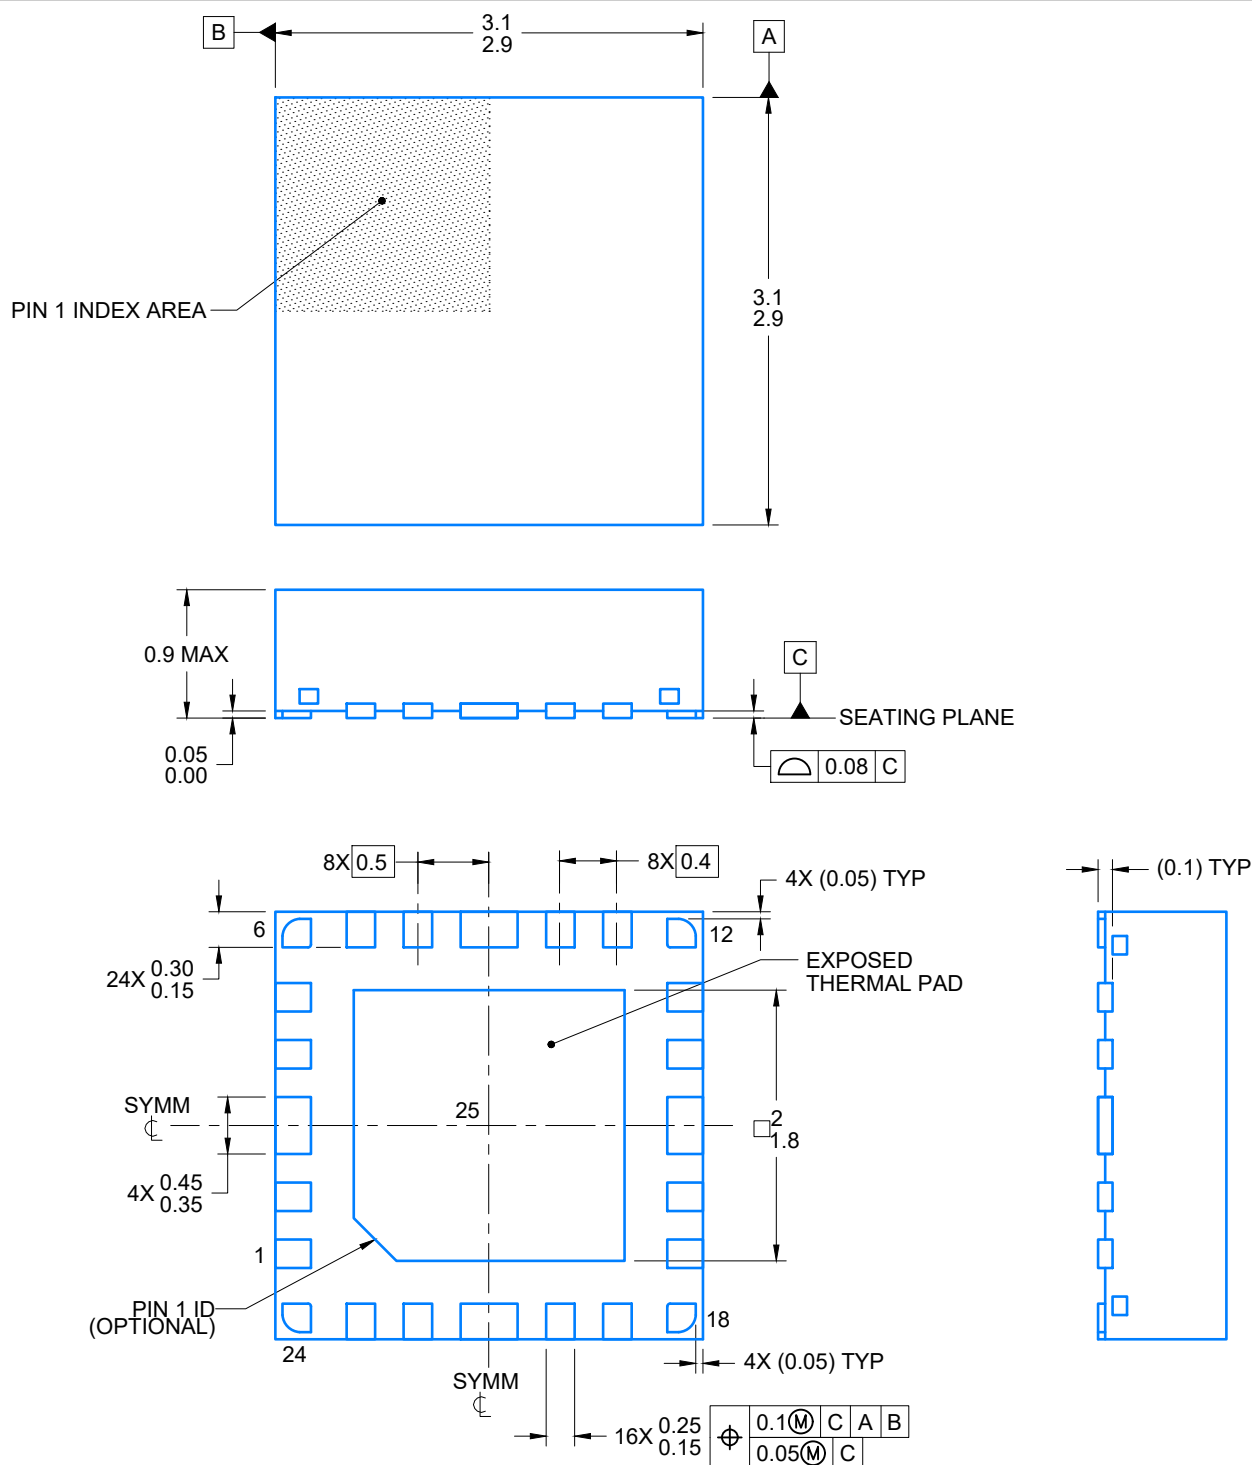

4217760 / C 11/2021


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

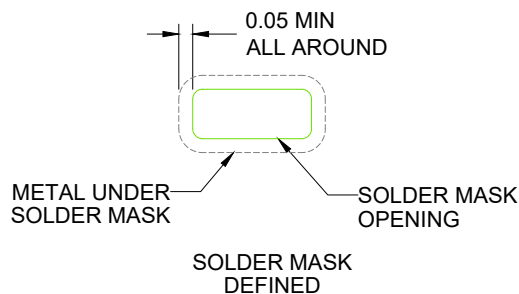

4217760 / C 10/2021

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slue271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

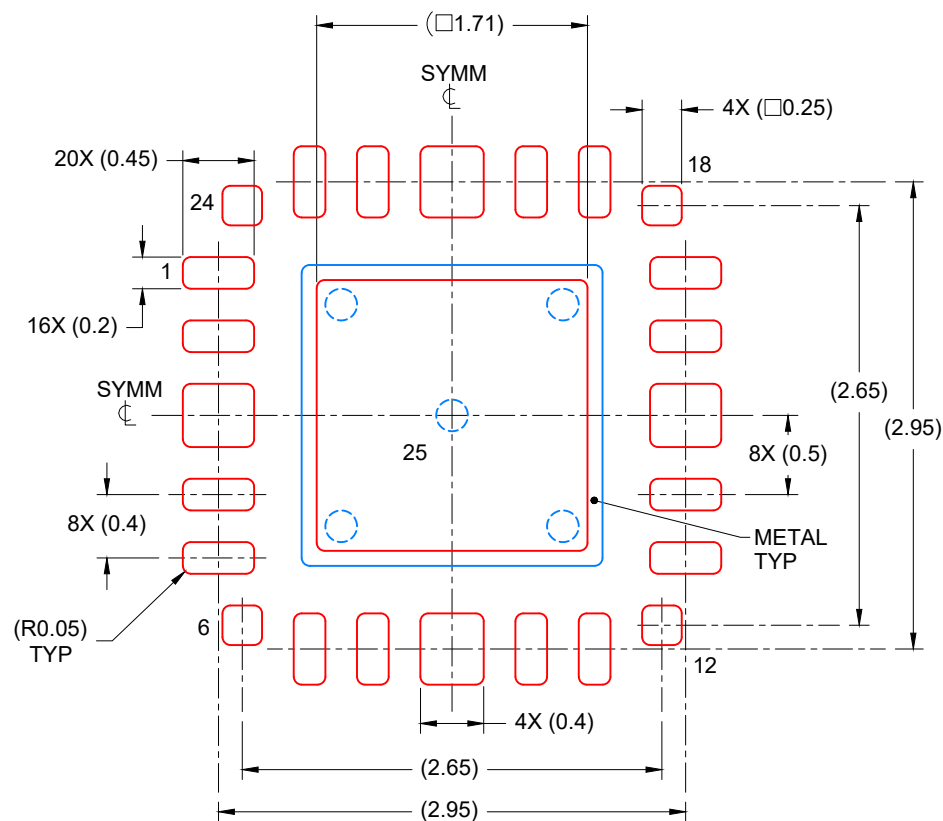

SOLDER PASTE EXAMPLE
BASED ON 0.1 mm THICK STENCIL

EXPOSED PAD
81% PRINTED COVERAGE BY AREA
SCALE: 20X

4217760 / C 10/2021

NOTES: (continued)

- Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations..

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated