

N-Channel JFET

15 V, 16 to 50 mA, 29 mS, MCPH3

MCH3914

Features

- |yfs| is Large
- Ciss is Small
- Small Package
- FBET Process
- Pb-Free, Halogen Free/BFR Free and RoHS Compliant

Specifications


ABSOLUTE MAXIMUM RATINGS at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Drain-to-Source Voltage	V_{DSX}		15	V
Gate-to-Drain Voltage	V_{GDS}		-15	V
Gate Current	I_G		5	mA
Drain Current	I_D		50	mA
Allowable Power Dissipation	P_D	When mounted on ceramic substrate (600 mm ² x 0.8 mm)	300	mW
Junction Temperature	T_J		150	°C
Storage Temperature	T_{stg}		-55 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


NOTE: This product is designed to "ESD immunity < 200 V*", so please take care when handling.

* Machine Model




MCPH3
CASE 419AQ

MARKING DIAGRAM



J = Specific Device Code

ELECTRICAL CONNECTION



ORDERING INFORMATION

Device	Package	Shipping†
MCH3914-7-TL-H	MCPH3 (Pb-Free, Halogen Free)	3000 / Tape & Reel
MCH3914-8-TL-H		

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, [BRD8011/D](#).

MCH3914

ELECTRICAL CHARACTERISTICS at $T_A = 25^\circ\text{C}$







Parameter	Symbol	Conditions	Ratings			Unit
			Min	Typ	Max	
Gate-to-Drain Breakdown Voltage	$V_{(BR)GDS}$	$I_G = -10\ \mu\text{A}$, $V_{DS} = 0\ \text{V}$	-15	-	-	V
Gate-to-Source Leakage Current	I_{GSS}	$V_{GS} = -10\ \text{V}$, $V_{DS} = 0\ \text{V}$	-	-	-1.0	nA
Cutoff Voltage	$V_{GS(off)}$	$V_{DS} = 5\ \text{V}$, $I_D = 10\ \mu\text{A}$	-0.6	-1.4	-3.0	V
Zero-Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 5\ \text{V}$, $V_{GS} = 0\ \text{V}$	16.0*	-	50.0*	mA
Forward Transfer Admittance	$ y_{fs} 1$	$V_{DS} = 5\ \text{V}$, $I_D = 10\ \text{mA}$, $f = 1\ \text{kHz}$	14	21	-	mS
	$ y_{fs} 2$	$V_{DS} = 5\ \text{V}$, $V_{GS} = 0\ \text{V}$, $f = 1\ \text{kHz}$	14	29	-	mS
Input Capacitance	C_{iss}	$V_{DS} = 5\ \text{V}$, $V_{GS} = 0\ \text{V}$, $f = 1\ \text{MHz}$	-	4.9	-	pF
Reverse Transfer Capacitance	C_{rss}		-	1.4	-	pF

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

* The MCH3914 is classified by I_{DSS} as follows:

Rank	7	8	Unit
I_{DSS}	16.0 to 32.0	25.0 to 50.0	mA

TYPICAL CHARACTERISTICS

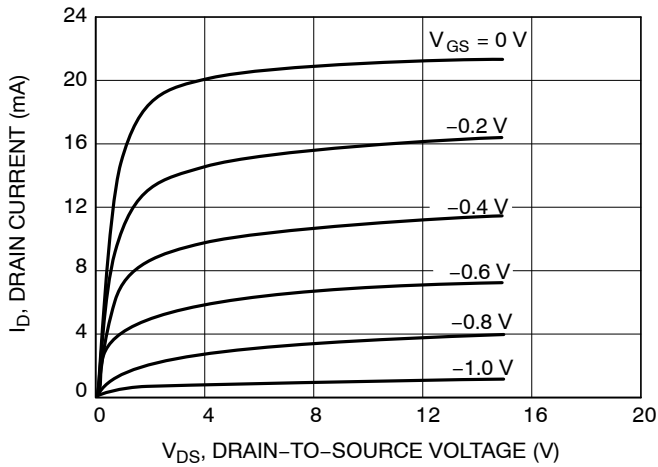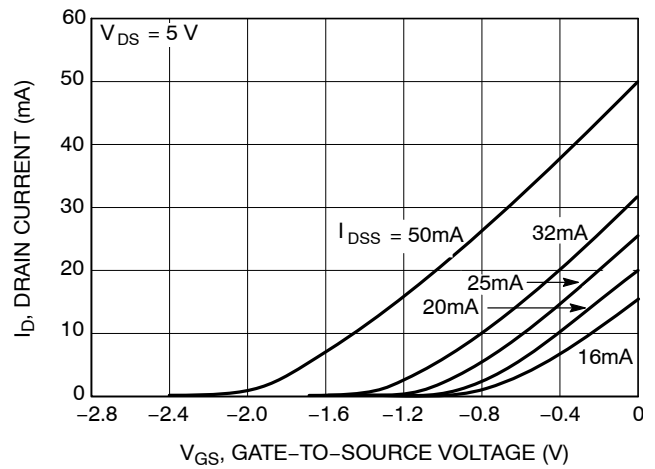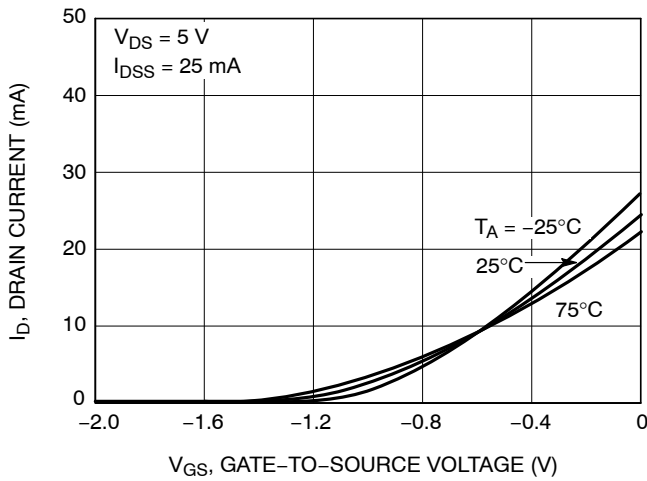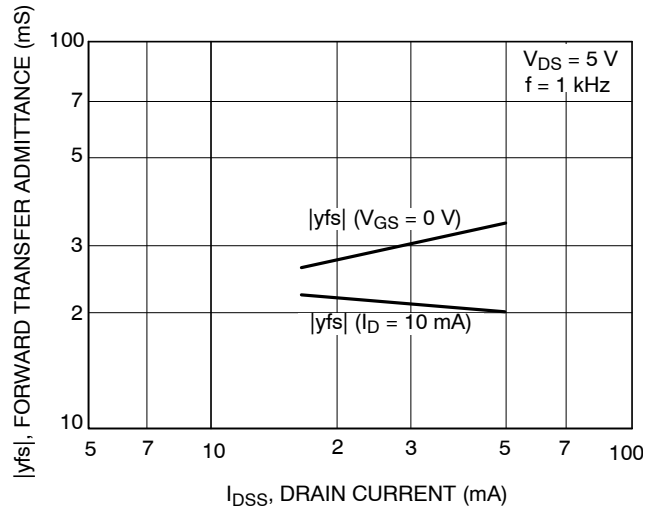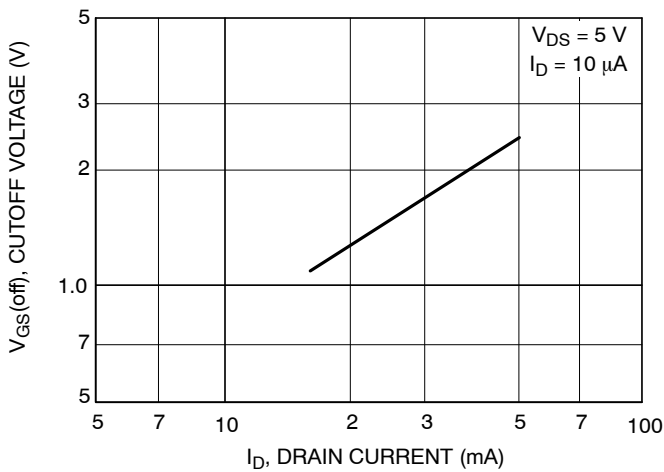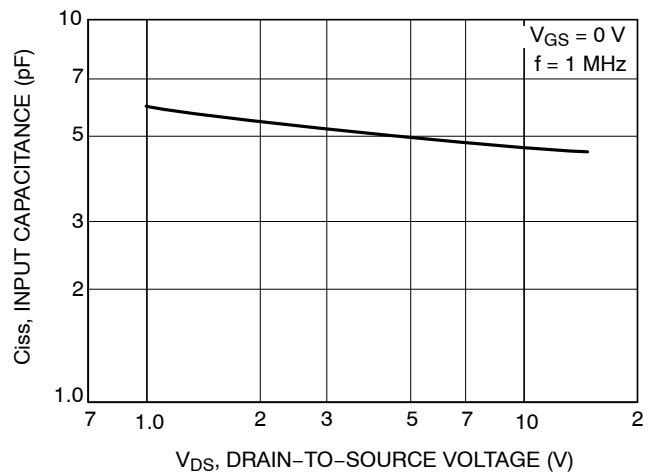Figure 1. $I_D - V_{DS}$ Figure 2. $I_D - V_{GS}$ Figure 3. $I_D - V_{GS}$ Figure 4. $|y_{fs}| - I_{DSS}$ Figure 5. $V_{GS(off)} - I_{DSS}$ Figure 6. $C_{iss} - V_{DS}$

TYPICAL CHARACTERISTICS (CONTINUED)

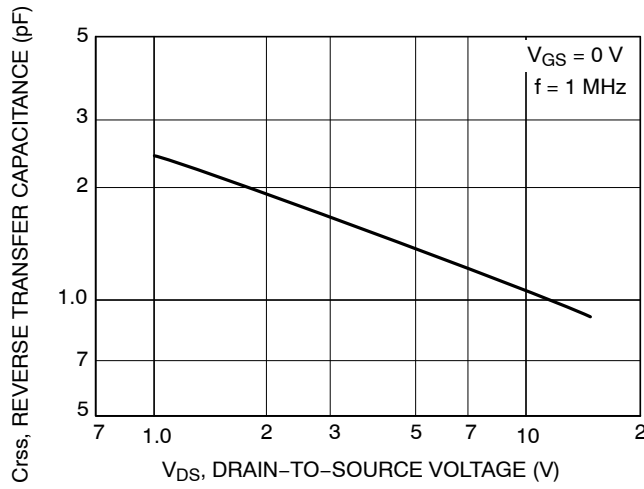


Figure 7. $C_{rss} - V_{DS}$

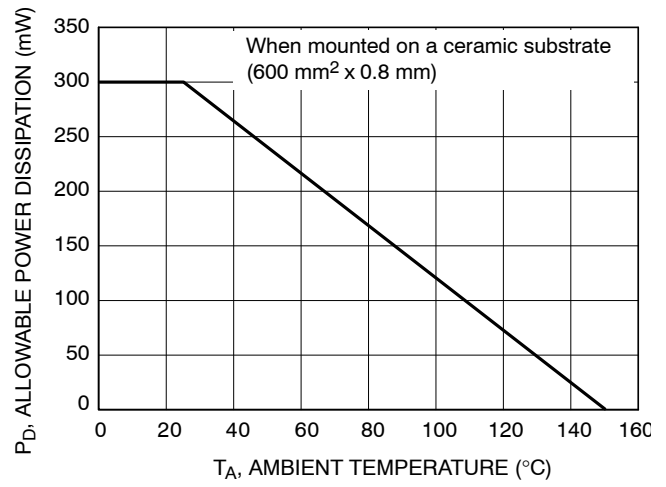


Figure 8. $P_D - T_A$

LAND PATTERN EXAMPLE





Figure 9. Land Pattern Example

SC-70FL / MCPH3
CASE 419AQ
ISSUE O

DATE 30 DEC 2011

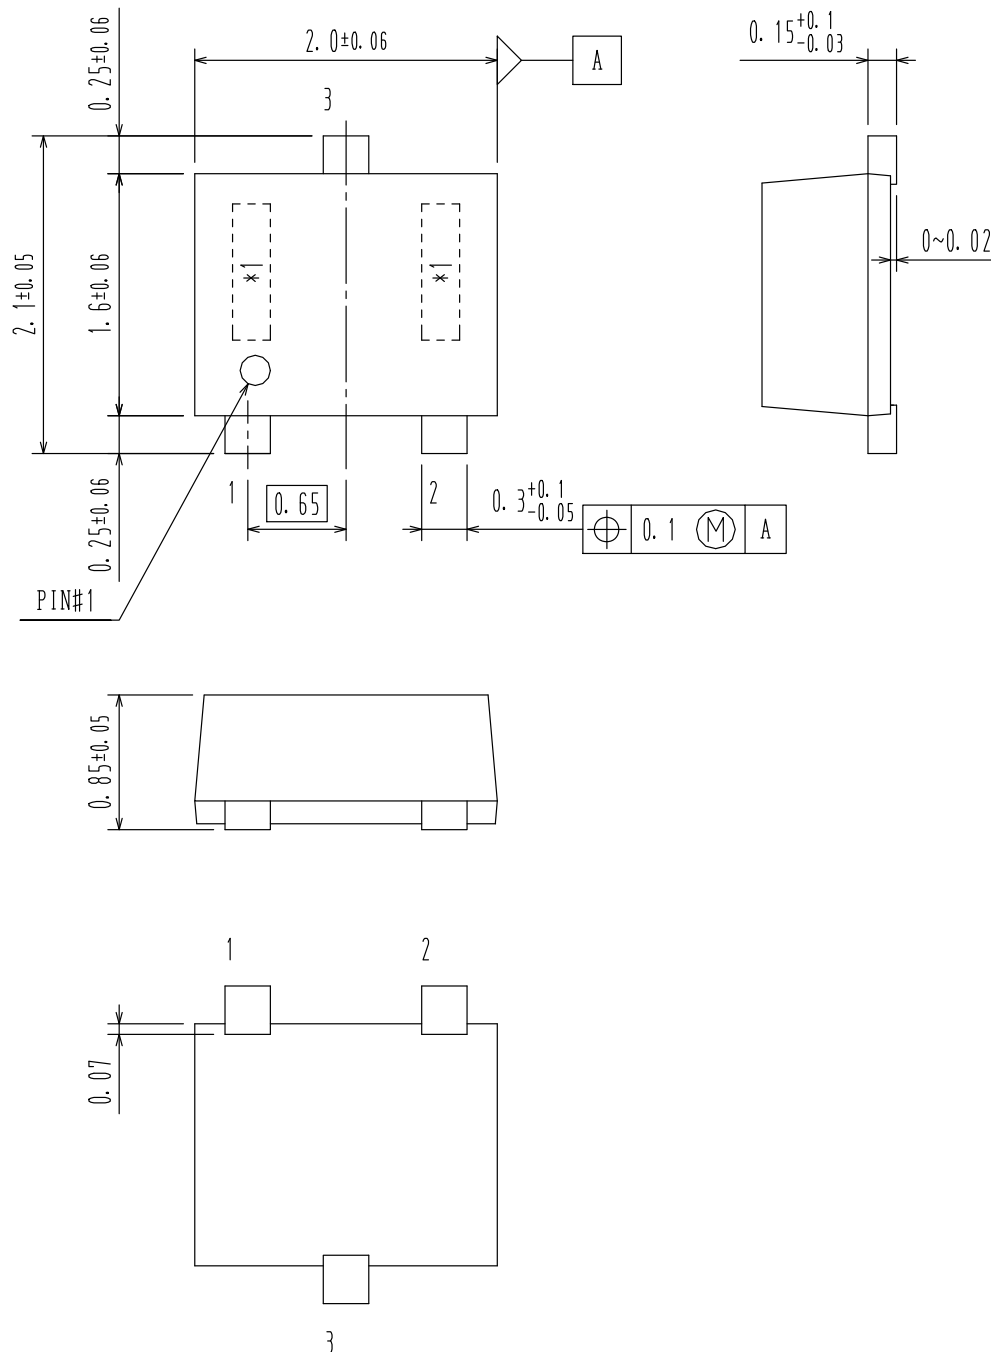

DOCUMENT NUMBER:	98AON65644E	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	SC-70FL / MCPH3	PAGE 1 OF 1

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales